



# MDT Features and Options

Model	198	258	268	338	358
	(6 cyl.)	(6 cyl.)	(6 cyl.)	(6 cyl.)	(6 cyl.)
	[..... 220hp/520lb.-ft torque .....]			[ 260hp/660lb.-ft. torque ]	
<b>Interior Features &amp; Controls</b>					
Air conditioning	S	S	S	S	S
Power windows	S	S	S	S	S
Remote keyless entry	S	S	S	S	S
Cruise control	S	S	S	S	S
Driver information display with audible warnings	S	S	S	S	S
AM/FM/DVD with GPS & Bluetooth®	S	S	S	S	S
Backup camera	O	O	O	O	O
Accessory power, 12V	S	S	S	S	S
Dome light	S	S	S	S	S
Tilt & telescopic steering	S	S	S	S	S
Power & heated mirrors	S	S	S	S	S
Windshield wipers, 2-speed and intermittent	S	S	S	S	S
Fabric seats with passenger bench	S	S	S	S	S
Air suspension driver's seat	S	S	S	S	S
Driver's armrest	S	S	S	S	S
Genuine Hino seat covers	O	O	O	O	O
Genuine Hino floor mats	O	O	O	O	O
<b>Exterior Features</b>					
PPG custom paint <sup>1</sup>	O	O	O	O	O
Aluminum steps	O	O	O	O	O
Chrome front bumper, grille and mirrors	O	S	S	S	S
Custom chrome accessories	O	O	O	O	O
Aluminum wheels, Alcoa	O	O	O	O	O
Stainless steel wheel covers	O	O	O	O	O
Marker lamps, LED, roof mounted	S	S	S	S	S
Air deflector, roof mounted	O	O	O	O	O
<b>Chassis Features</b>					
Clean chassis	-	-	O	O	O
Heavy duty straight frame, 90,143 PSI	S	S	S	S	-
Heavy duty straight frame, 120,488 PSI	-	-	-	-	S
Rear air-ride suspension, Hendrickson	O	O	O	O	O
Automatic braking system (ABS)	S	S	S	S	S
Self adjusting clutch <sup>2</sup>	-	S	S	S	S
PTO capable	S	S	S	S	S
Locking rear differential	-	-	-	-	O
Aluminum fuel tank, 196L <sup>3</sup>	S	S	S	S	-
Aluminum fuel tank, 196L x 2 <sup>3</sup>	O	O	O	O	S
Locking fuel cap	O	O	O	O	O
Oil lubricated front wheel hubs	S	S	S	S	S
Synthetic transmission & differential fluid	S	S	S	S	S
Low profile tires, 295/75R22.5	-	-	-	O	-
Tow hook	S	S	S	S	S
<b>Engine &amp; Related Features</b>					
Selective Catalytic Reduction (SCR)	S	S	S	S	S
Engine exhaust brake	S	S	S	S	S
Vertical exhaust	O	O	O	O	O
Brushless alternator, 135A	S	S	S	S	S
Batteries, 1400CCA x 2	S	S	S	S	S
Third battery	O	O	O	O	O
Engine block heater, 1000W	S	S	S	S	S
Pre-heater, glow plugs	S	S	S	S	S
Hino long-life coolant	S	S	S	S	S

**NOTES:** 1 - Subject to factory production schedule  
 2 - Manual transmission models only  
 3 - Not available with clean chassis option

**S - Standard    O - Optional**

# Features & Specs



Model	198	258LP	268	338	358
<b>GVW (lbs.)</b>	<b>19,500</b>	<b>25,500</b>	<b>26,000</b>	<b>33,000</b>	<b>35,000</b>
<b>Axle Capacity (lbs.)</b>	F: 7,280/ R: 13,660	F: 8,000/ R: 17,500	F: 10,000/ R: 19,000	F: 12,000/ R: 21,000	F: 14,000/ R: 23,000
<b>Spring Capacity (lbs.)</b>	F: 8,000/ R: 19,000	F: 8,000/ R: 19,000	F: 12,000/ R: 19,000	F: 12,000/ R: 21,000	F: 14,000/ R: 23,000
<b>Engine (Hino)</b>	J08E-VC Diesel, 6-cylinder	J08E-VC Diesel, 6-cylinder	J08E-VC Diesel, 6-cylinder	J08E-VB Diesel, 6-cylinder	J08E-VB Diesel, 6-cylinder
<b>Max. Output (HP)</b>	220@2,500 rpm	220@2,500 rpm	220@2,500 rpm	260@2,500 rpm	260@2,500 rpm
<b>Max. Torque (lb.-ft)</b>	520@1,500 rpm	520@1,500 rpm	520@1,500 rpm	660@1,500 rpm	660@1,500 rpm
<b>Transmission</b>					
Standard	6-speed auto Allison 1000 RDS	6-speed direct drive Eaton FS5406A	6-speed direct drive Eaton FS5406A	6-speed direct drive Eaton FS6406A	6-speed direct drive Eaton FS6406A
Optional		6-speed auto Allison 2200 RDS	6-speed auto Allison 2200 RDS	6-speed auto Allison 2500 RDS	6-speed auto Allison 3000 RDS
<b>Service Brakes</b>	Hydraulic Disc Front & Rear	Hydraulic Disc Front & Rear	Hydraulic Disc Front & Rear	Hydraulic Disc Front & Rear	Full Air
<b>Wheels</b>	19.5" X 6.75", 8 stud disc	19.5" X 6.75", 8 stud disc	22.5" X 8.25", 10 stud	22.5" X 8.25", 10 stud	22.5" X 8.25", 10 stud
<b>Tire Size</b>	225/70R19.5	245/70R19.5	11R22.5	11R22.5	11R22.5

## Optional Clean Chassis

With nothing mounted on the outside of the frame rails behind the cab, the **clean chassis** configuration will be ideal for beverage bodies, towing applications and battery carriers.

See Dealer for wheelbase and transmission availability.

**Note: Dual fuel tank option not available with clean chassis configuration**

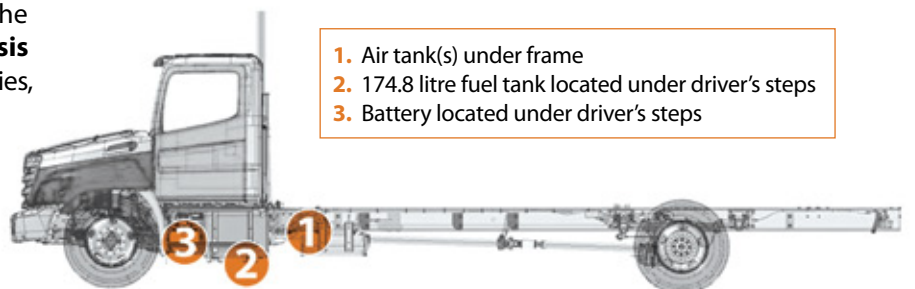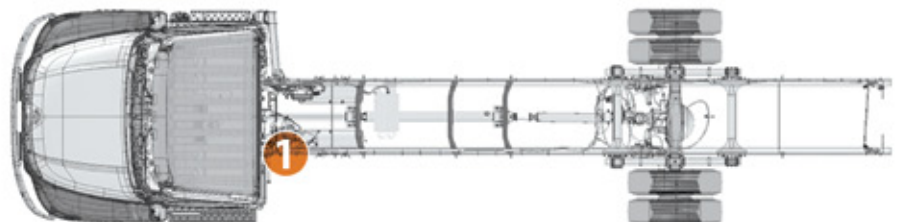

1. Air tank(s) under frame
2. 174.8 litre fuel tank located under driver's steps
3. Battery located under driver's steps