

# Chapter 12

## OTHERS DATA

---

1. SUSPENSION DEFLECTION CHART
2. BRAKE PIPING DIAGRAM
3. AUXILIARY AIR LINE
4. ELECTRIC WIRING DIAGRAM
5. CONNECTORS
6. METRIC/U.S. CUSTOMARY UNIT EQUIVALENTS

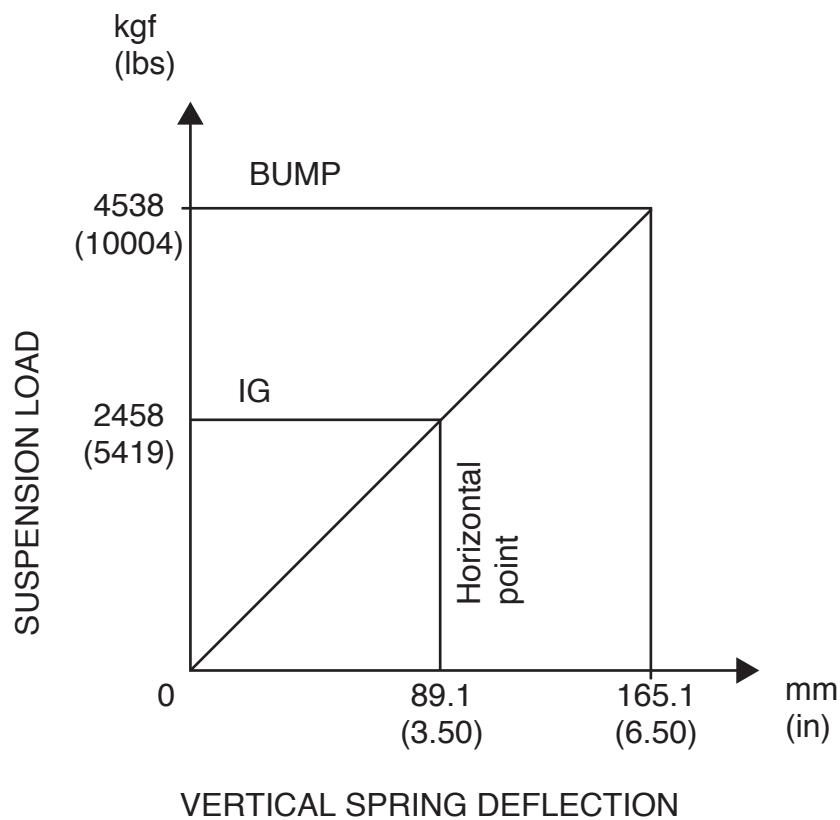
## 1. SUSPENSION DEFLECTION CHART

### • FRONT SPRING PER ONE SIDE

MODEL:NH

CAPACITY:12000lbs(STD)

K:27.6kgf/mm(1550lb/in)

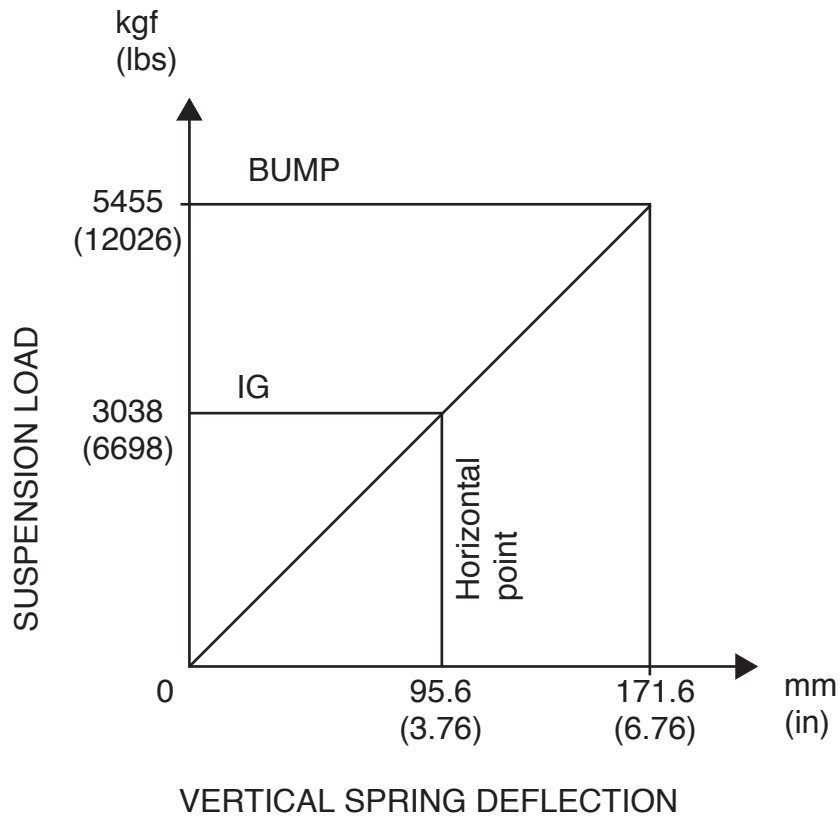




MODEL:ALL

CAPACITY:14600lbs(STD:NM, OPT: NH)

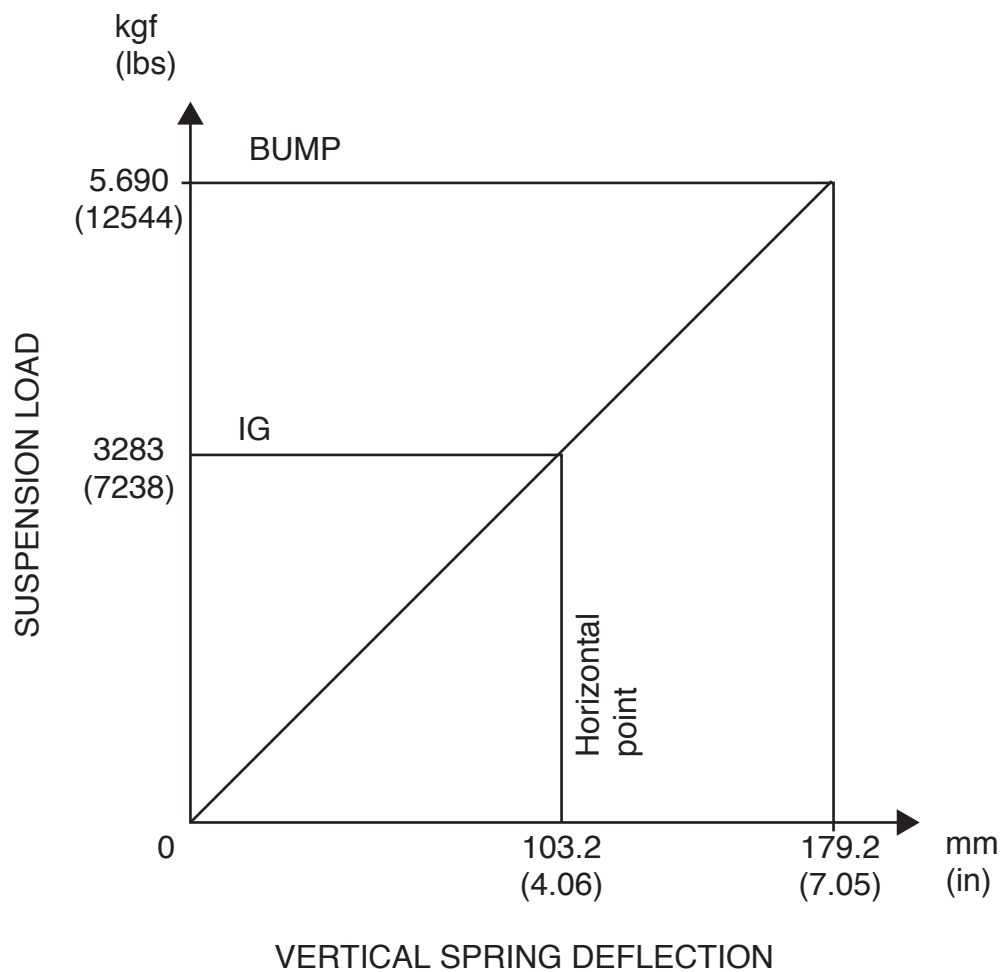
K:31.8kgf/mm(1780lb/in)



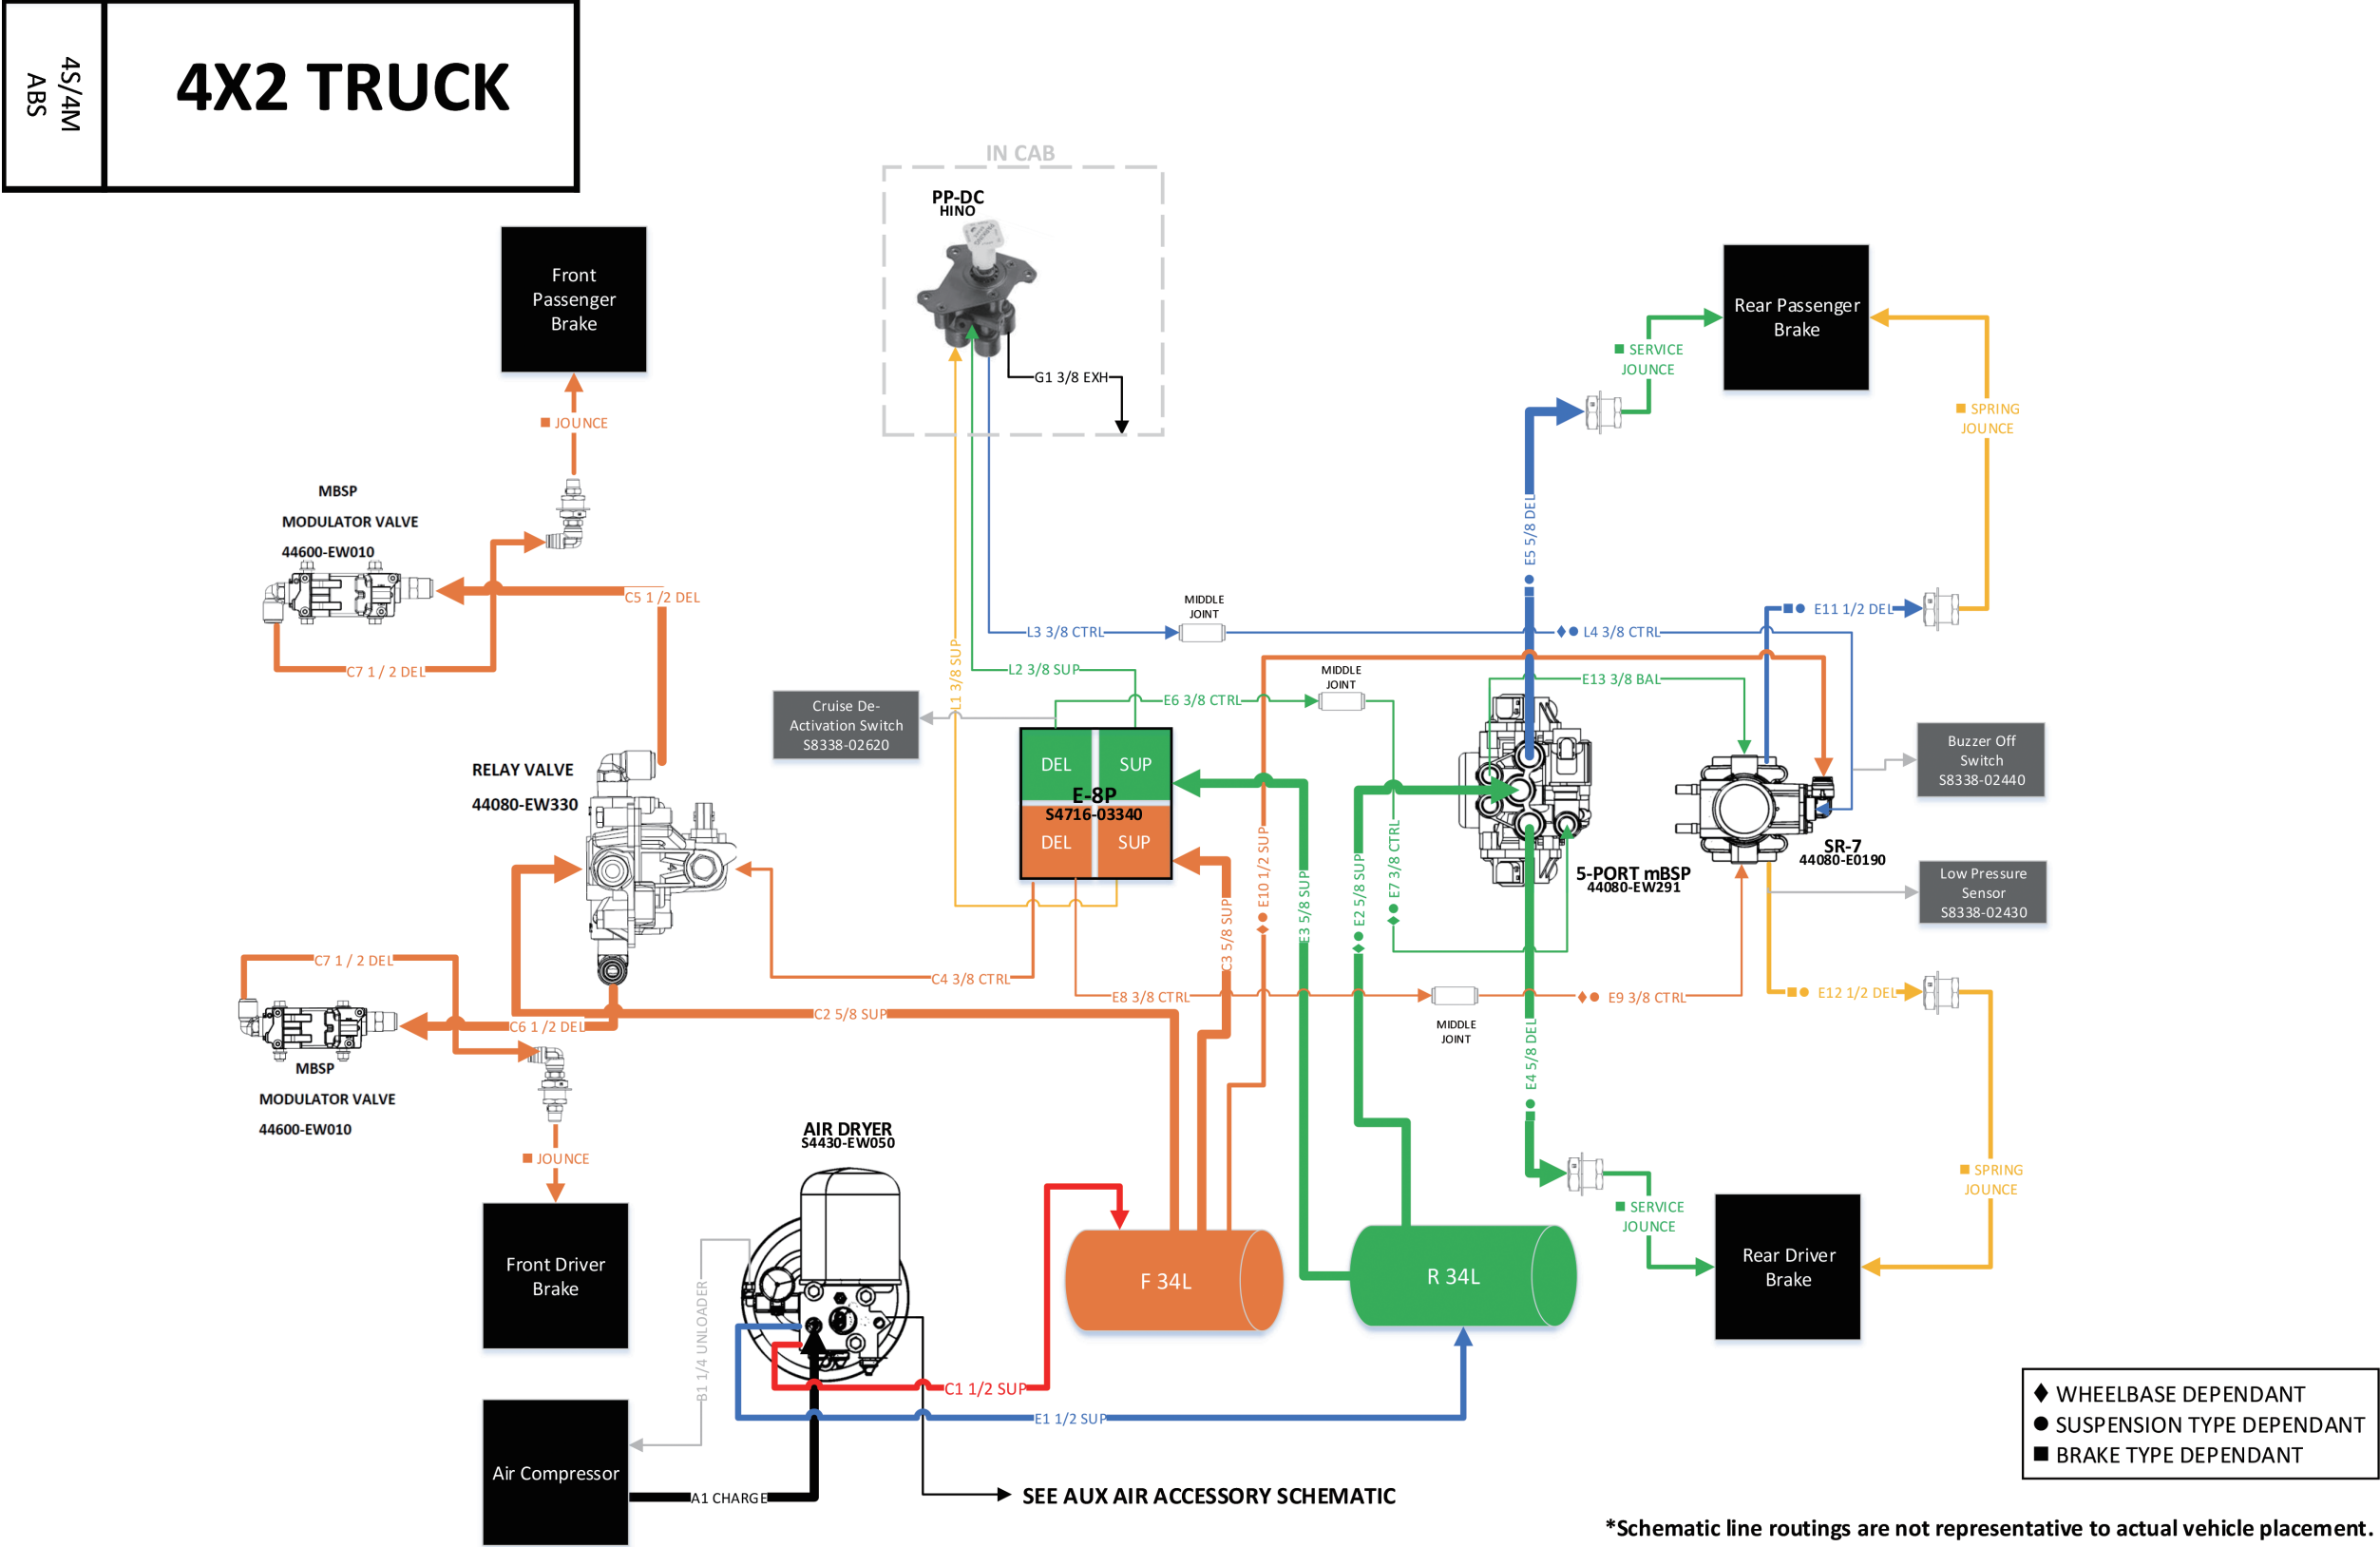
MODEL:NH, NM

CAPACITY:16000lbs(OPT)

K:31.8kgf/mm(1780lb/in)

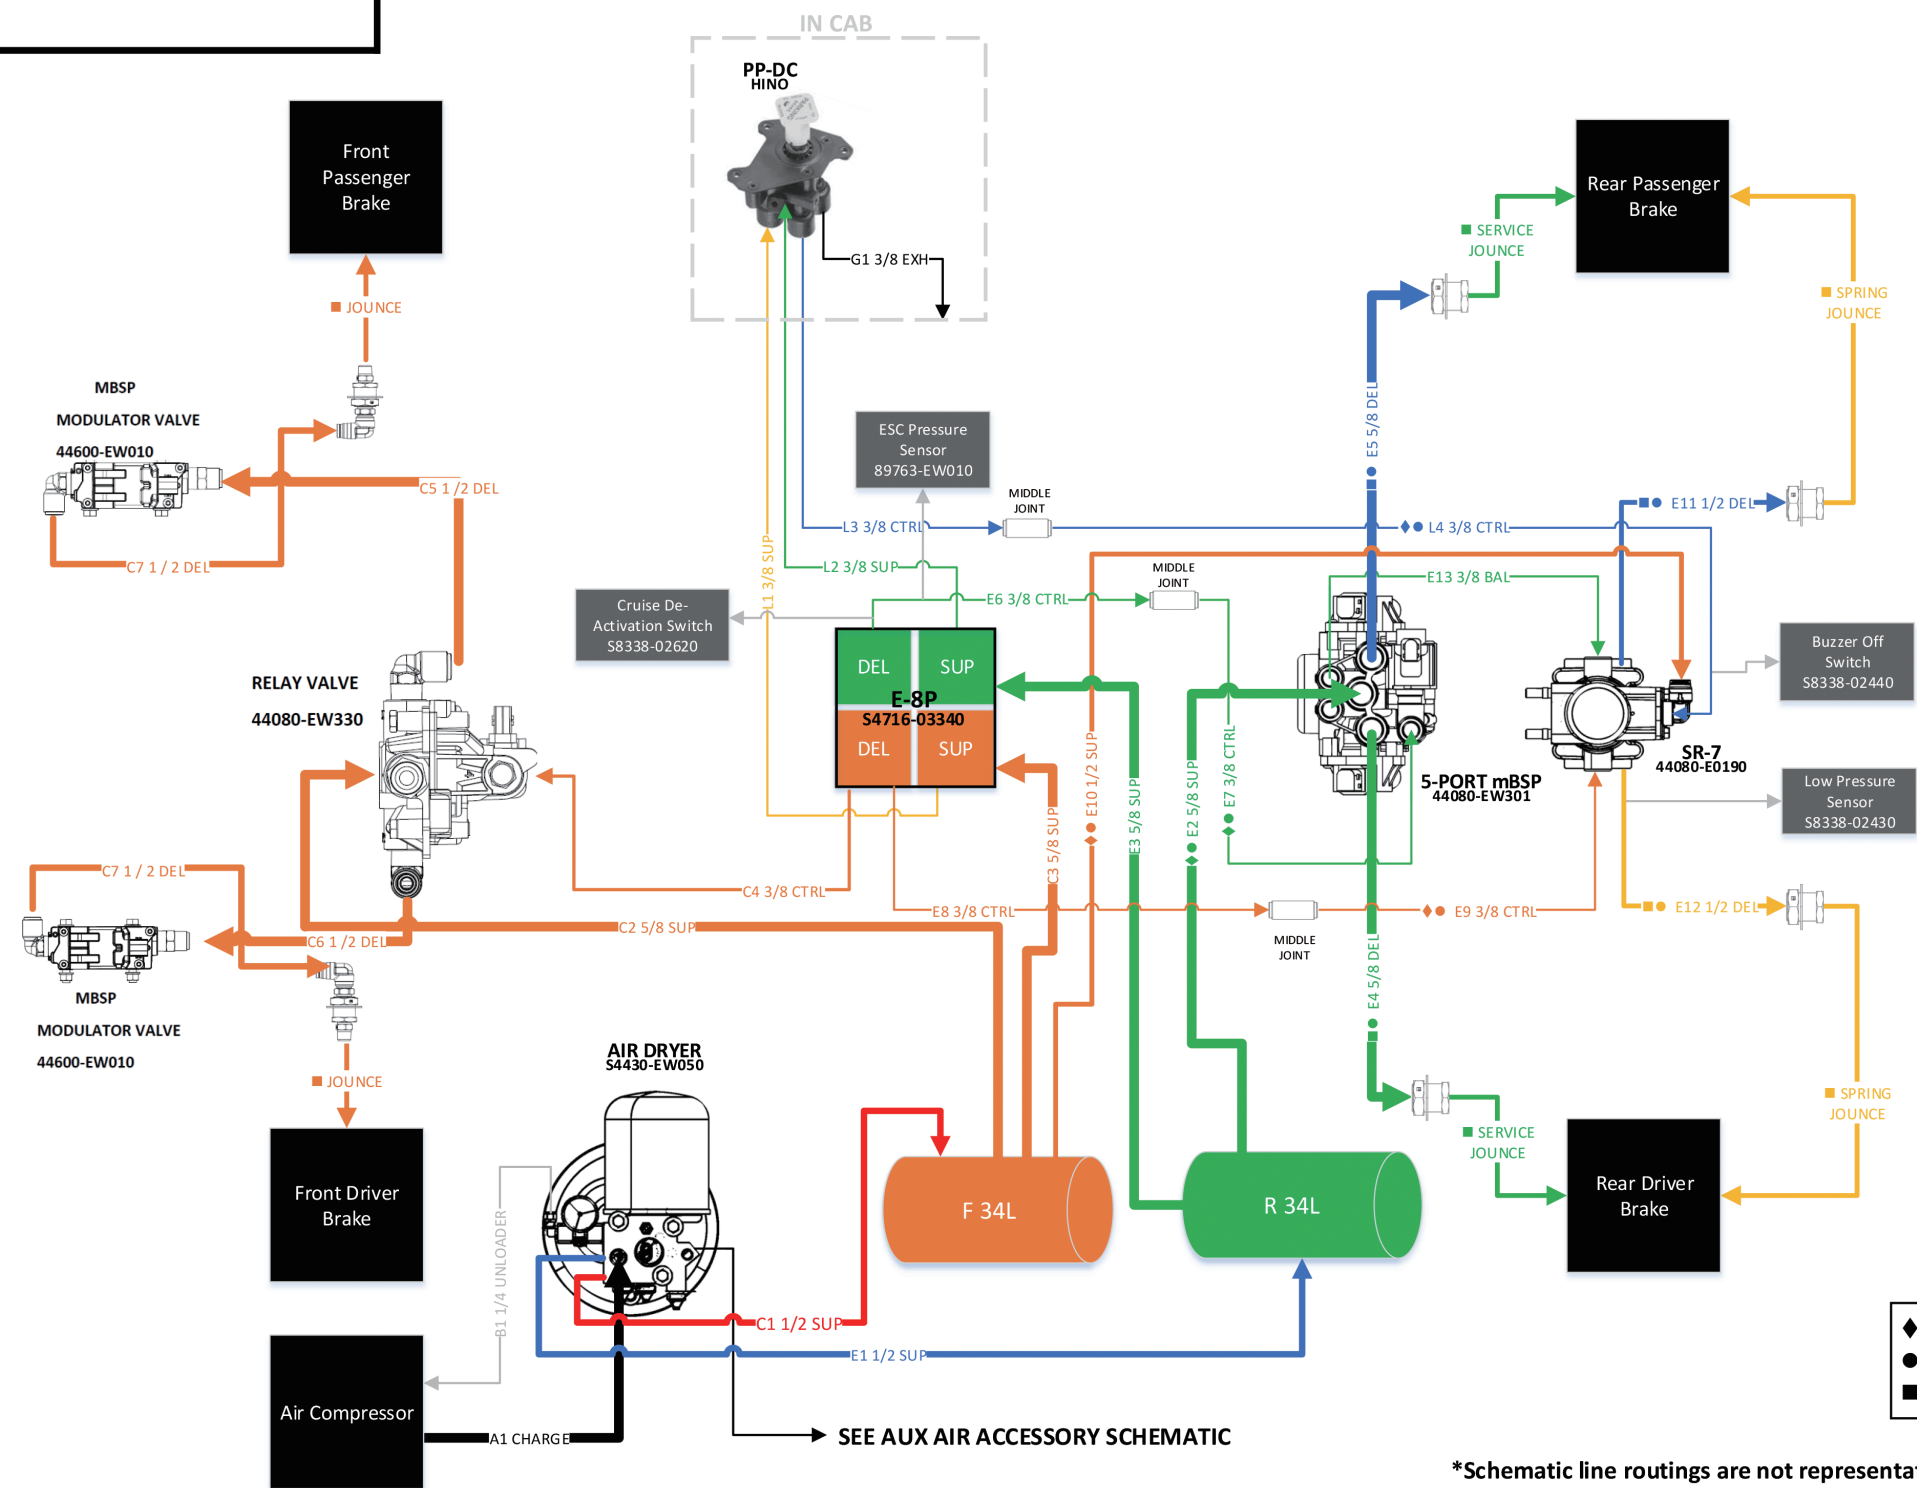


2. BRAKE PIPING DIAGRAM



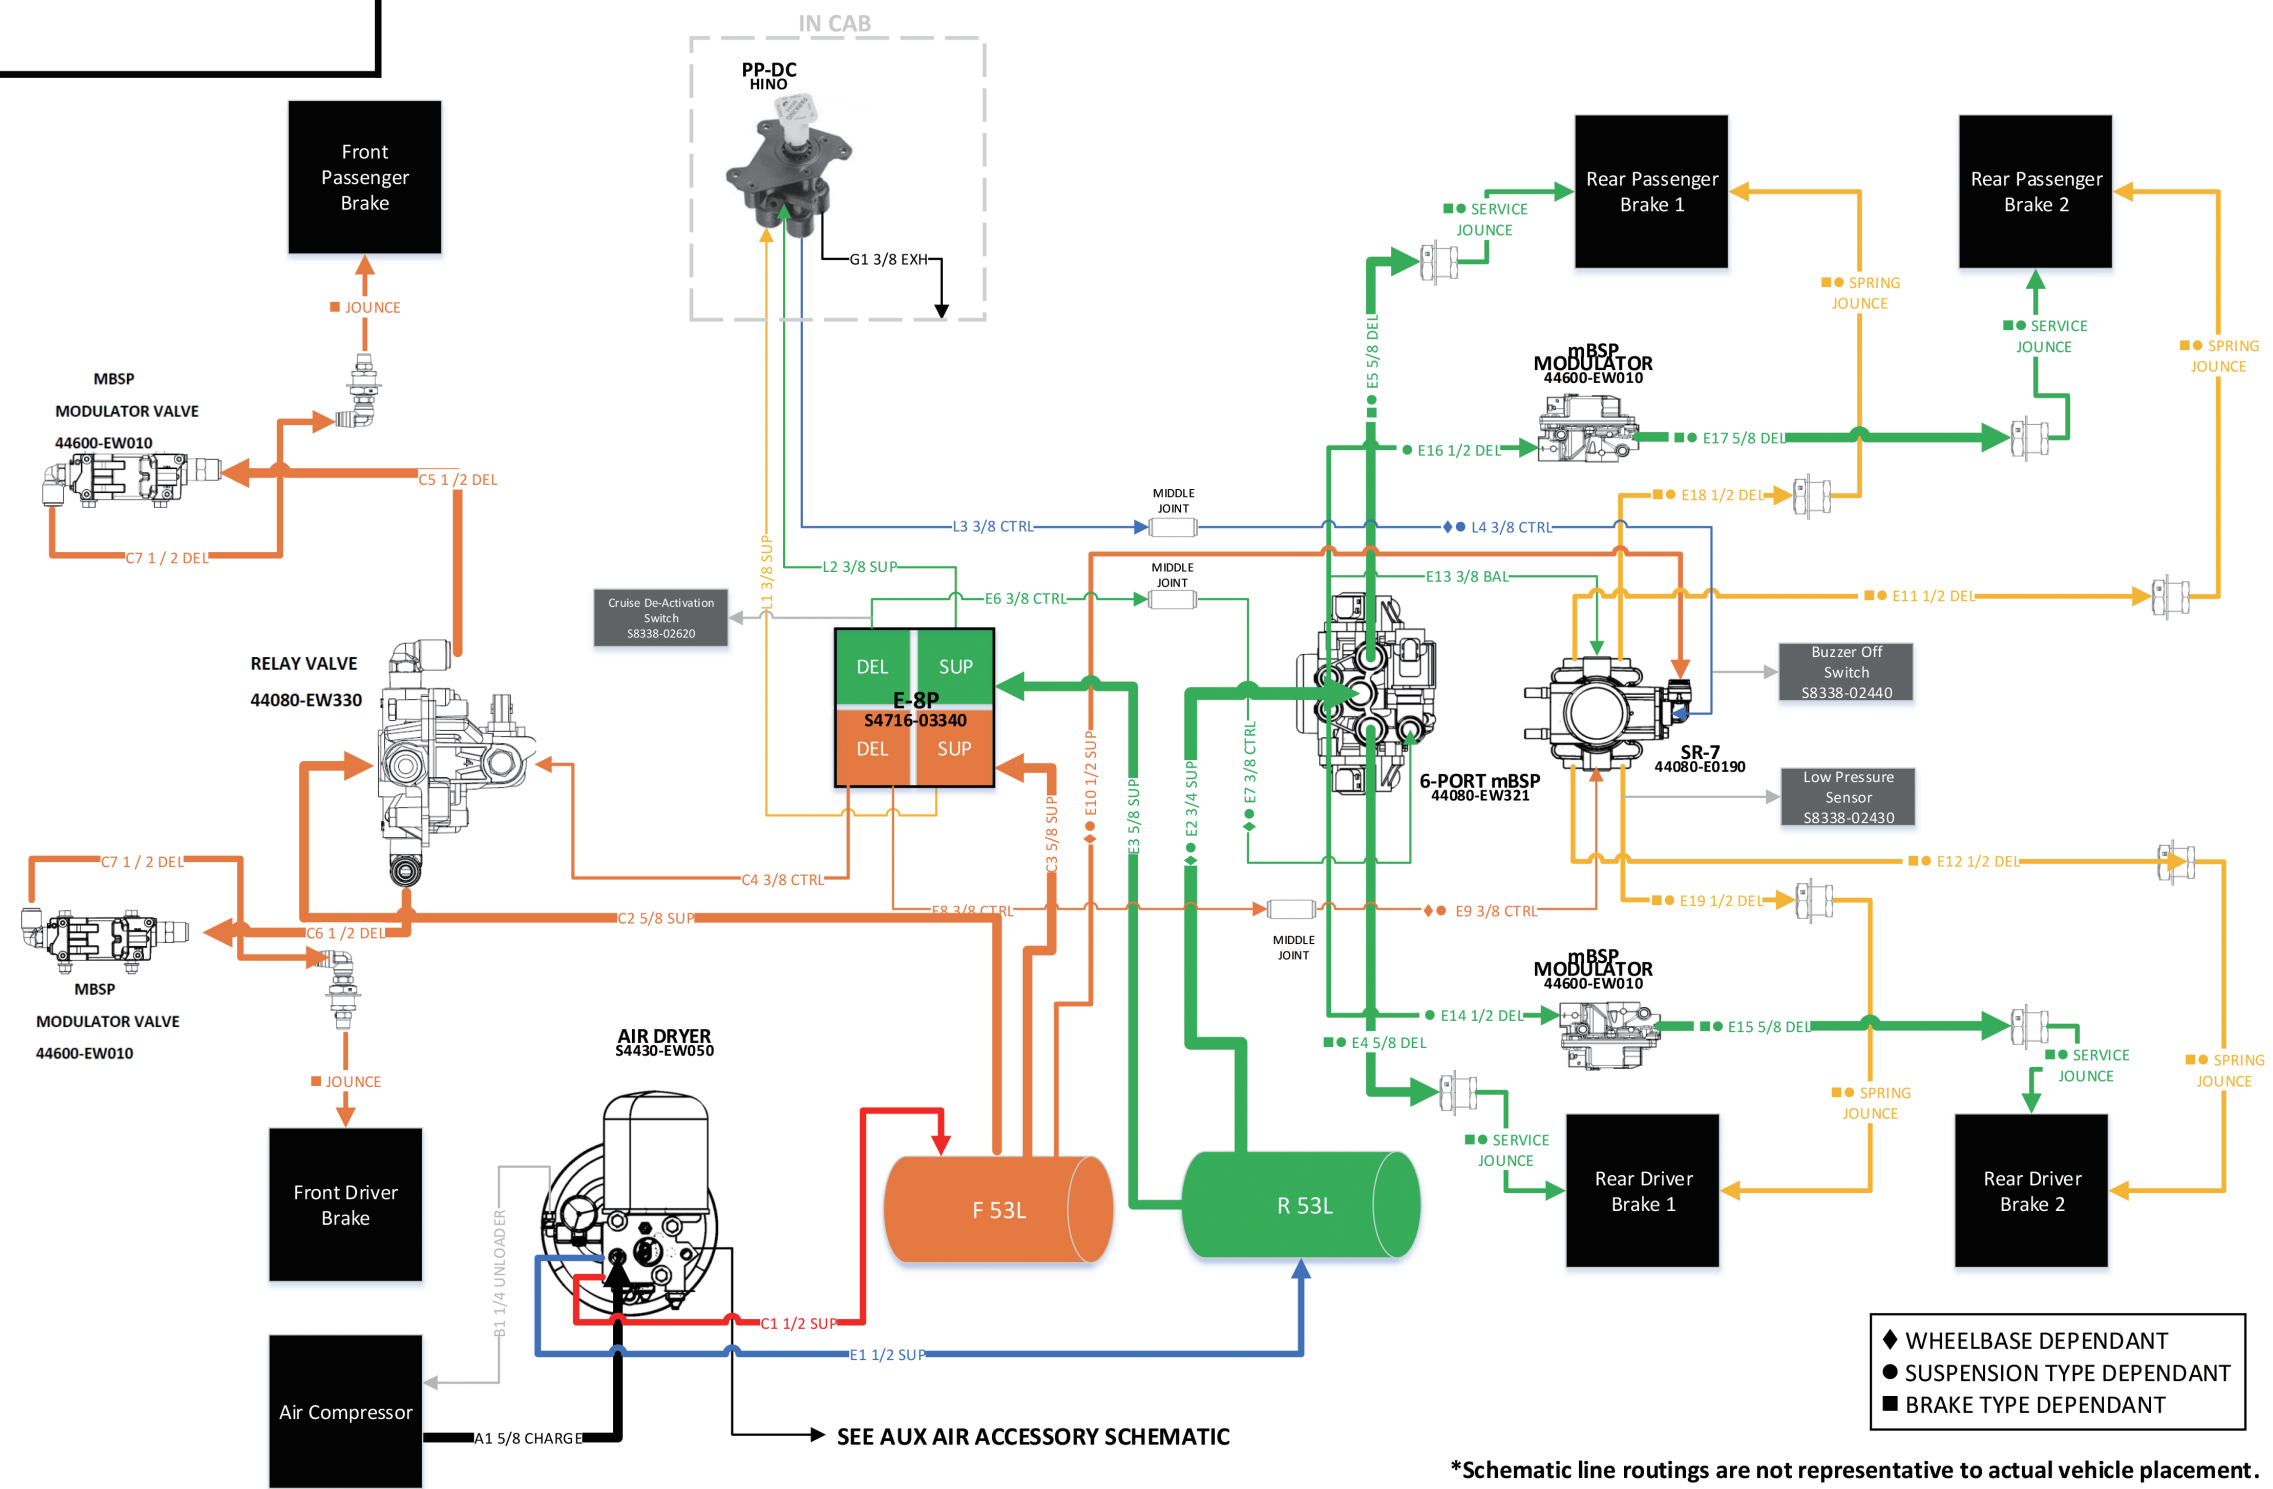
4S/4M  
ABS/TCS/ESC

4X2 TRUCK



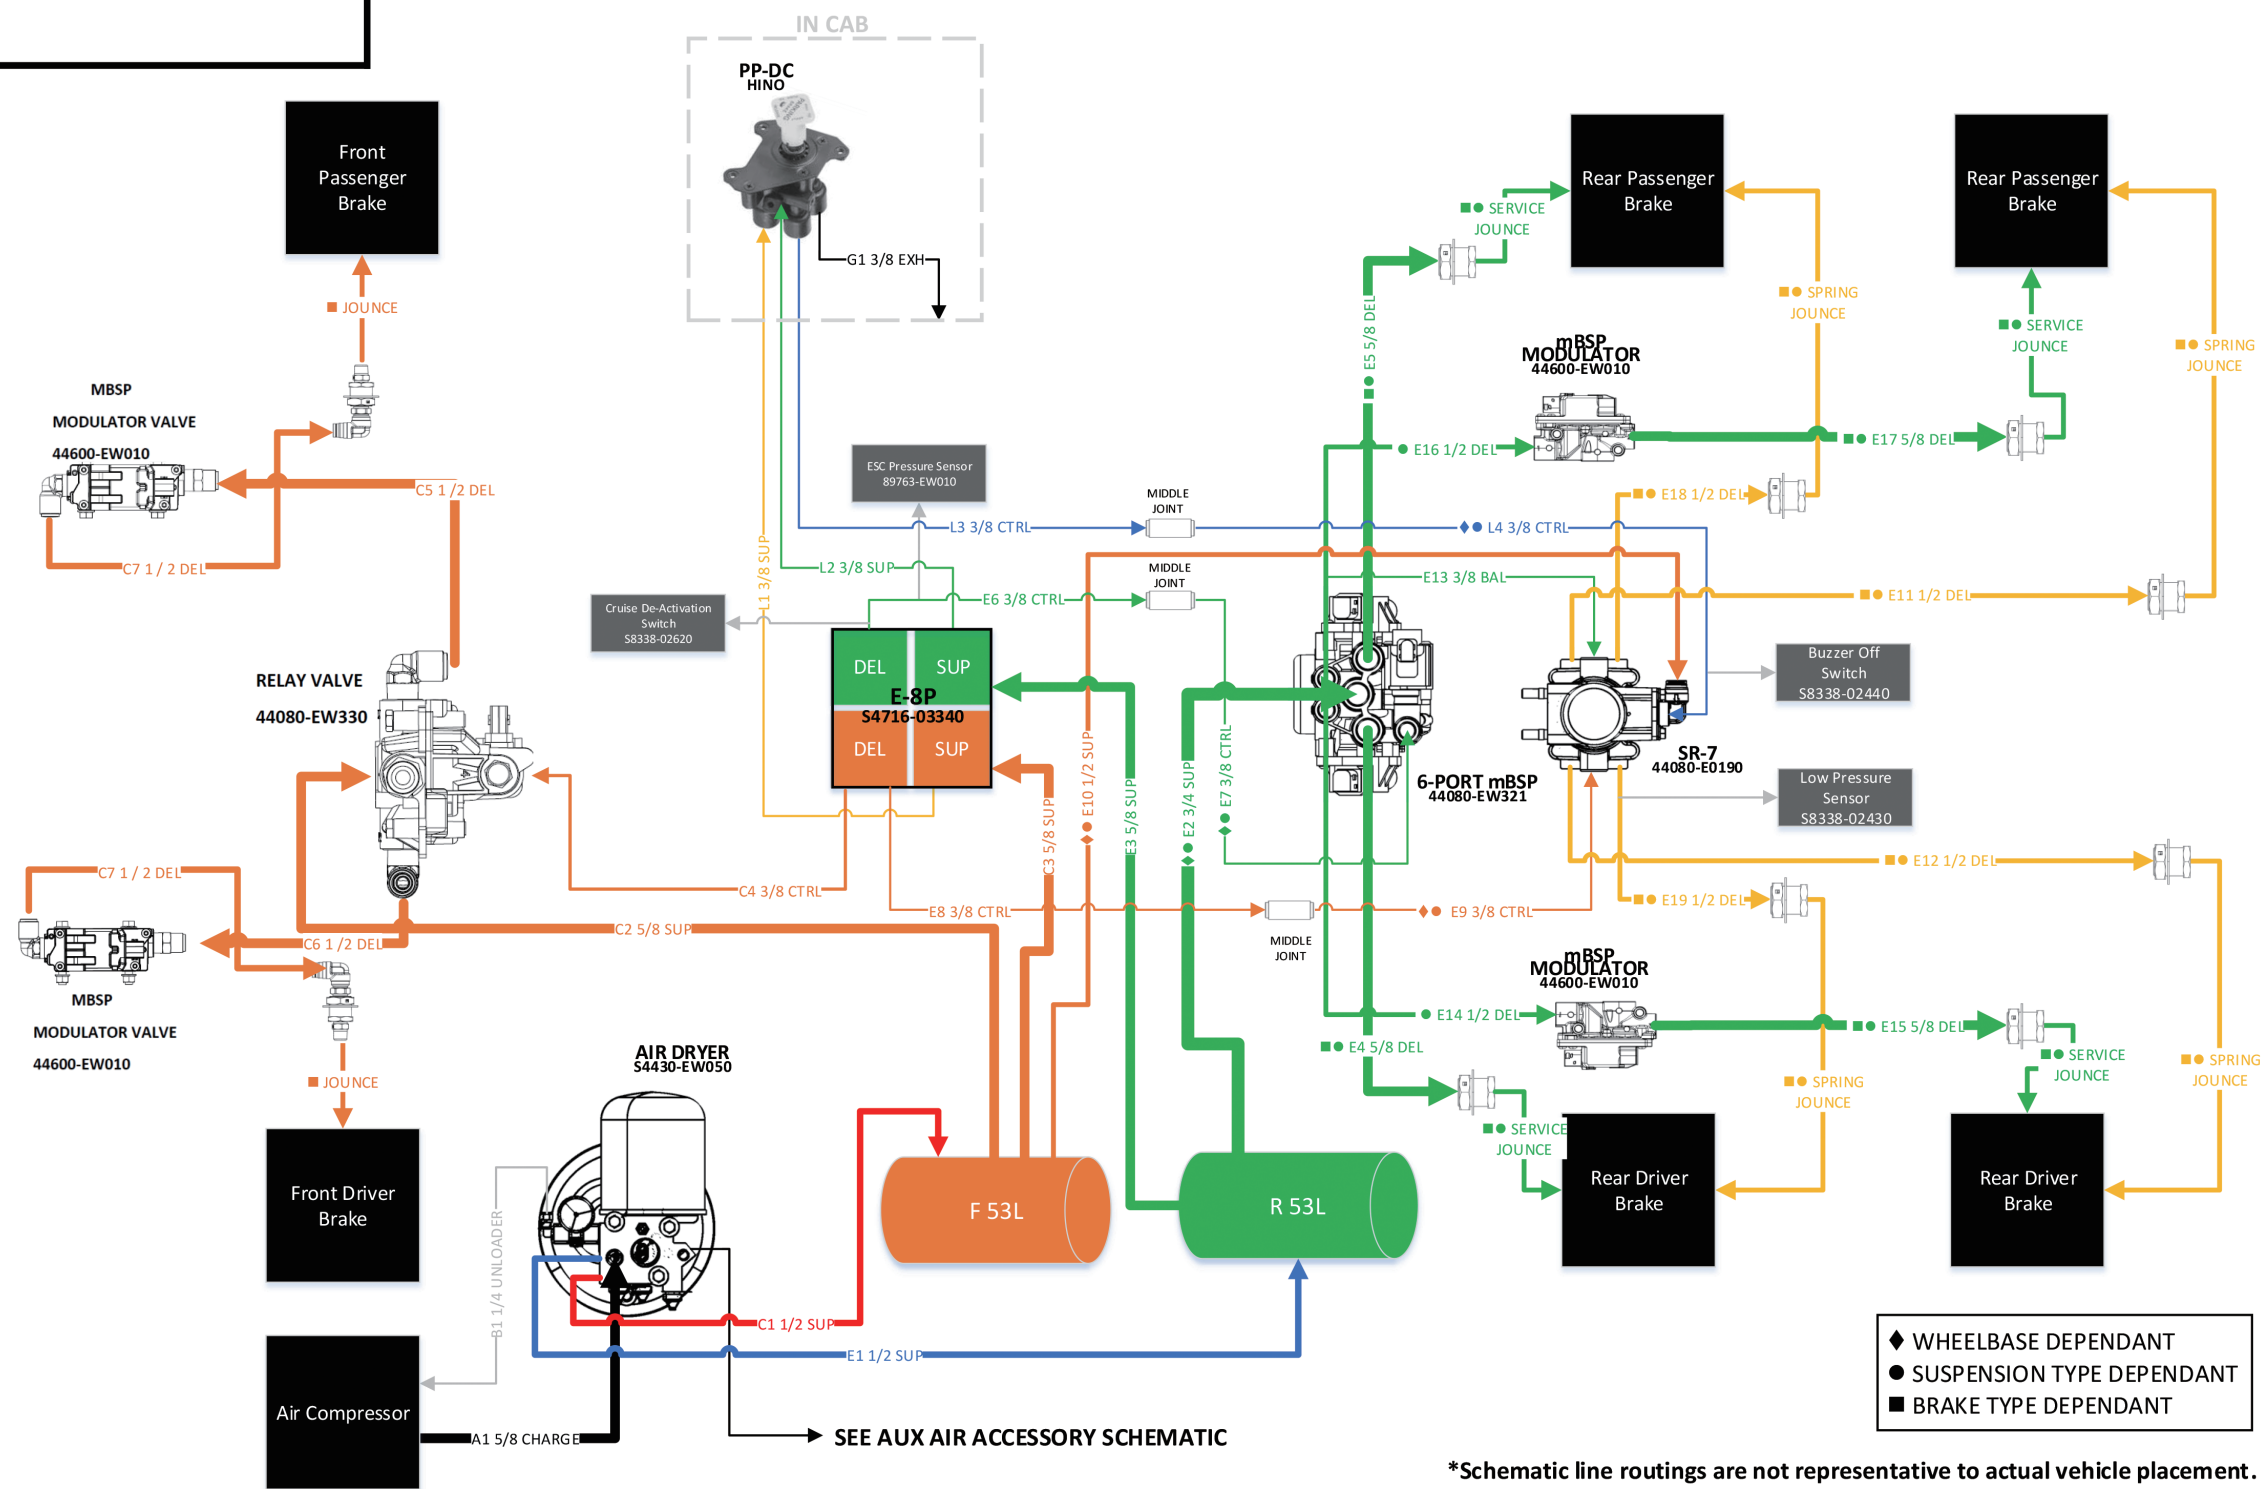
6S/6M  
ABS

6X4 TRUCK

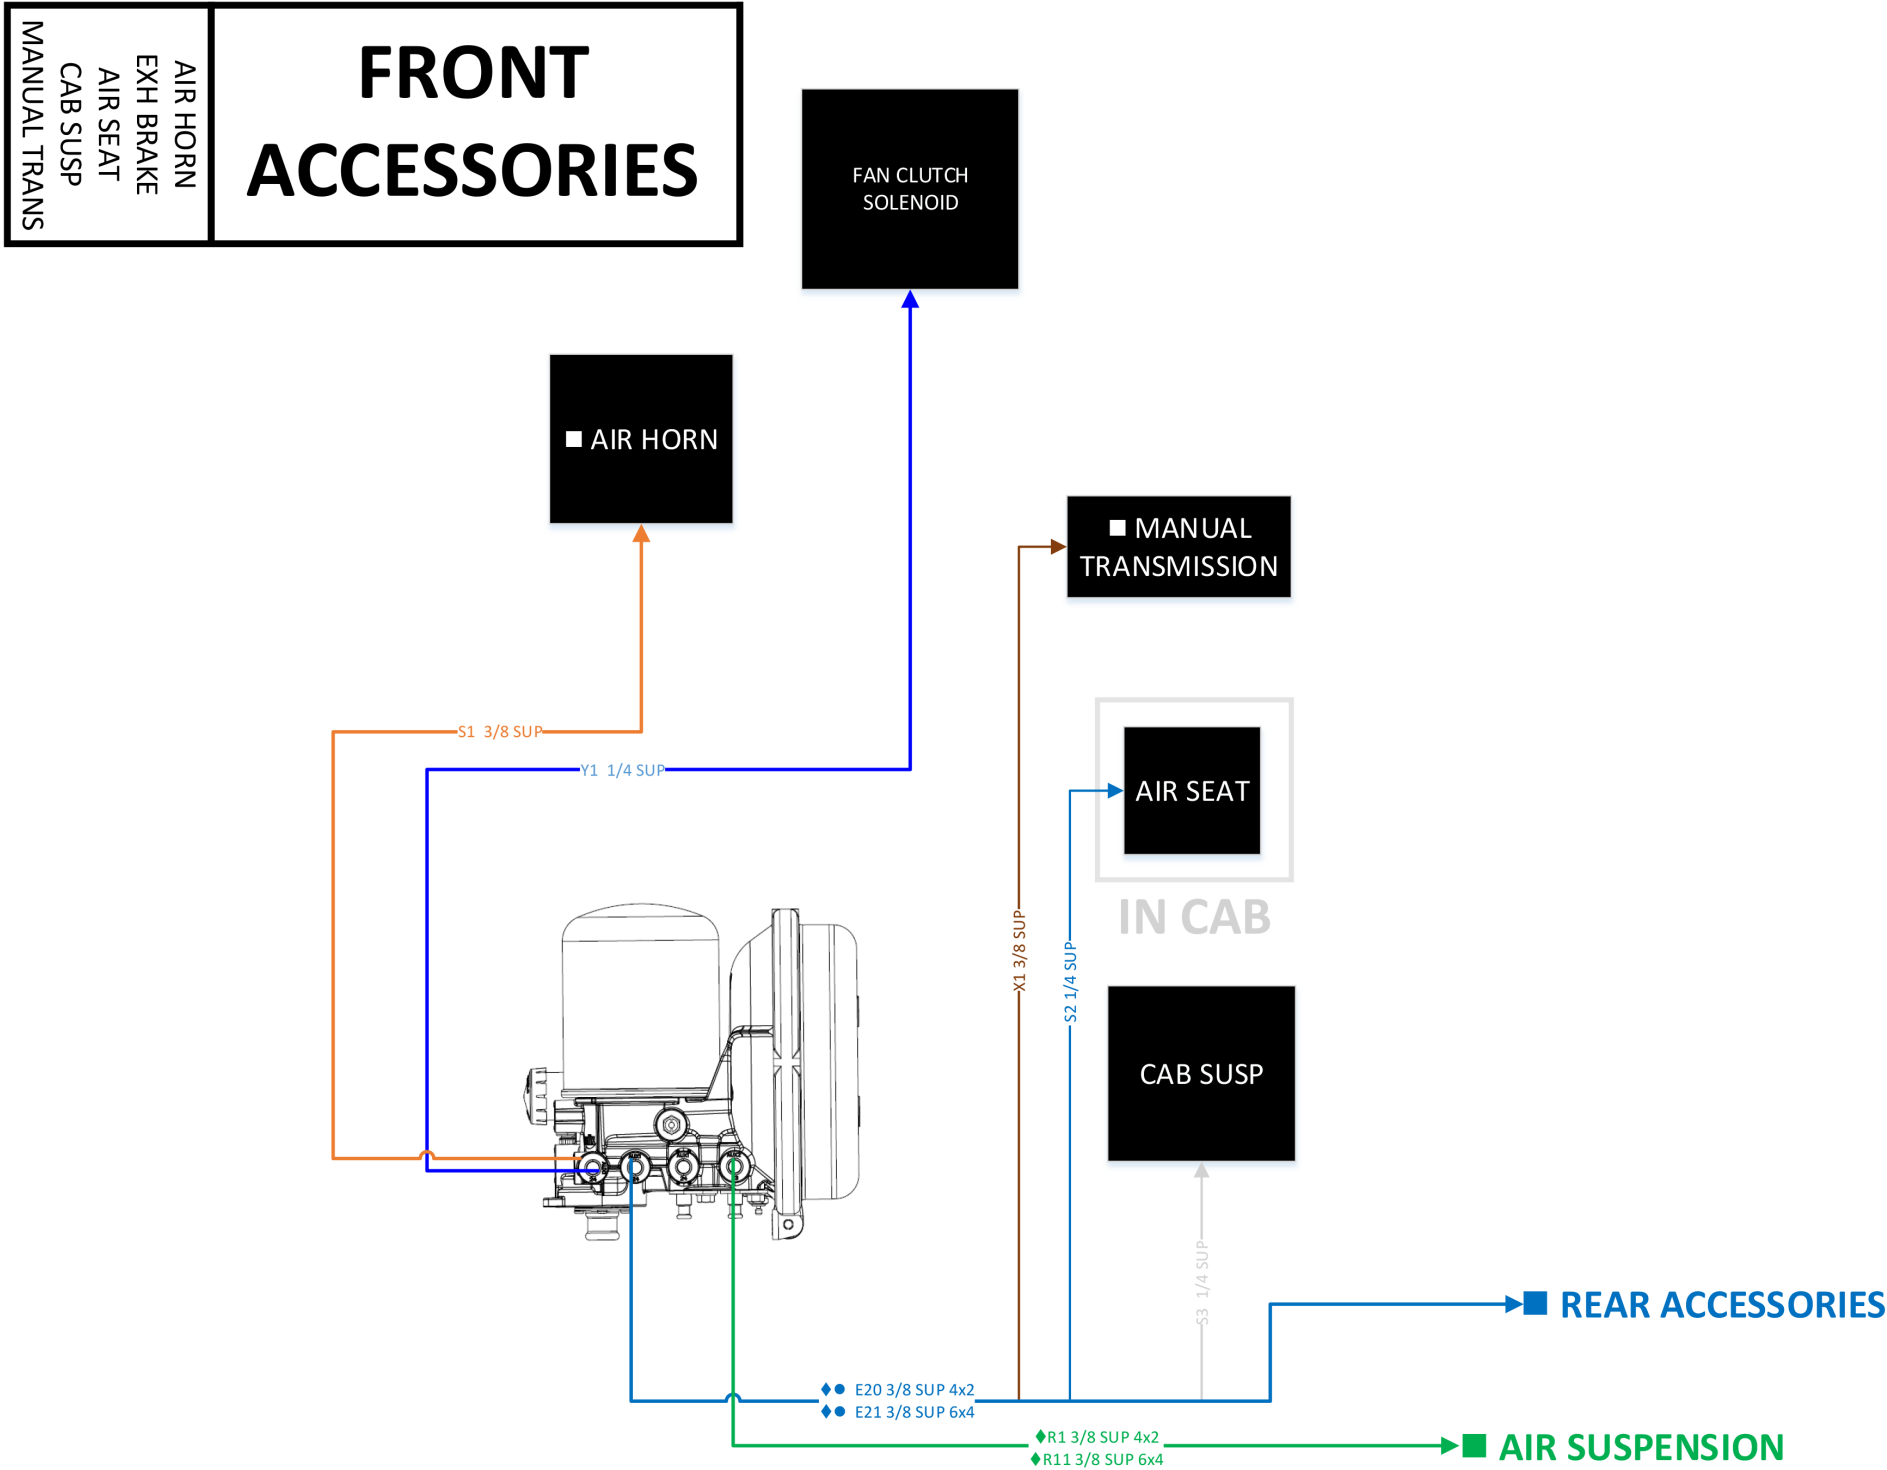


6S/6M  
ABS/TCS/ESC

6X4 TRUCK



3. AUXILIARY AIR LINE

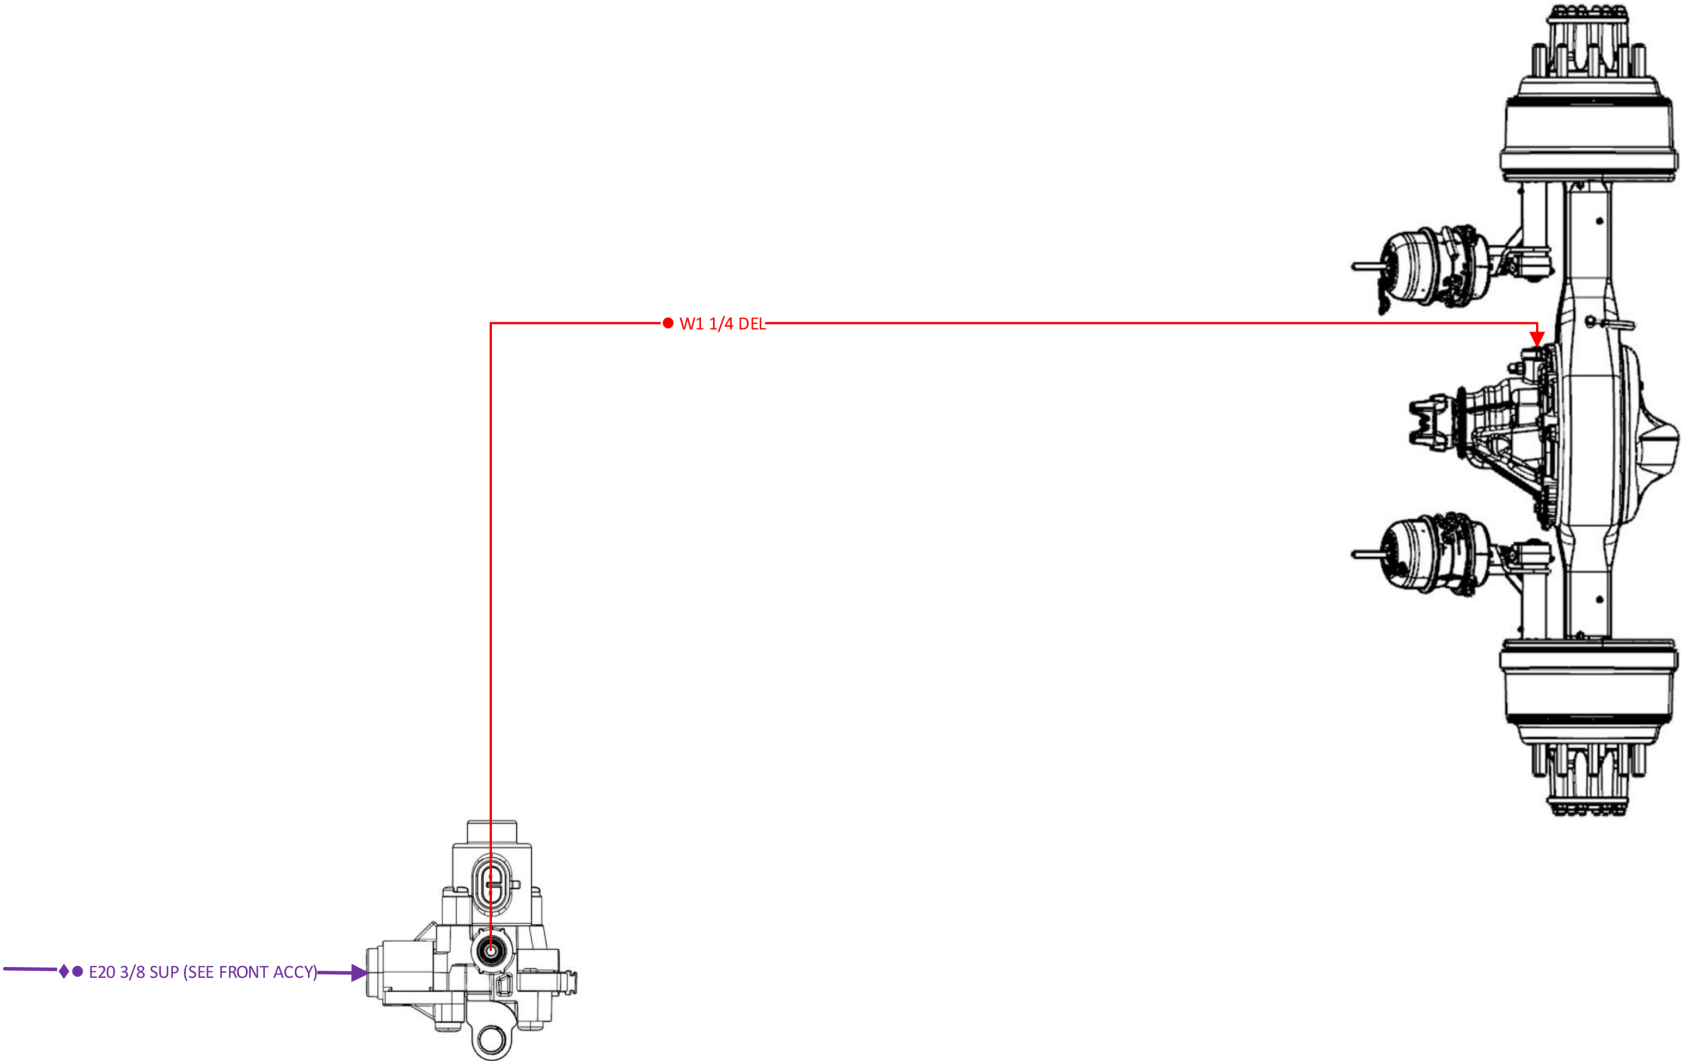


- ◆ WHEELBASE DEPENDANT
- SUSPENSION TYPE DEPENDANT
- OPTIONAL EQUIPMENT

\*Schematic line routings are not representative to actual vehicle placement.

LOCKING DIFF

4X2 REAR  
ACCESSORIES



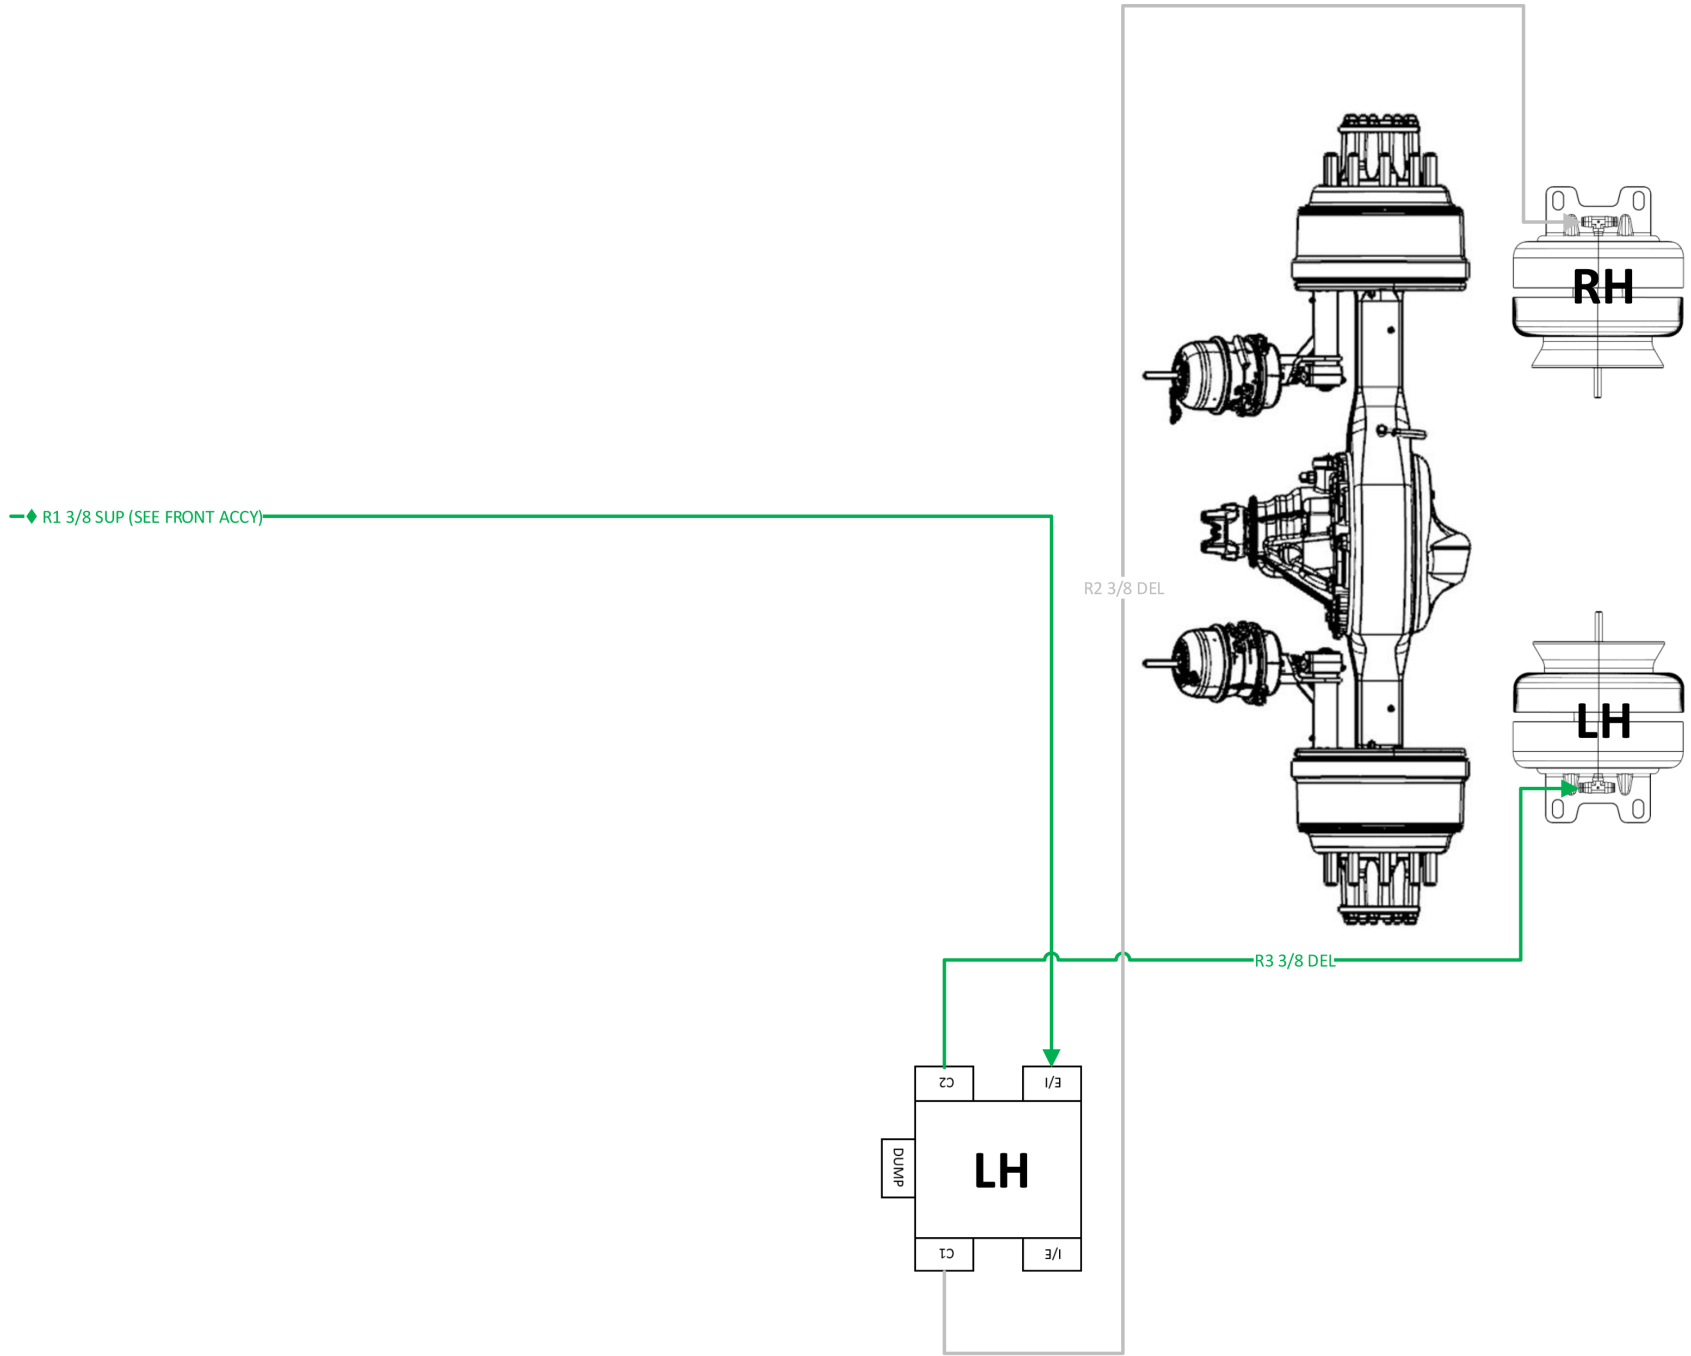
- ◆ WHEELBASE DEPENDANT
- SUSPENSION TYPE DEPENDANT

\*Schematic line routings are not representative to actual vehicle placement.



AIR SUSP  
(SINGLE LEVEL)

4X2 REAR  
ACCESSORIES

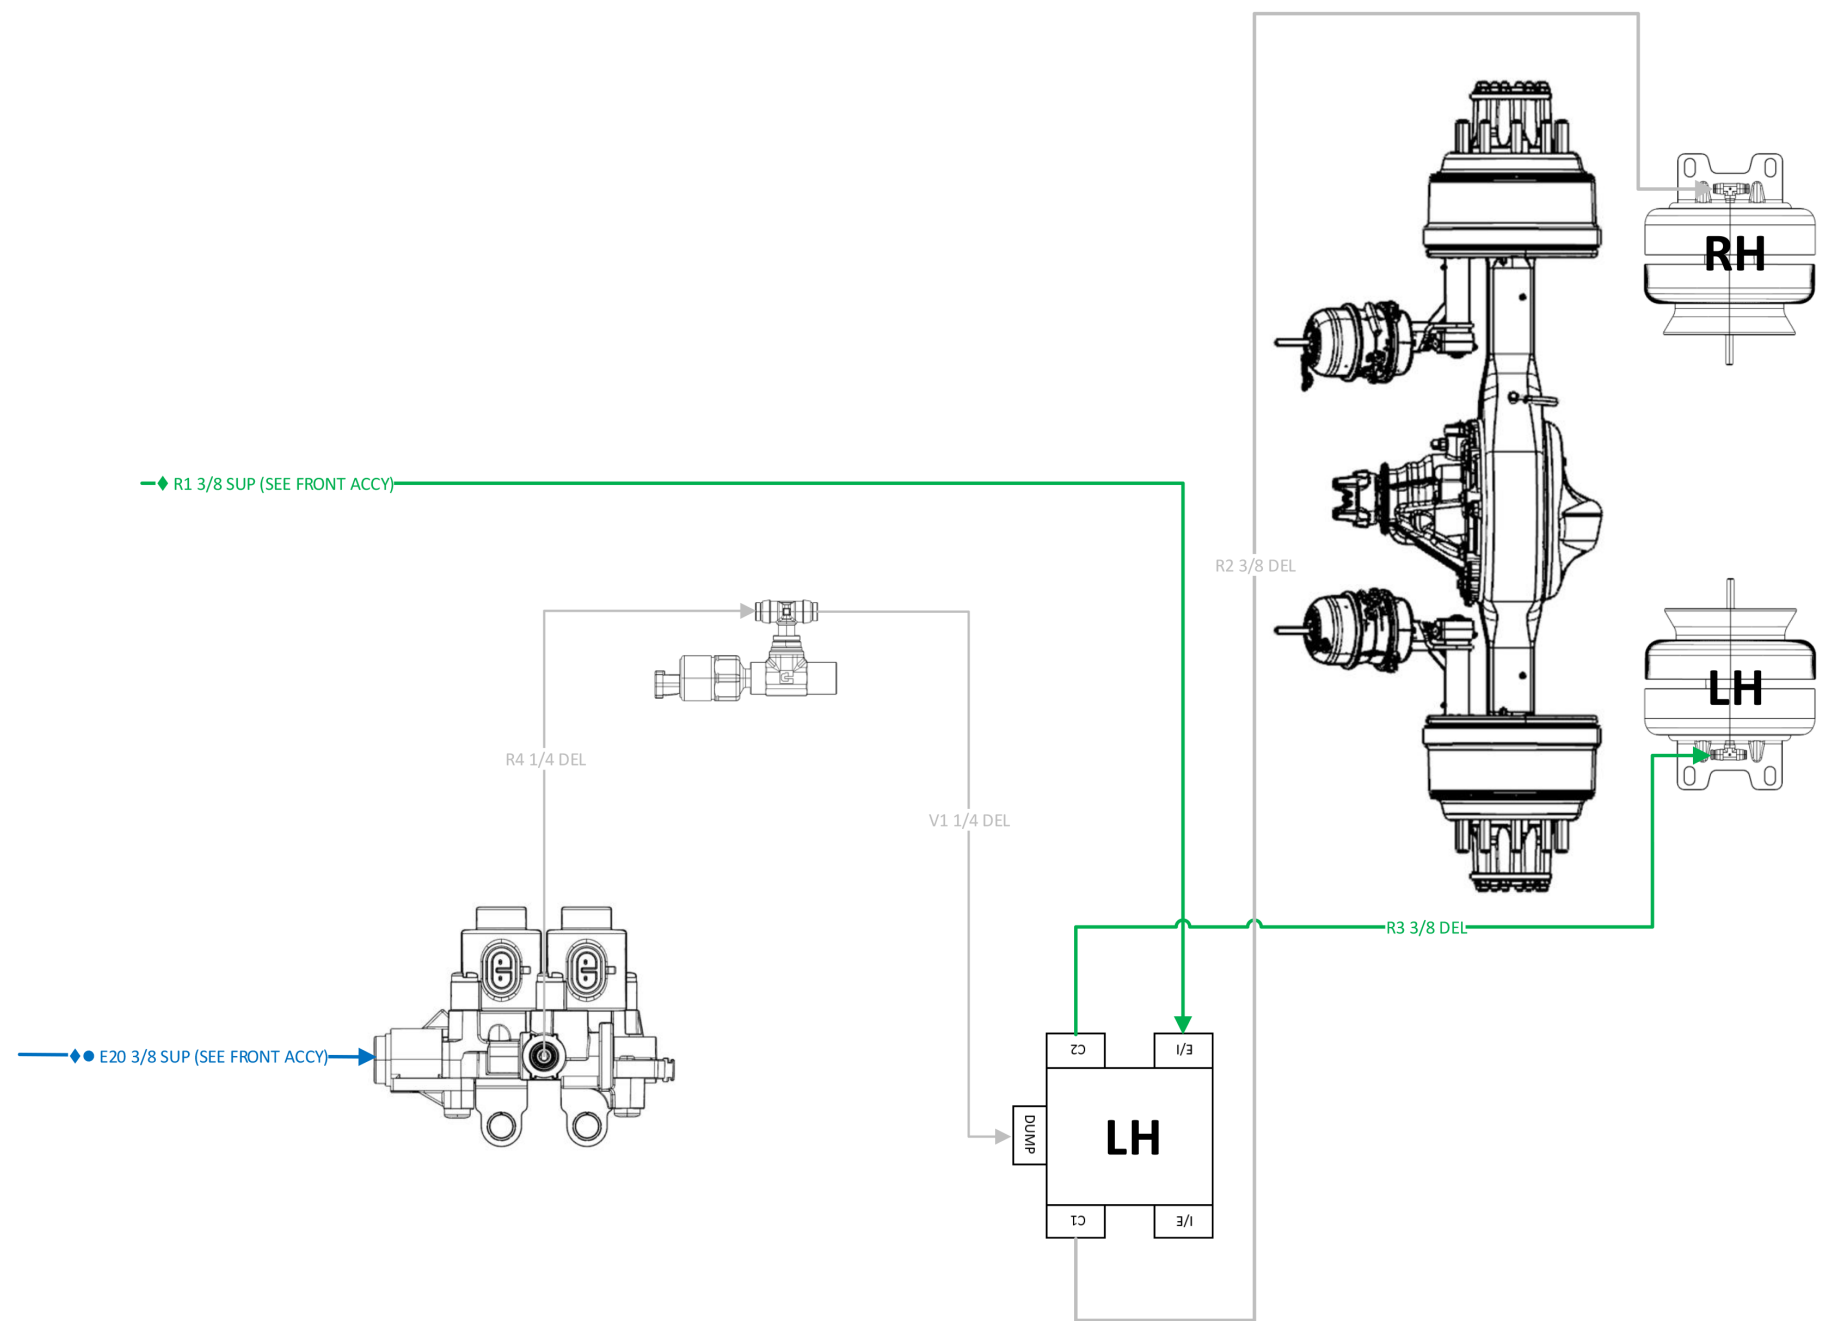


- ◆ WHEELBASE DEPENDANT
- SUSPENSION TYPE DEPENDANT

\*Schematic line routings are not representative to actual vehicle placement.

AIR SUSP  
(SINGLE LEVEL  
W/DUMP)

4X2 REAR  
ACCESSORIES

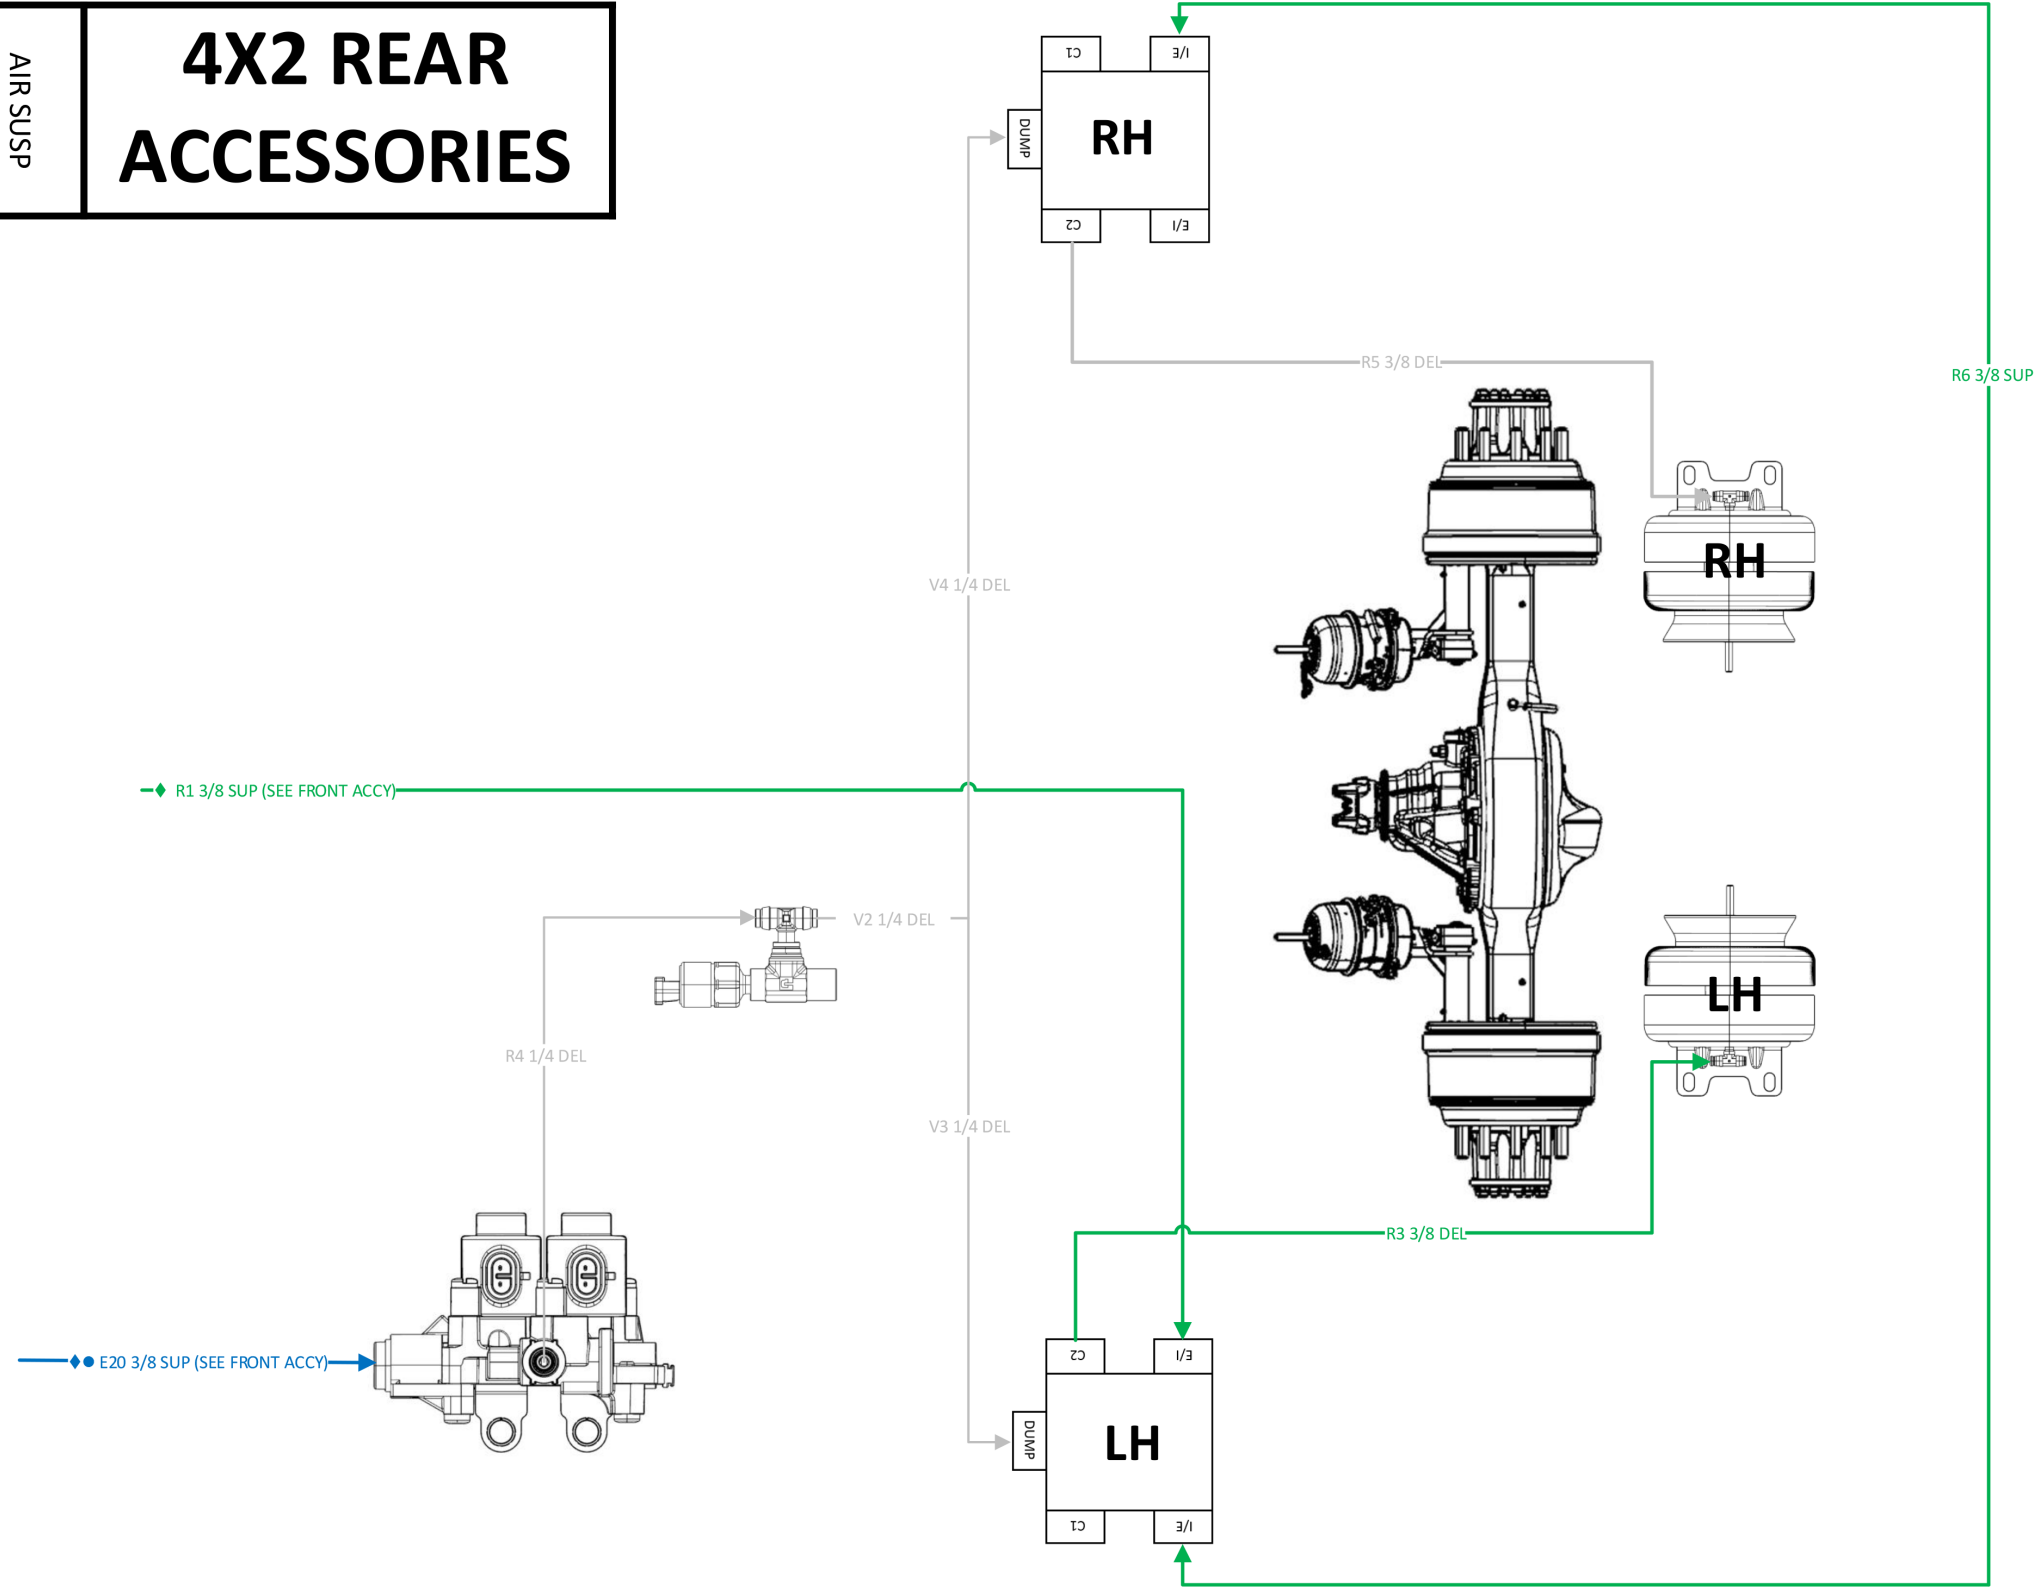


◆ WHEELBASE DEPENDANT  
● SUSPENSION TYPE DEPENDANT

\*Schematic line routings are not representative to actual vehicle placement.

AIR SUSP  
(DUAL LEVEL  
W/DUMP)

4X2 REAR  
ACCESSORIES

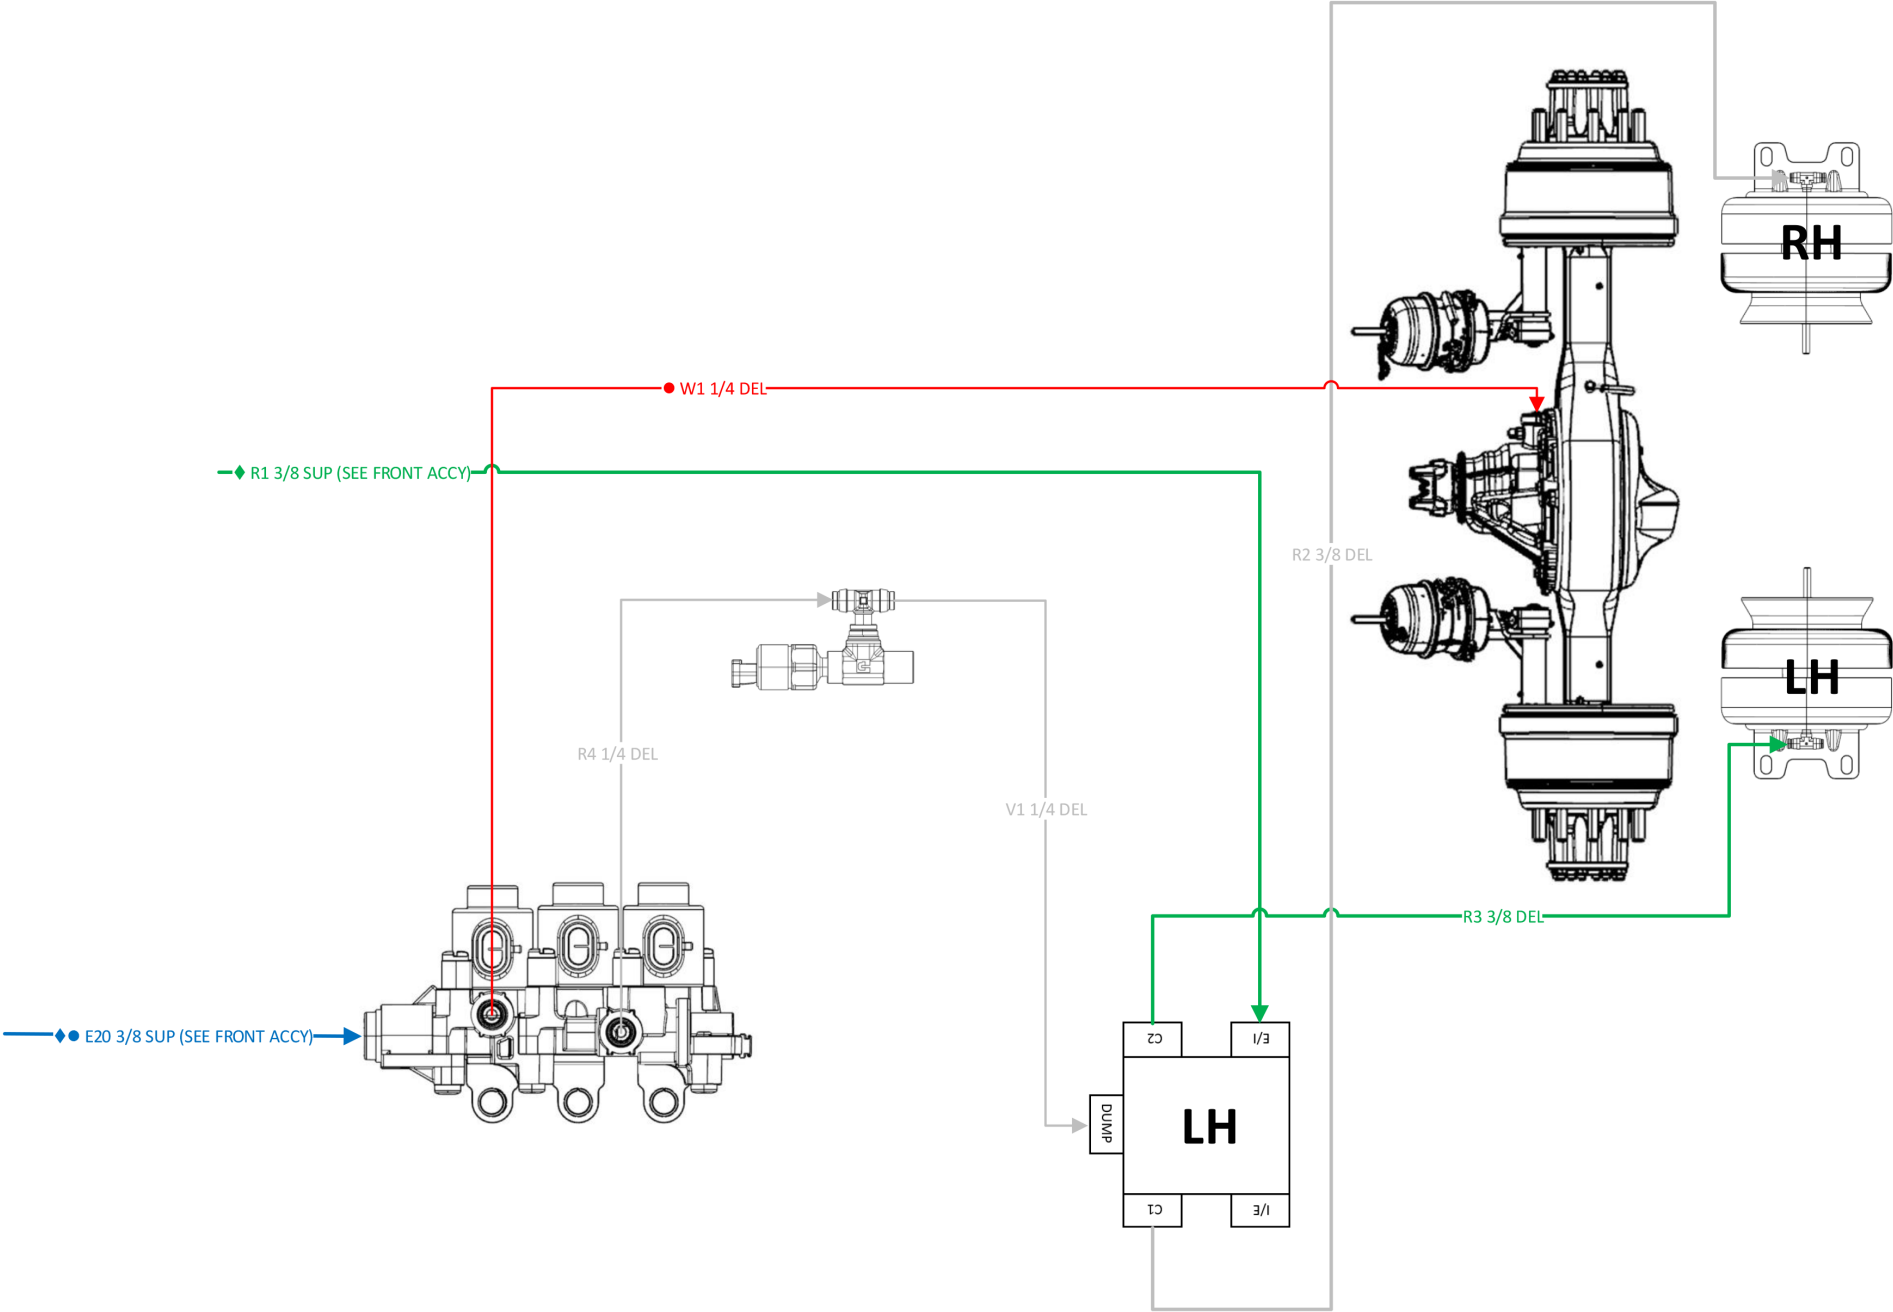


◆ WHEELBASE PENDANT  
● SUSPENSION TYPE PENDANT

\*Schematic line routings are not representative to actual vehicle placement.

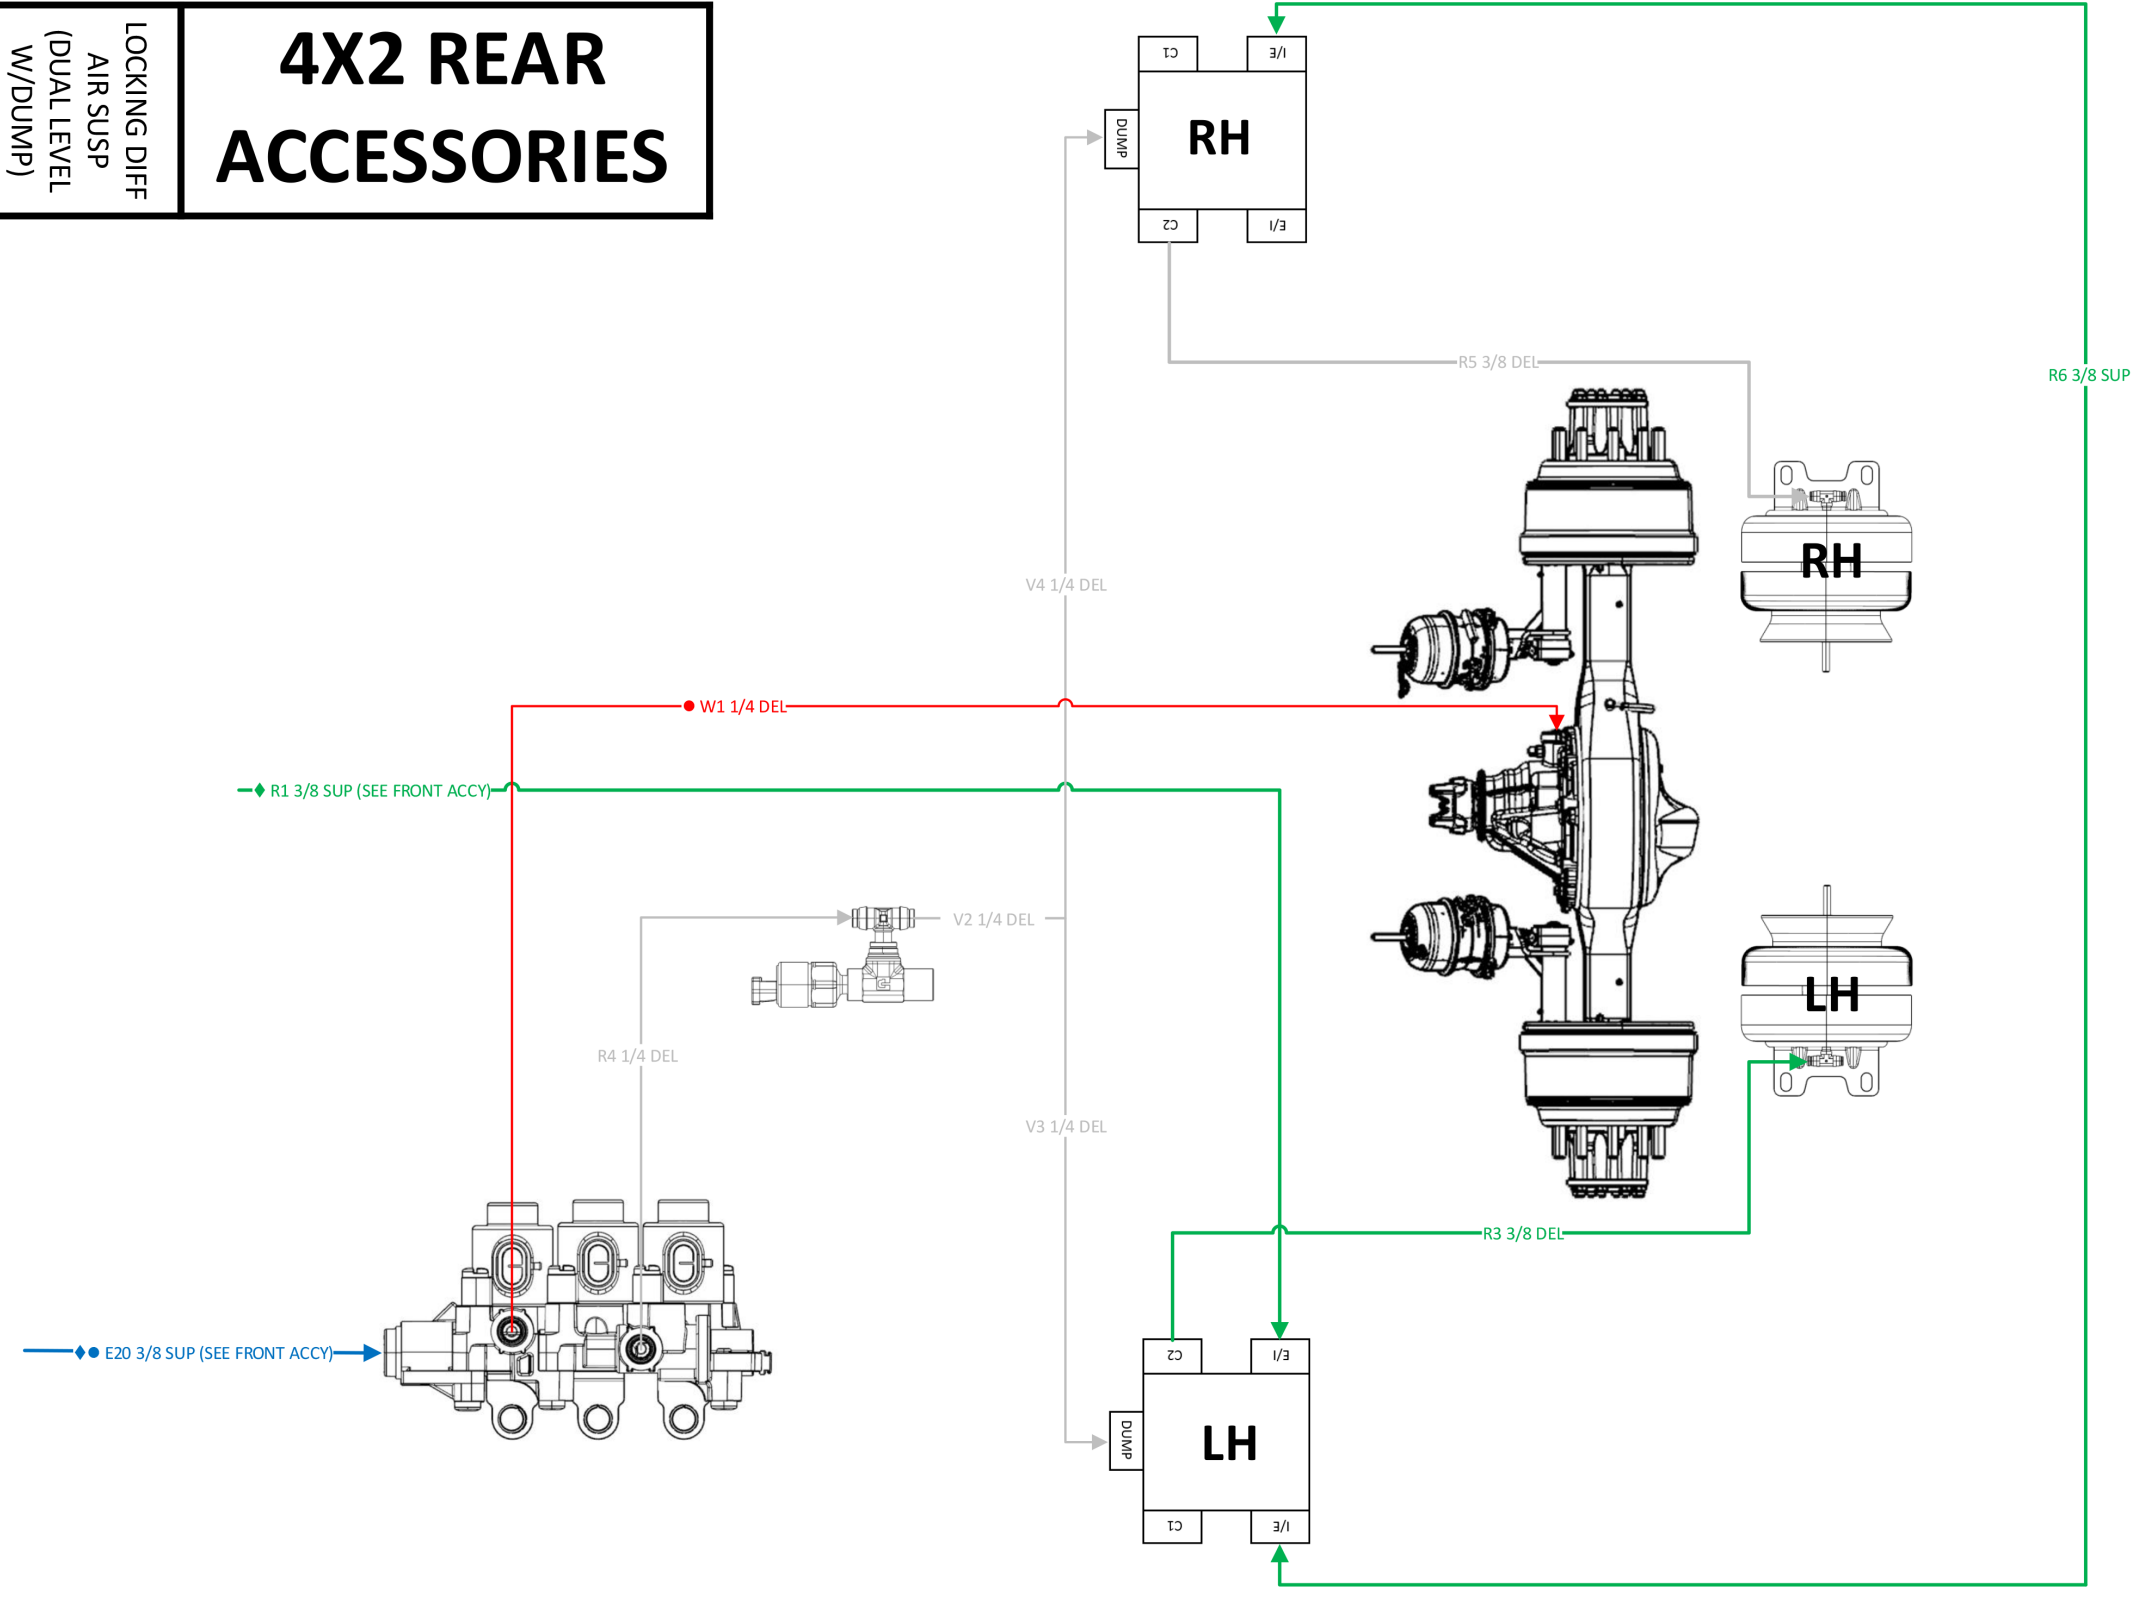
LOCKING DIFF  
AIR SUSP  
(SINGLE LEVEL  
W/DUMP)

4X2 REAR  
ACCESSORIES



◆ WHEELBASE DEPENDANT  
● SUSPENSION TYPE DEPENDANT

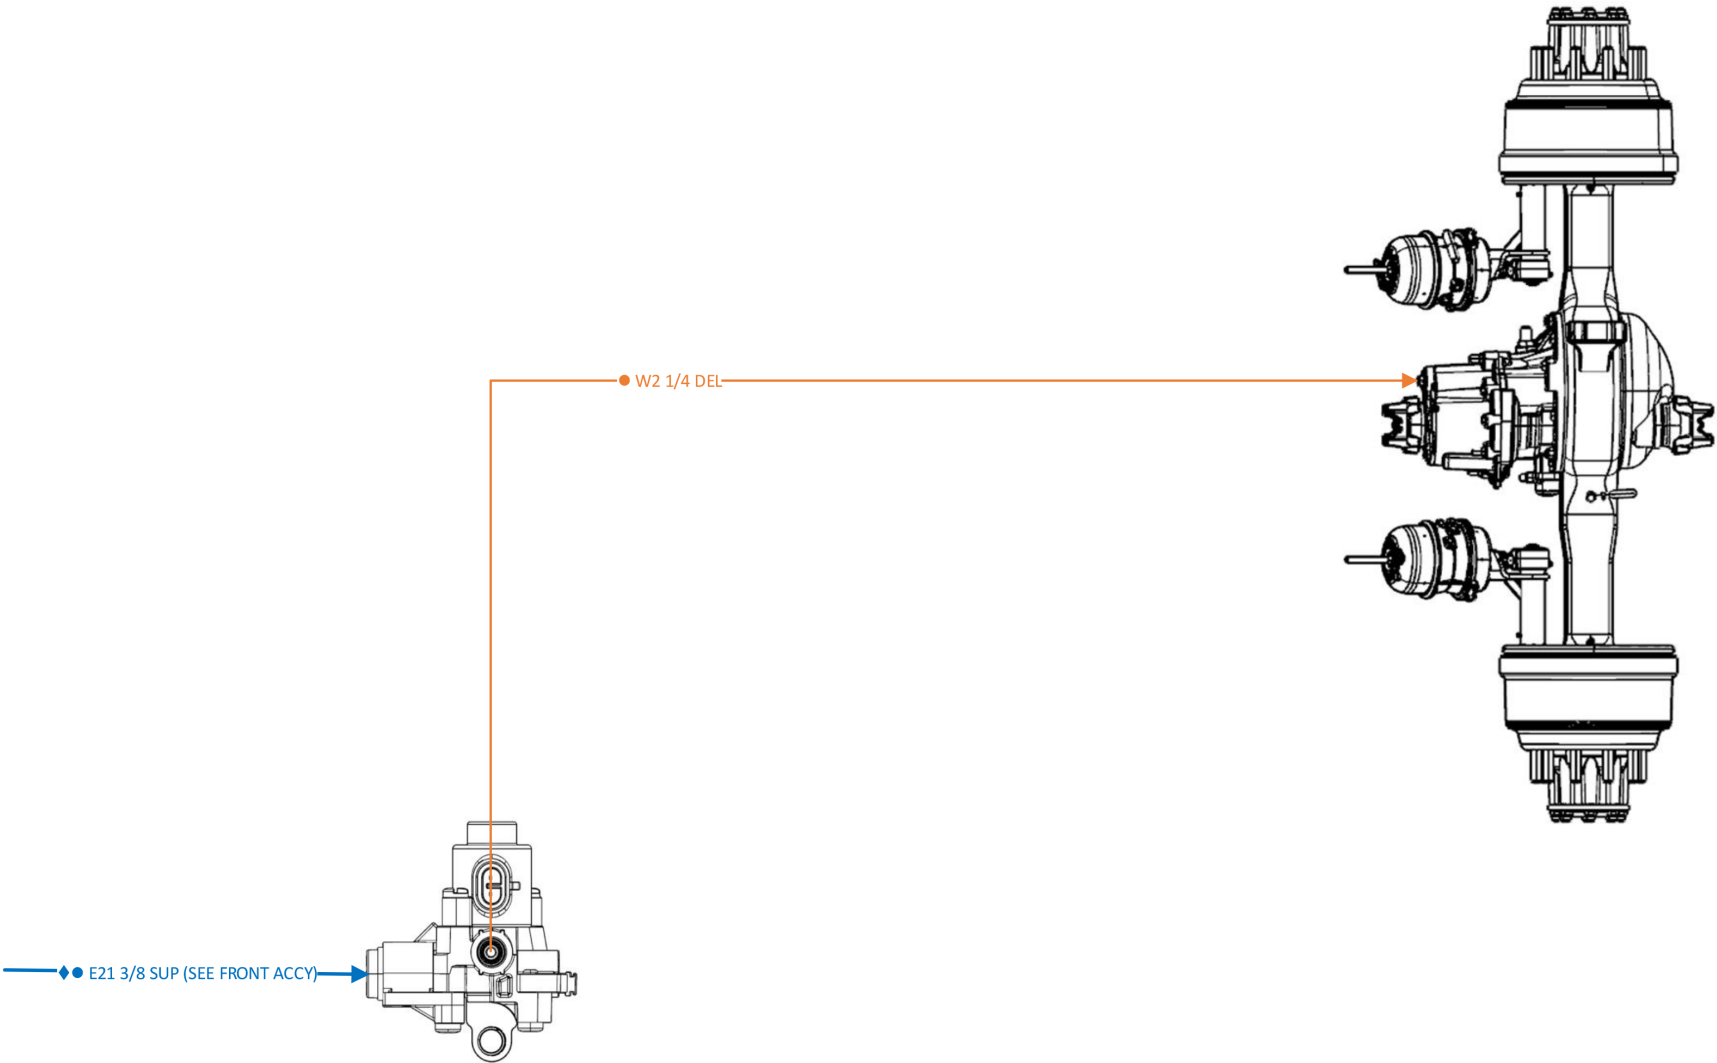
\*Schematic line routings are not representative to actual vehicle placement.



\*Schematic line routings are not representative to actual vehicle placement.

PWR DIV

6X4 REAR  
ACCESSORIES

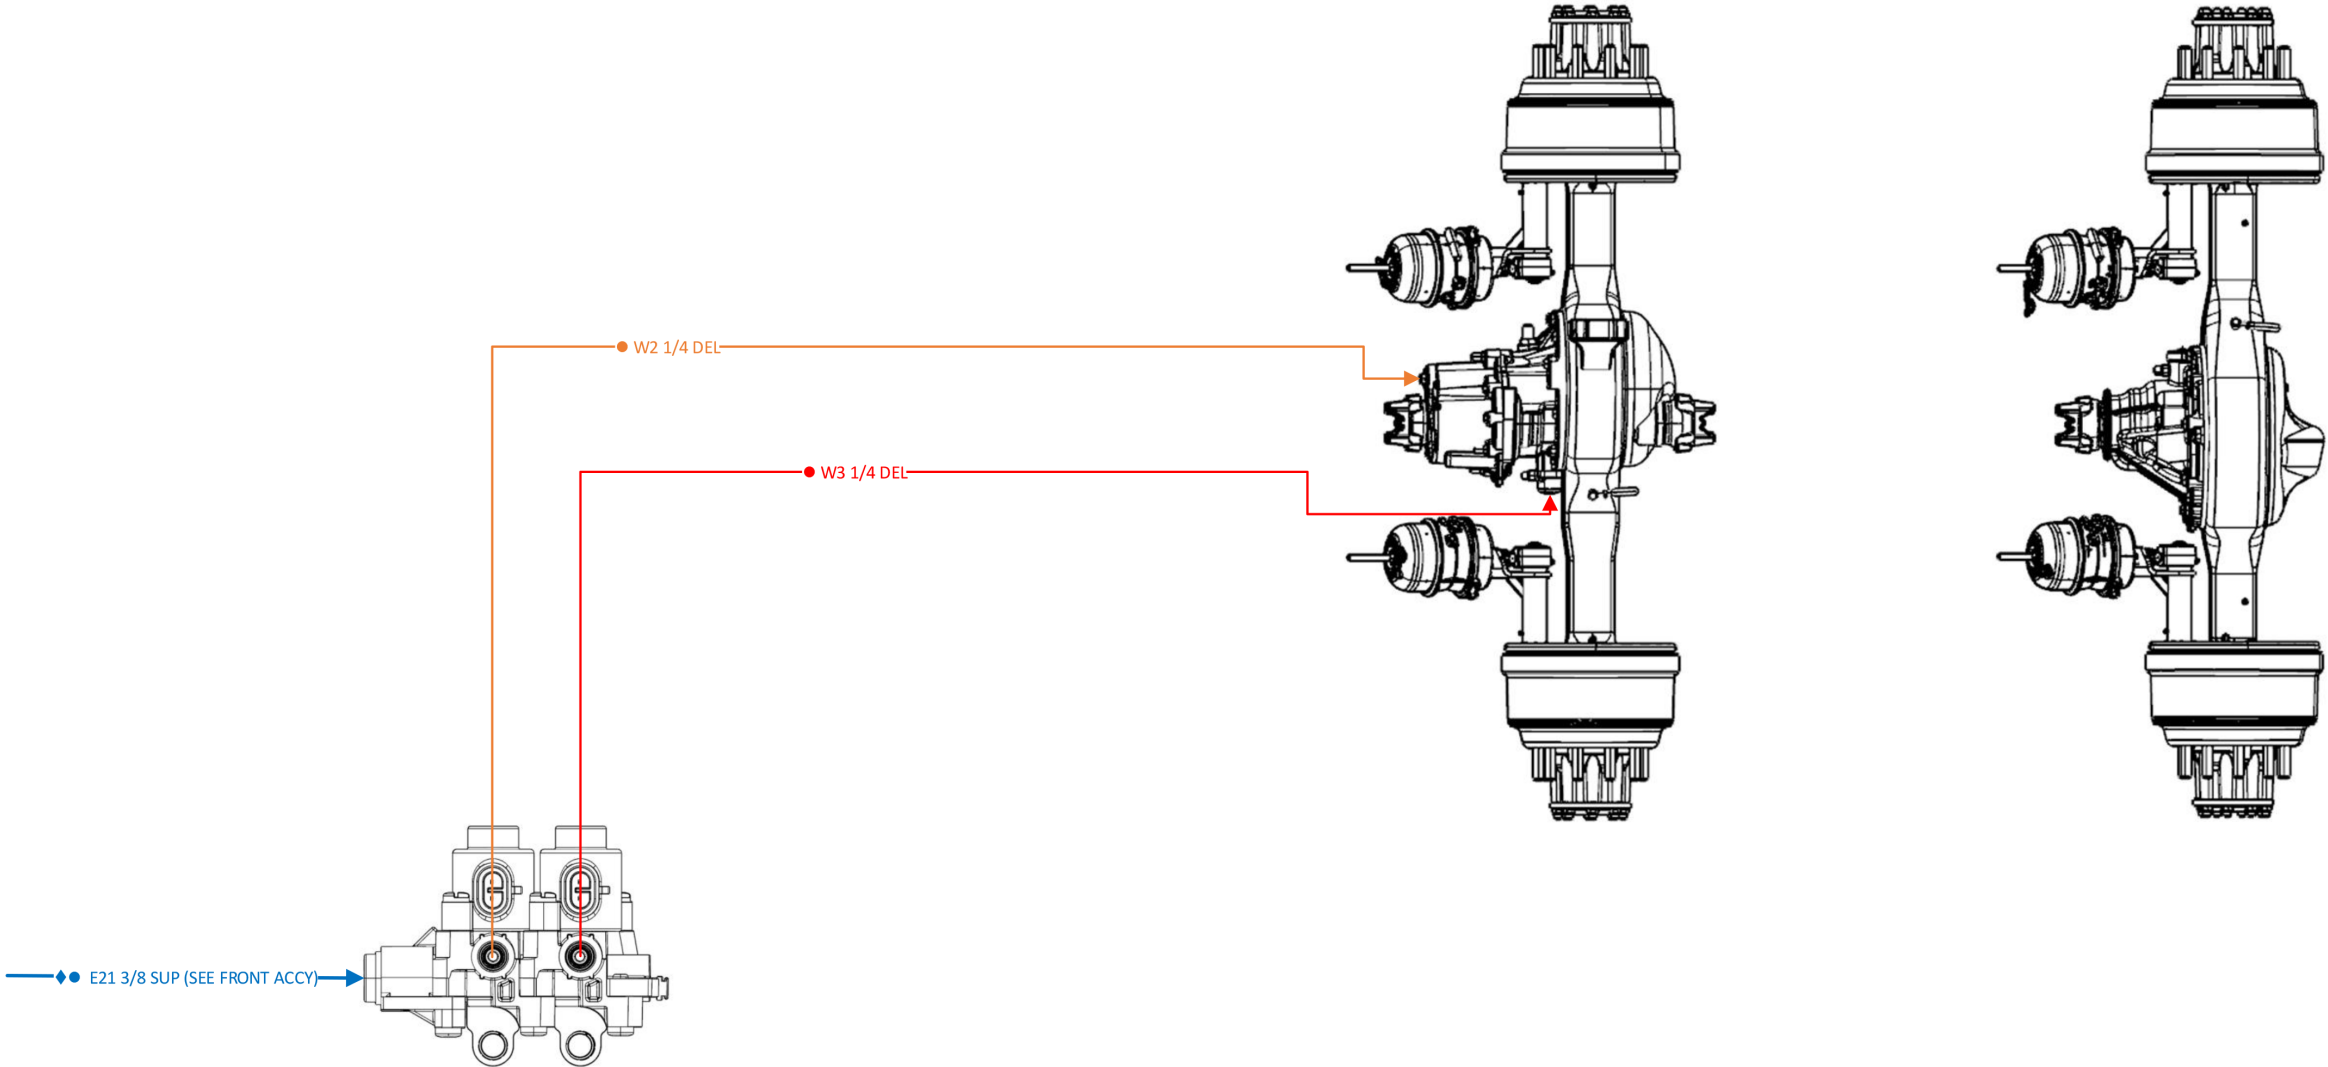


- ◆ WHEELBASE DEPENDANT
- SUSPENSION TYPE DEPENDANT

\*Schematic line routings are not representative to actual vehicle placement.

PWR DIV  
LOCKING DIFF 1

6X4 REAR  
ACCESSORIES

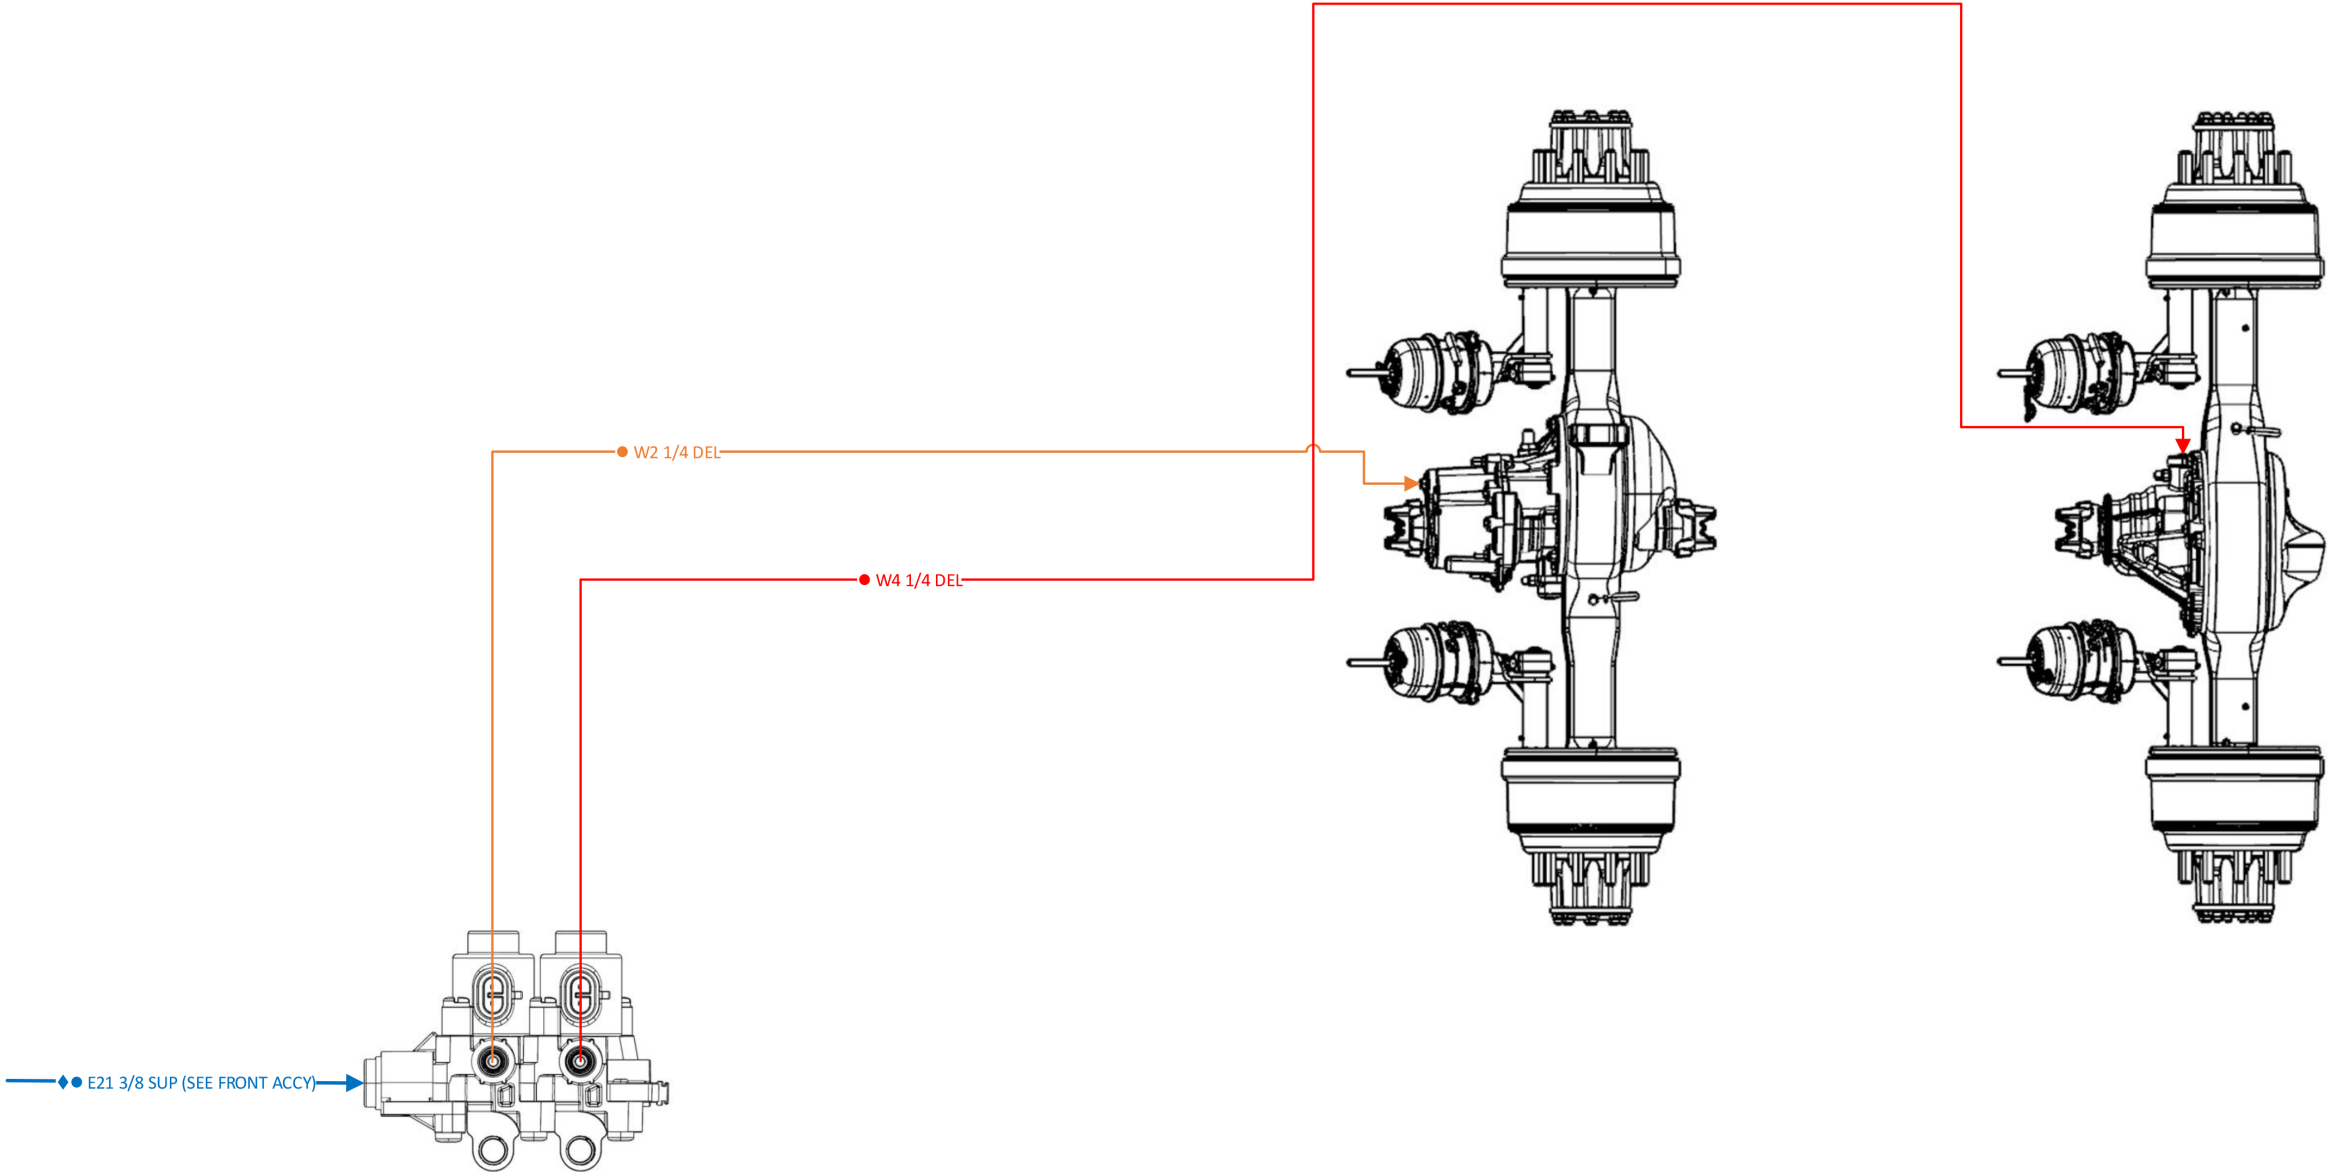


- ◆ WHEELBASE DEPENDANT
- SUSPENSION TYPE DEPENDANT

\*Schematic line routings are not representative to actual vehicle placement.

PWR DIV  
LOCKING DIFF 2

6X4 REAR  
ACCESSORIES



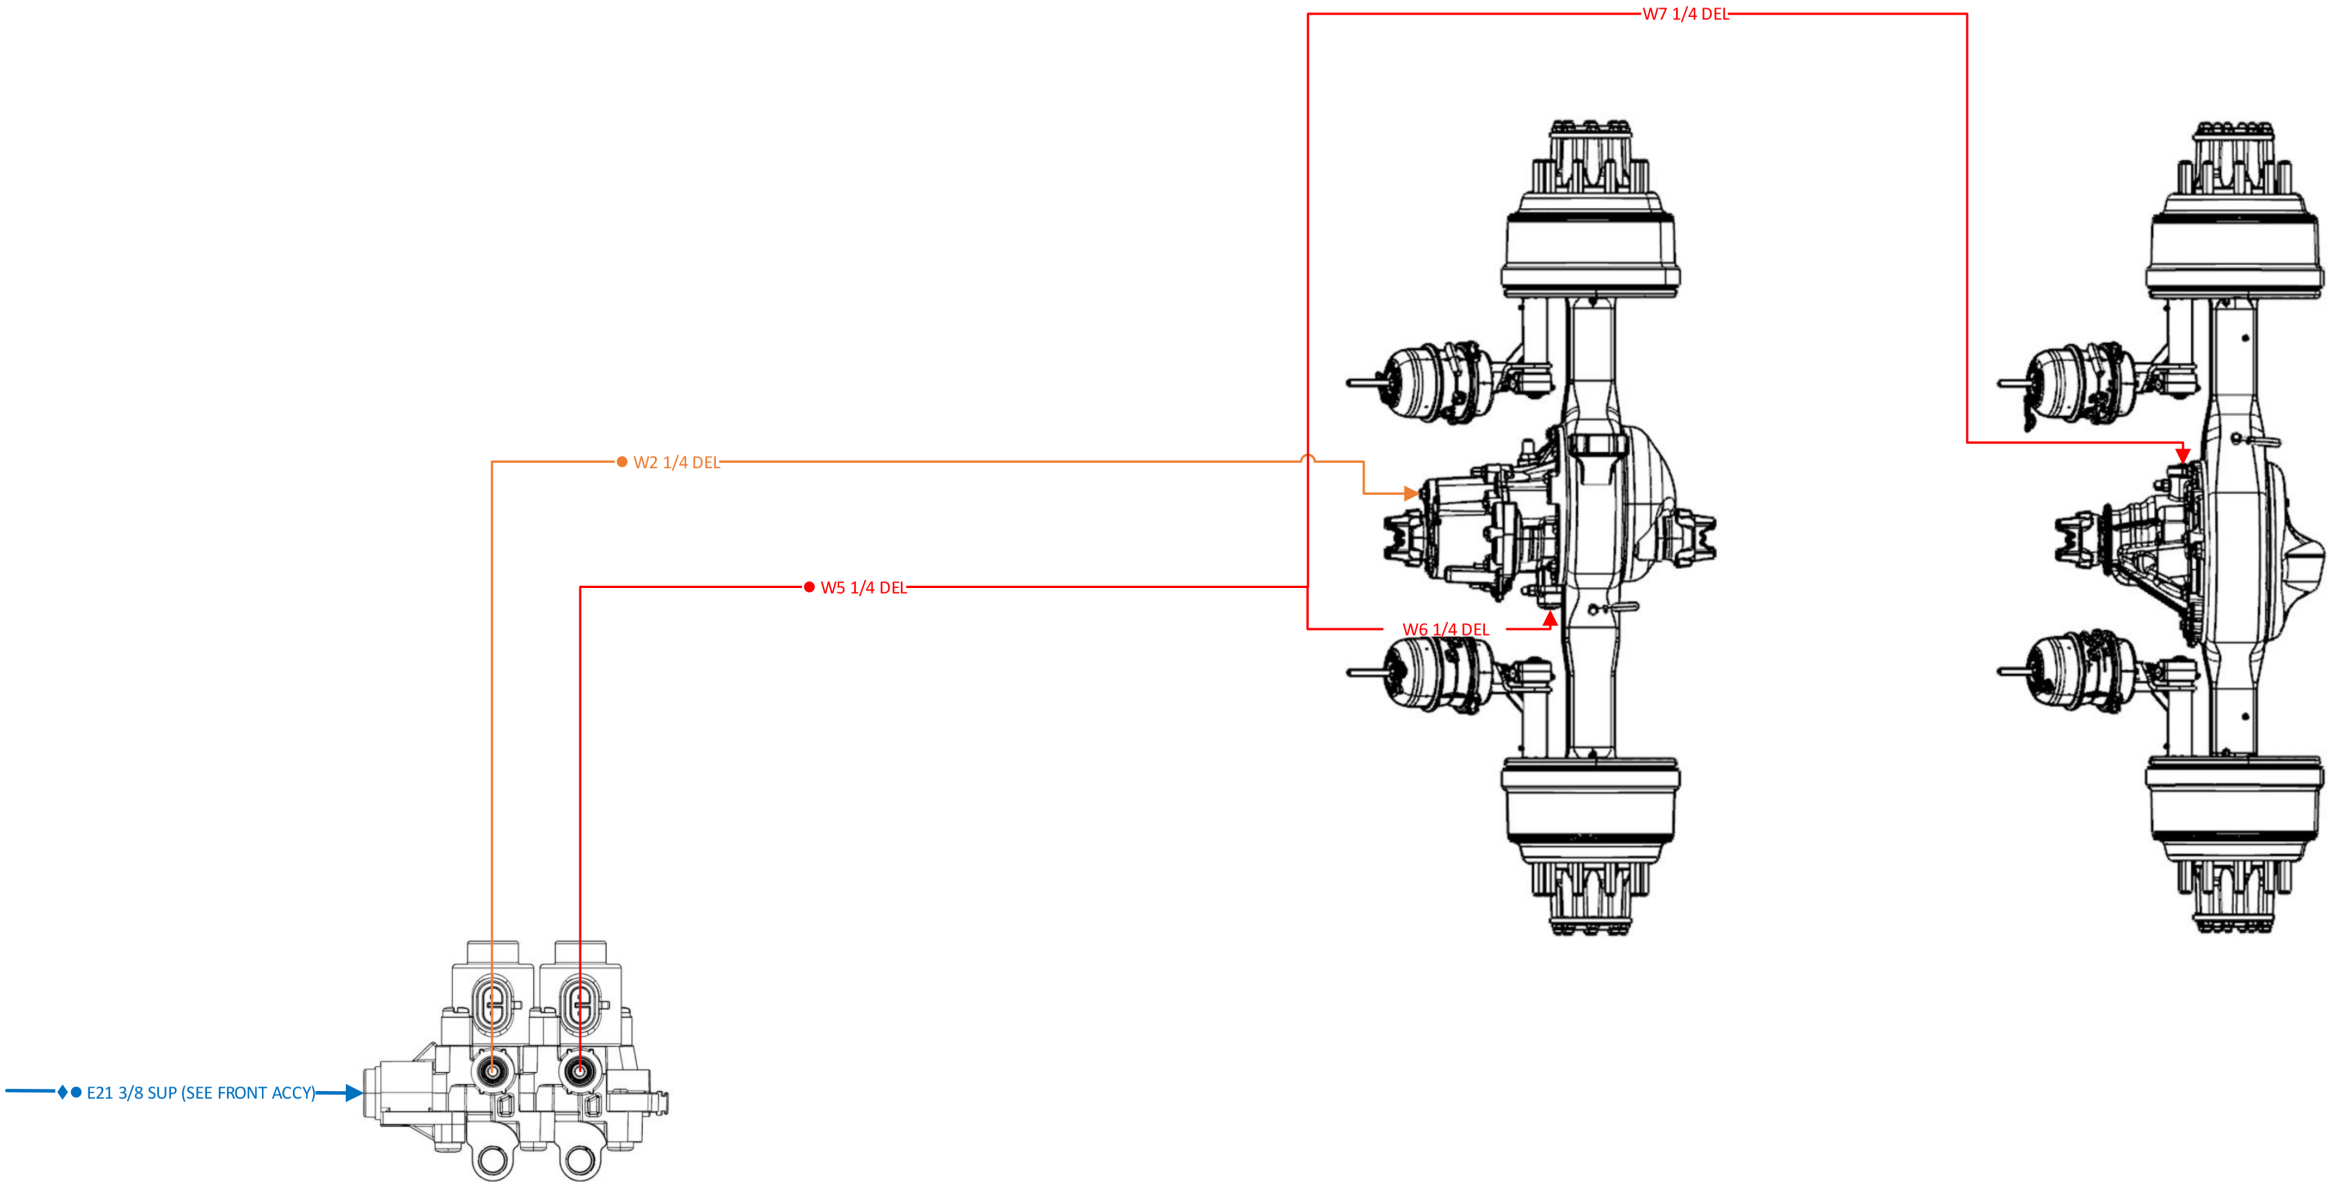
- ◆ WHEELBASE DEPENDANT
- SUSPENSION TYPE DEPENDANT

\*Schematic line routings are not representative to actual vehicle placement.



PWR DIV  
CROSS-LOCK

6X4 REAR  
ACCESSORIES

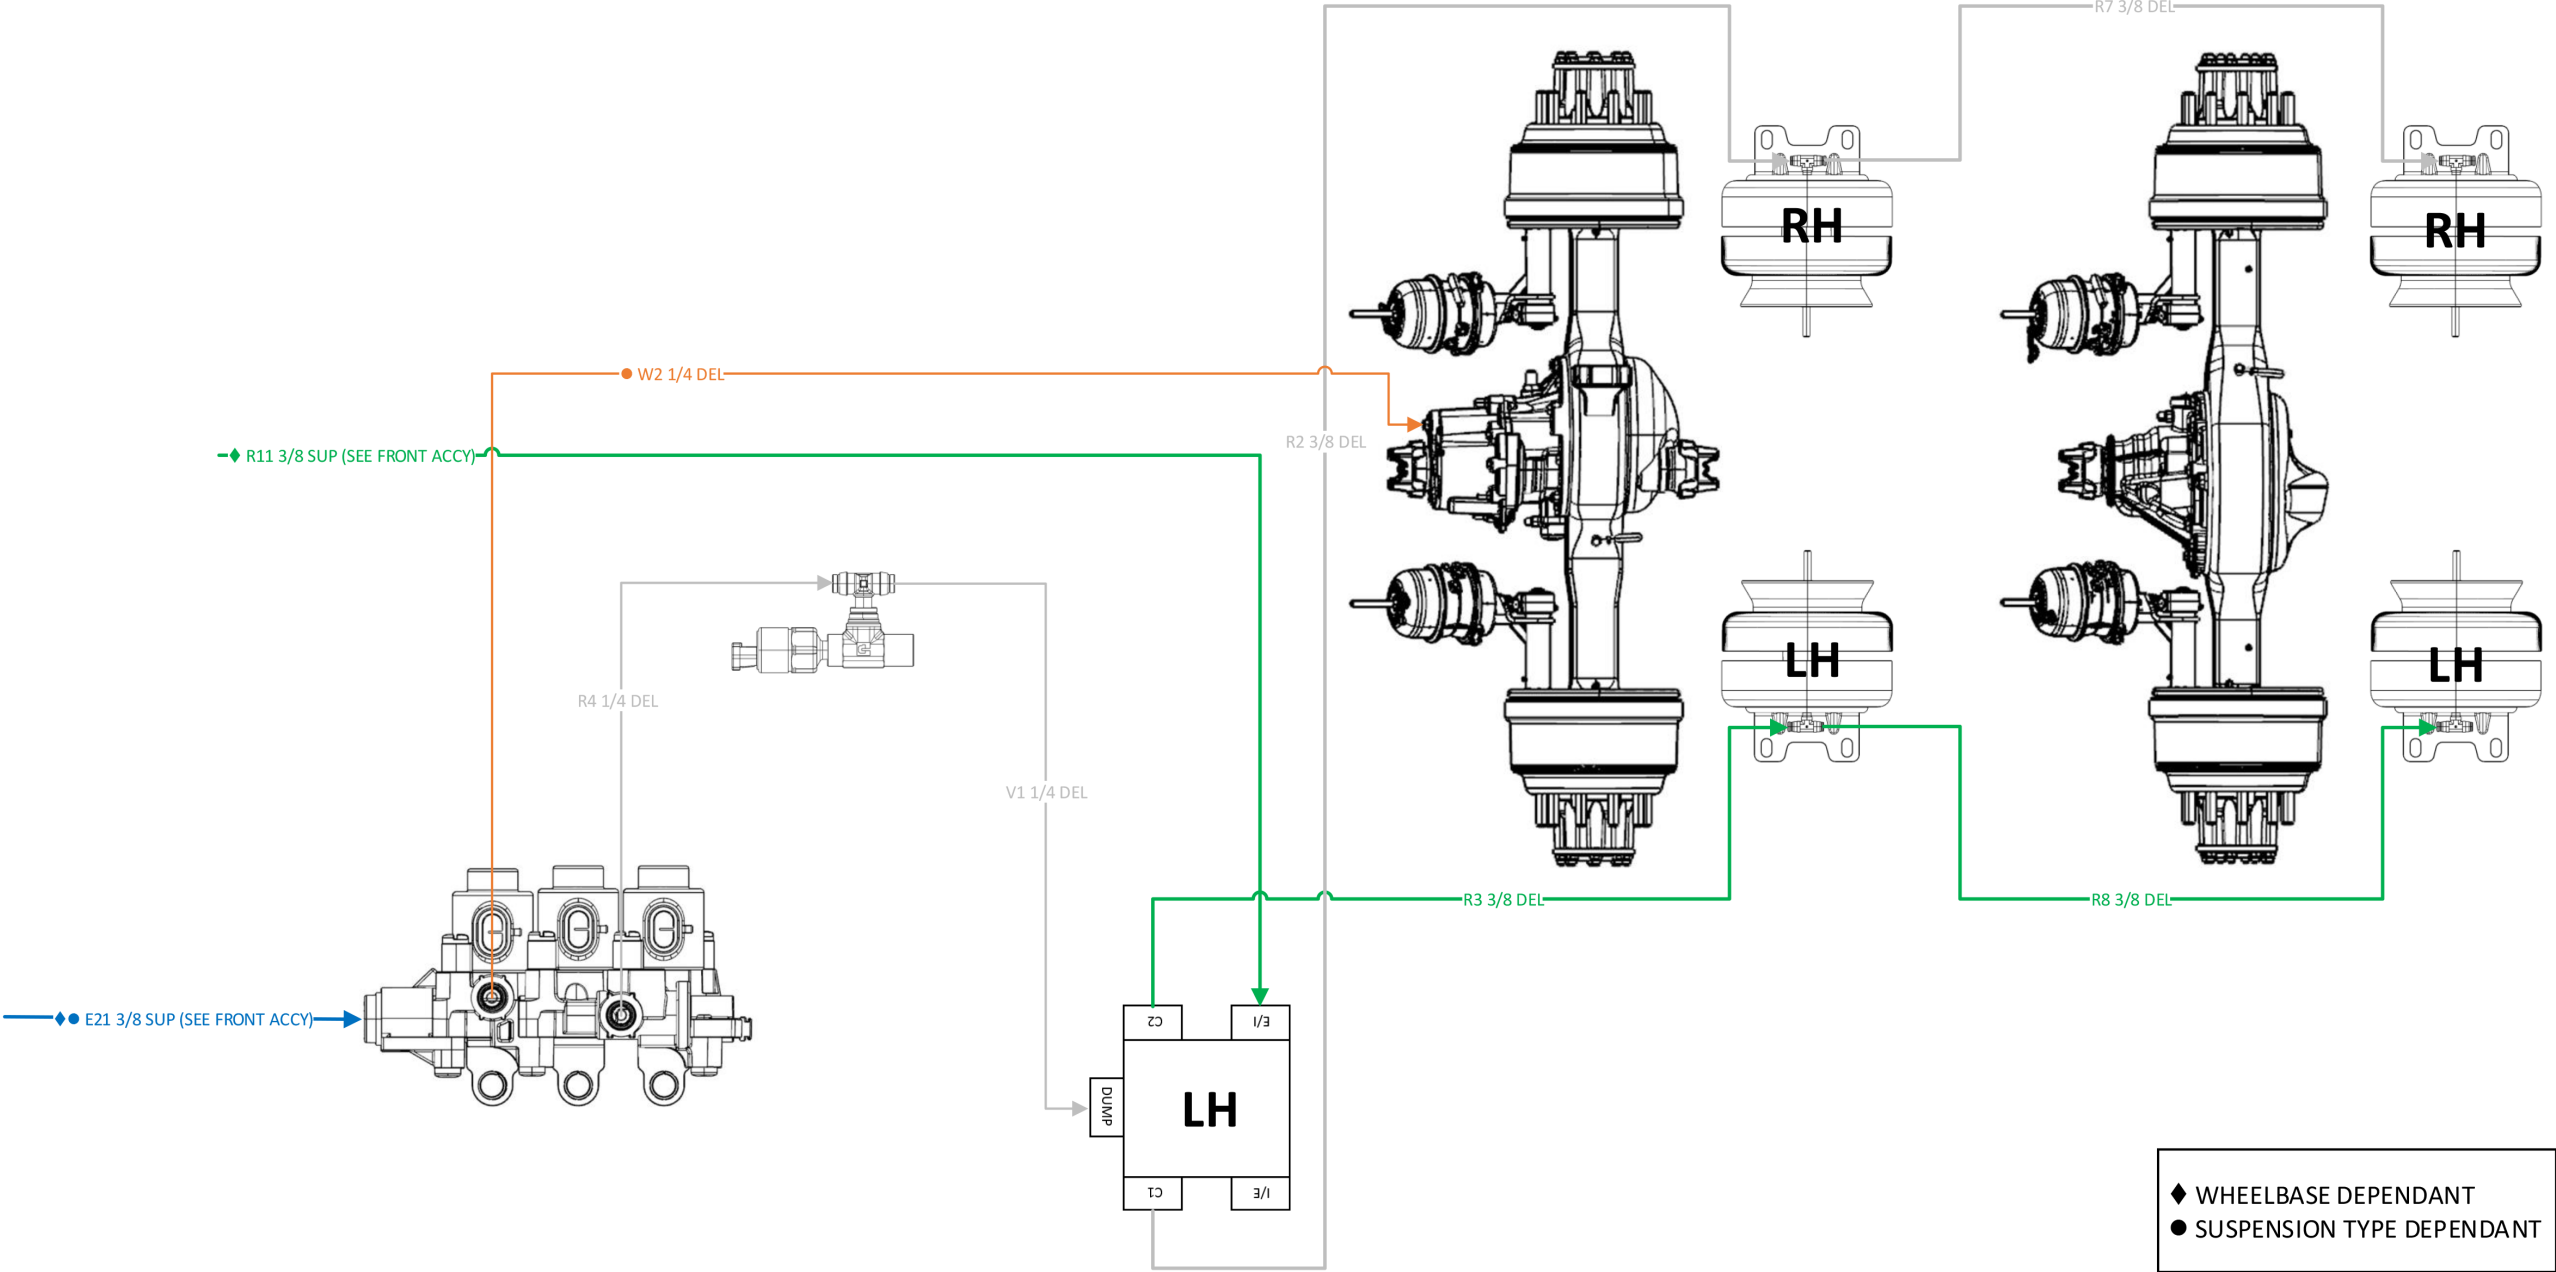


- ◆ WHEELBASE DEPENDANT
- SUSPENSION TYPE DEPENDANT

\*Schematic line routings are not representative to actual vehicle placement.

PWR DIV  
AIR SUSP  
(SINGLE LEVEL  
W/DUMP)

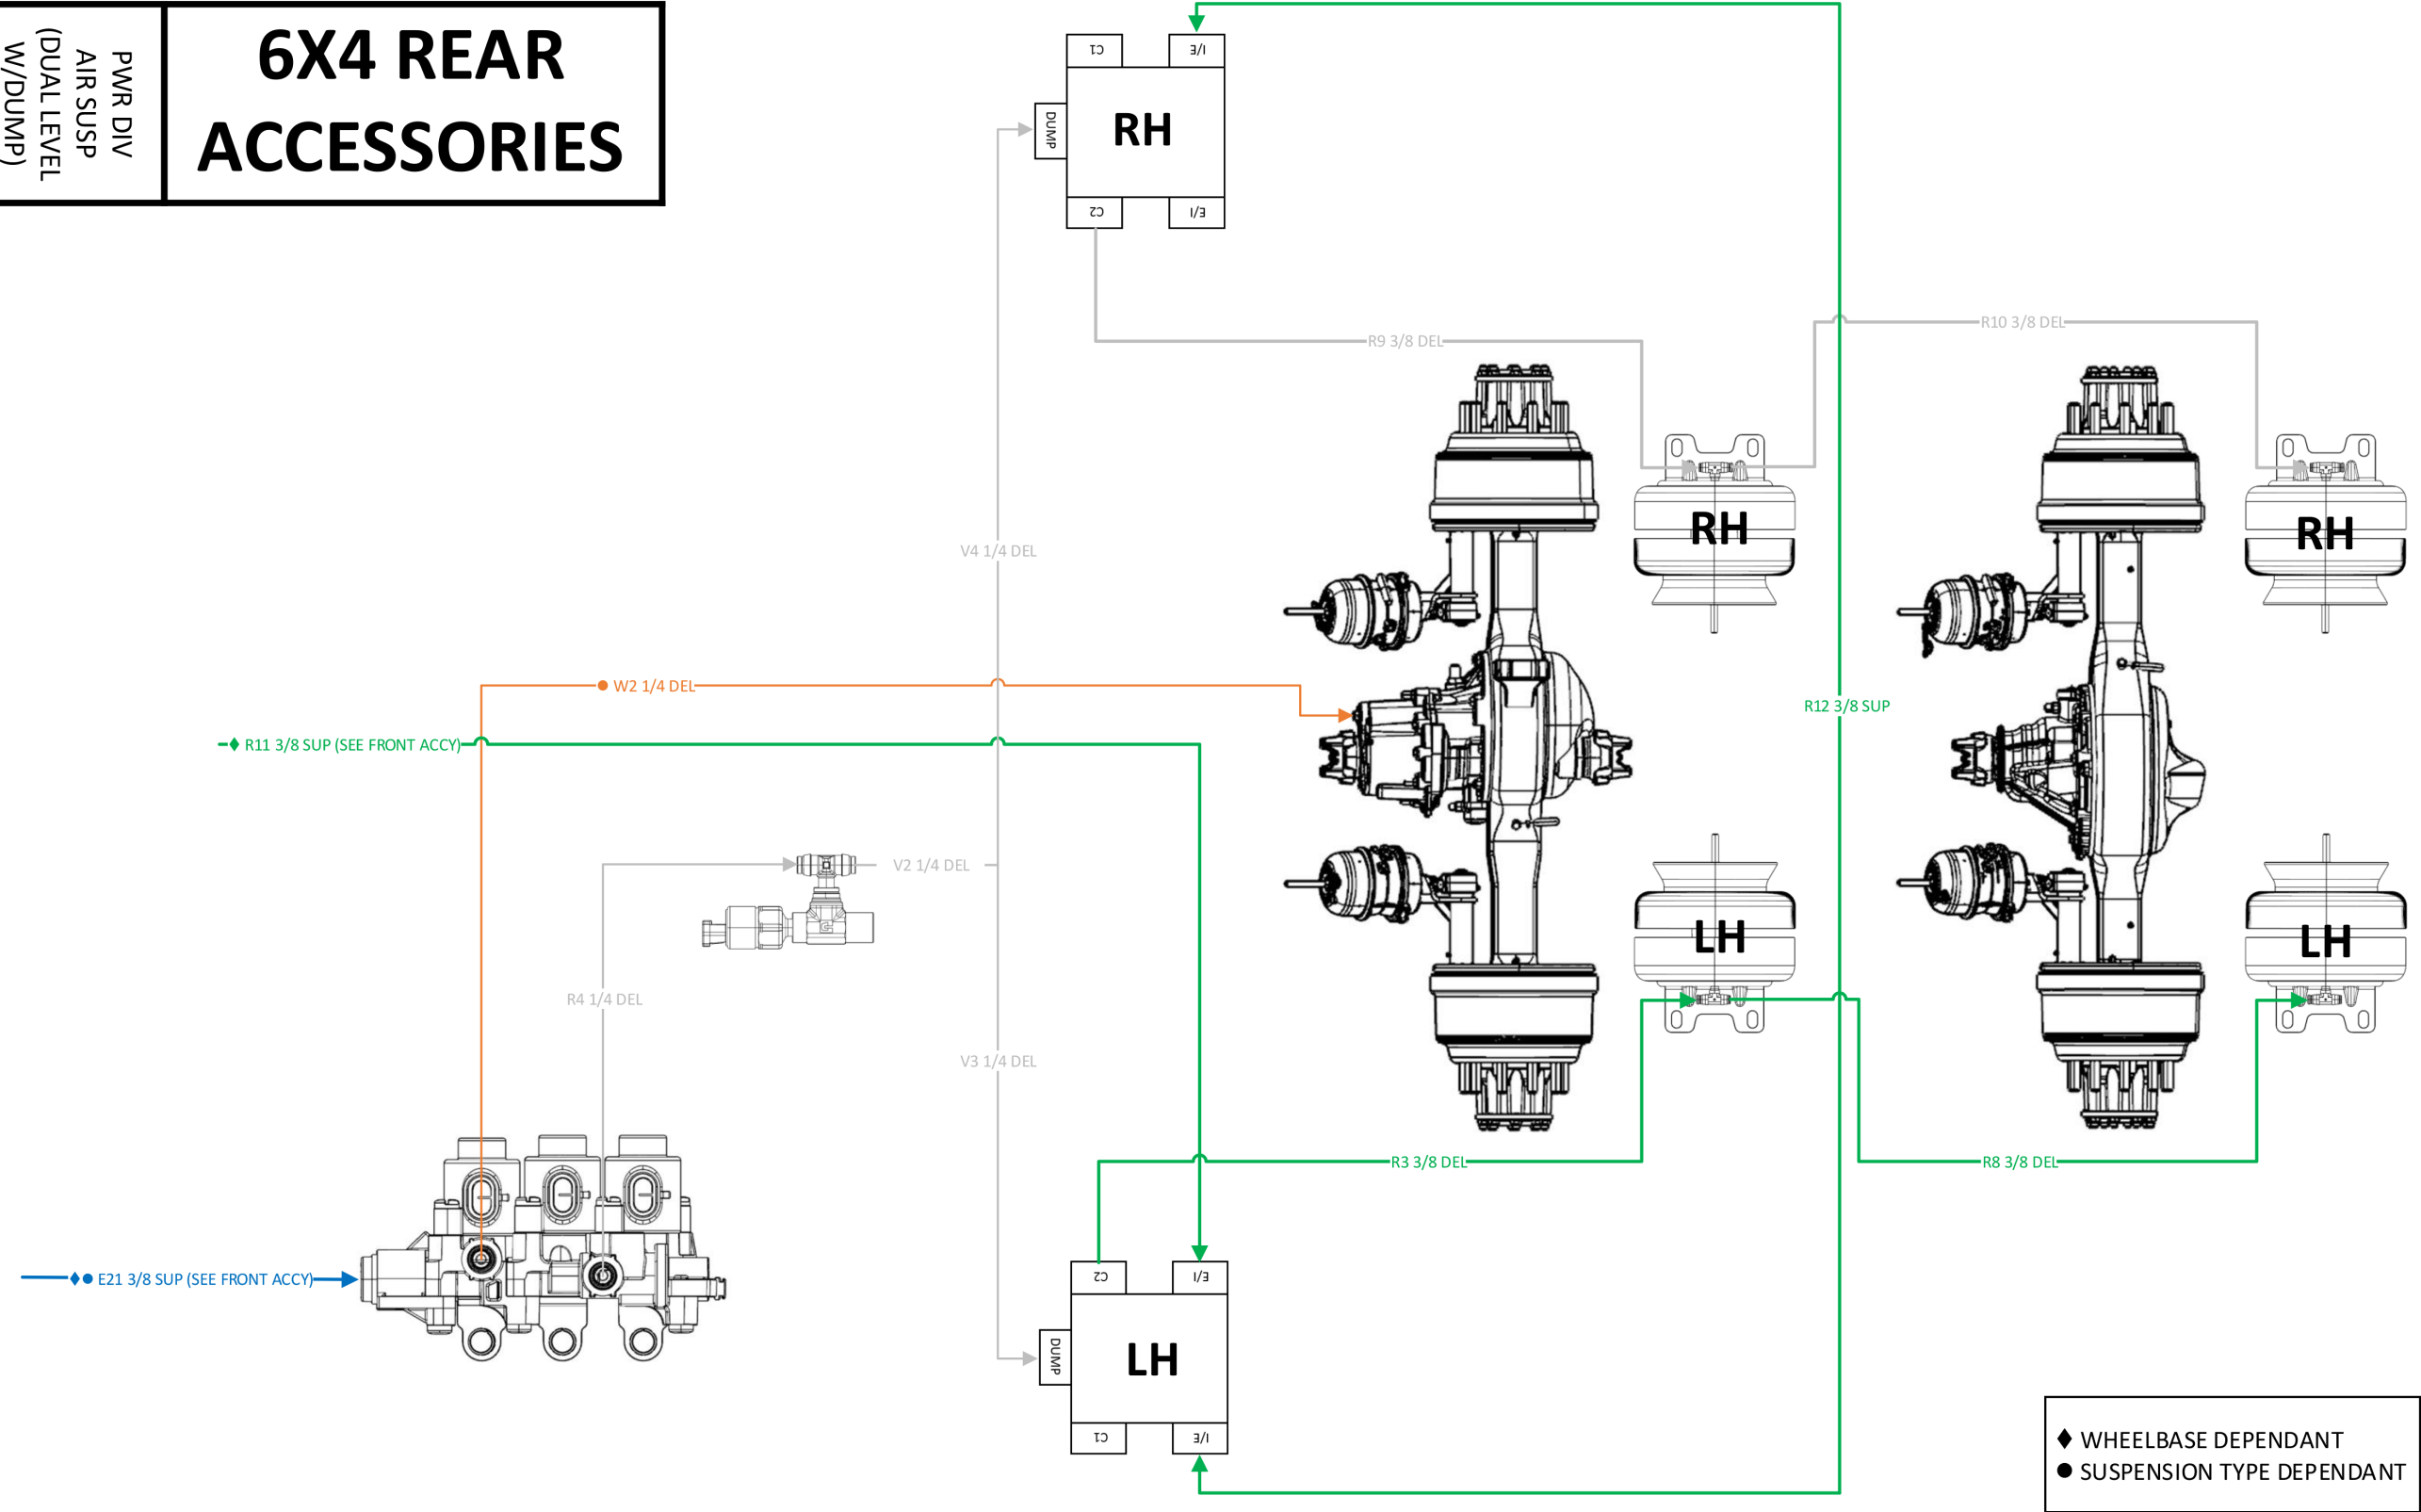
# 6X4 REAR ACCESSORIES



\*Schematic line routings are not representative to actual vehicle placement.

PWR DIV  
AIR SUSP  
(DUAL LEVEL  
W/DUMP)

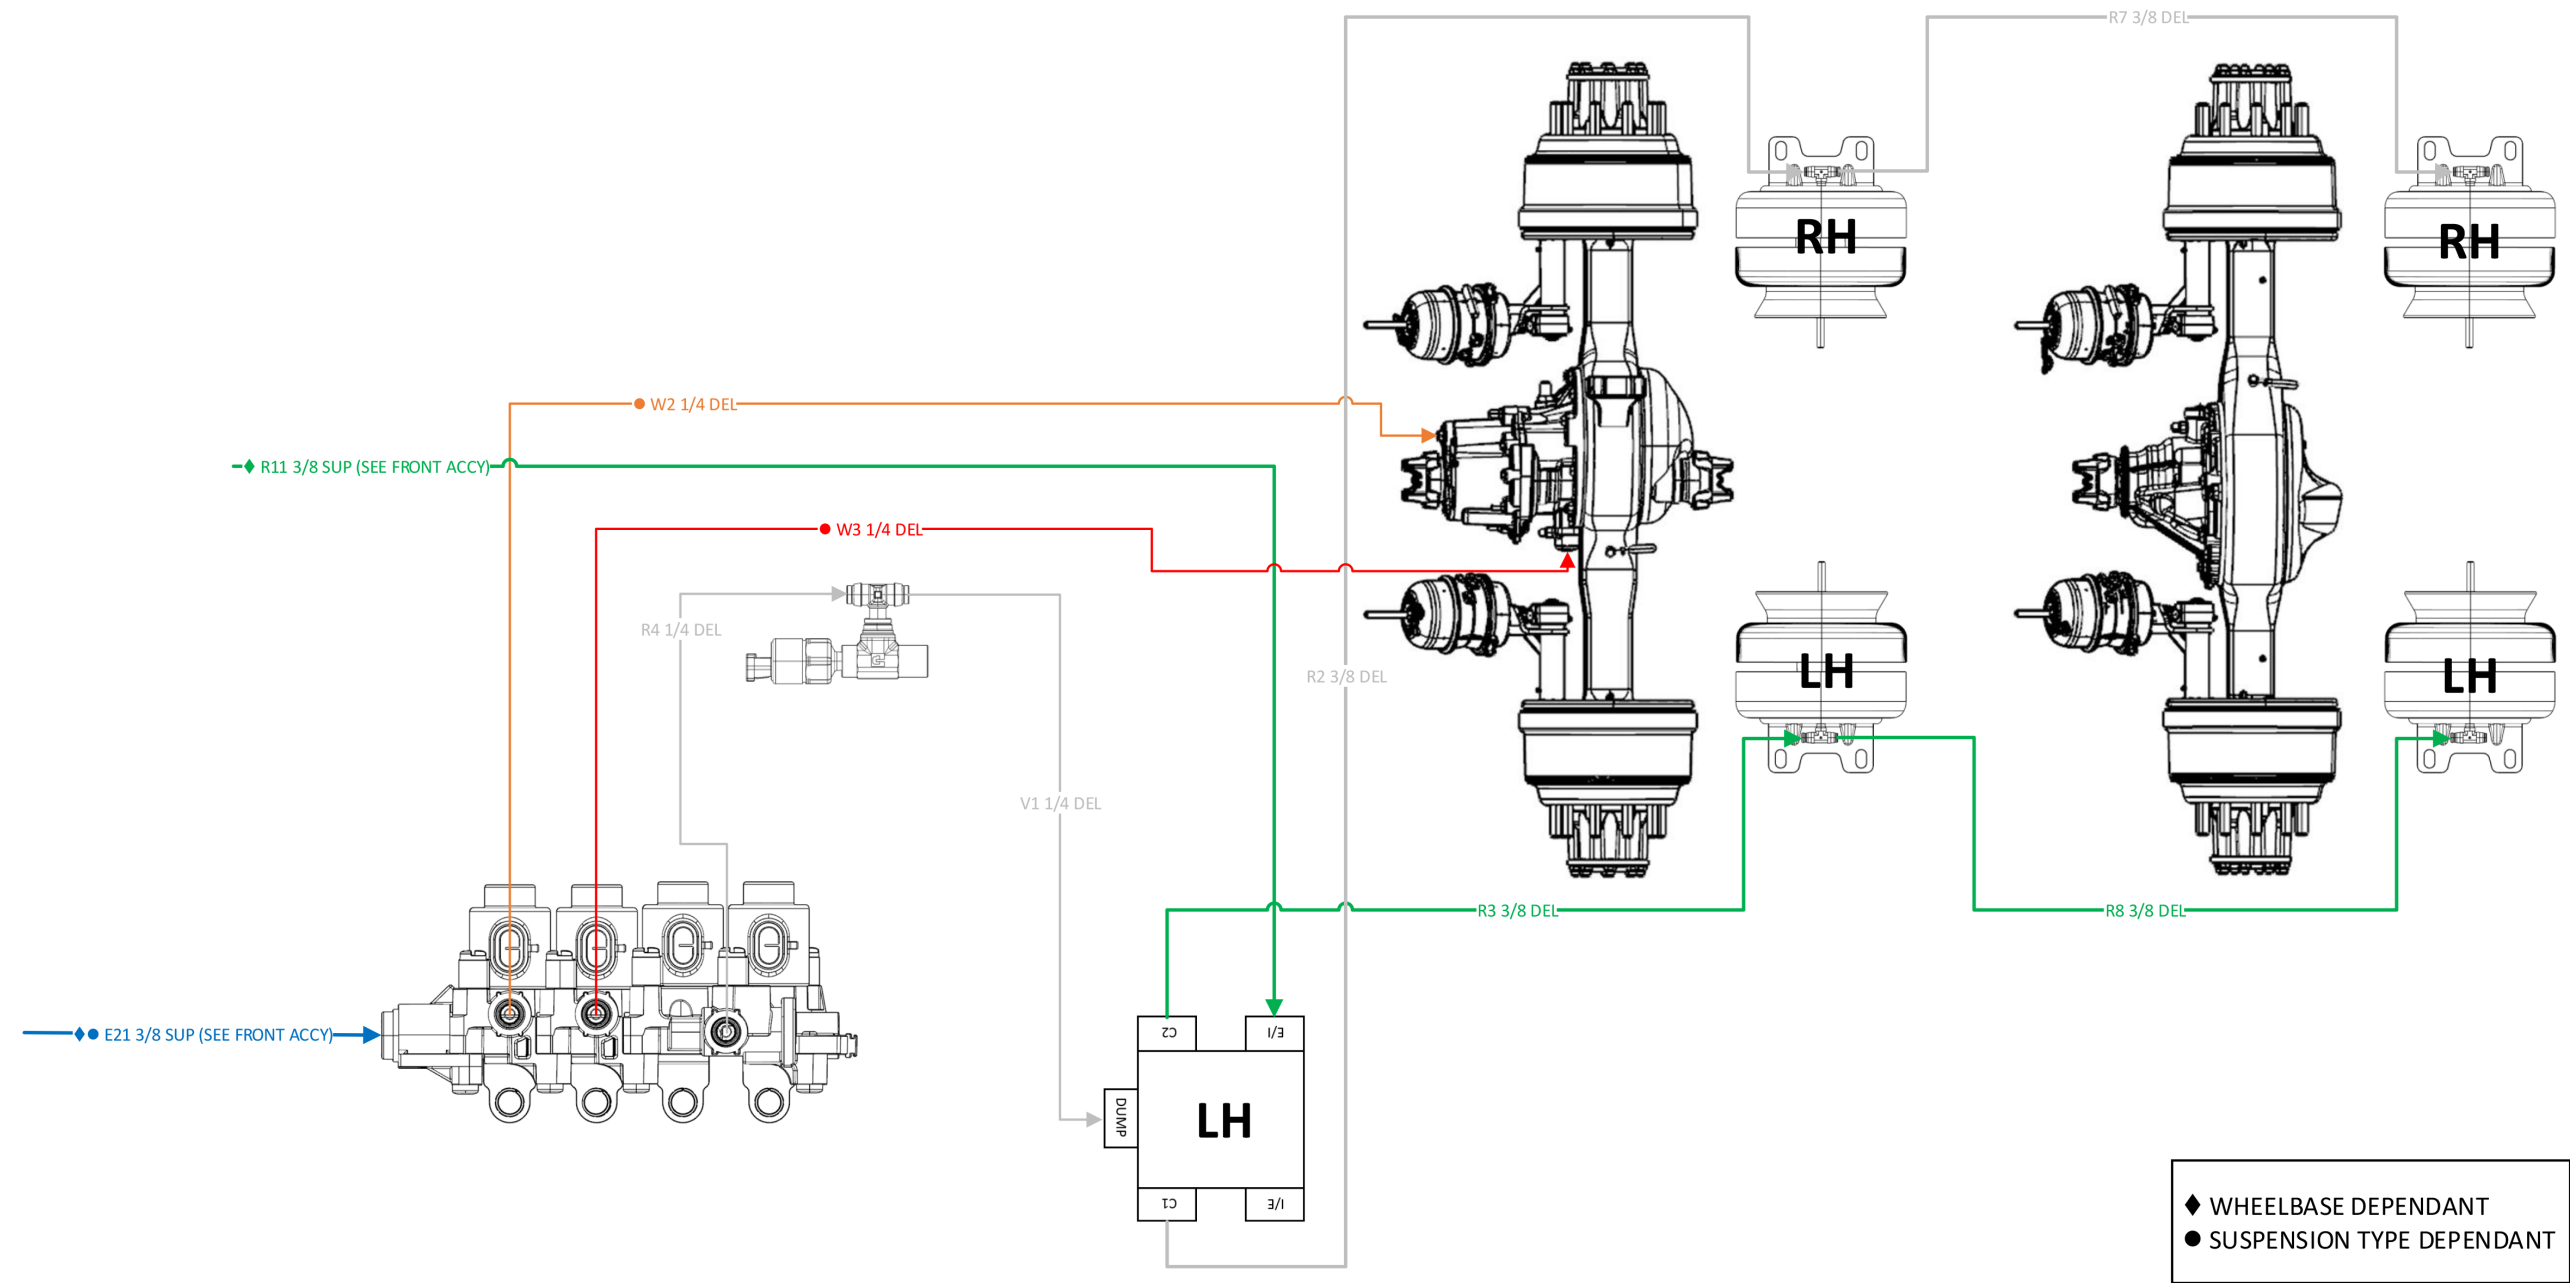
# 6X4 REAR ACCESSORIES



\*Schematic line routings are not representative to actual vehicle placement.

PWR DIV  
LOCKING DIFF 1  
AIR SUSP  
(SINGLE LEVEL  
W/DUMP)

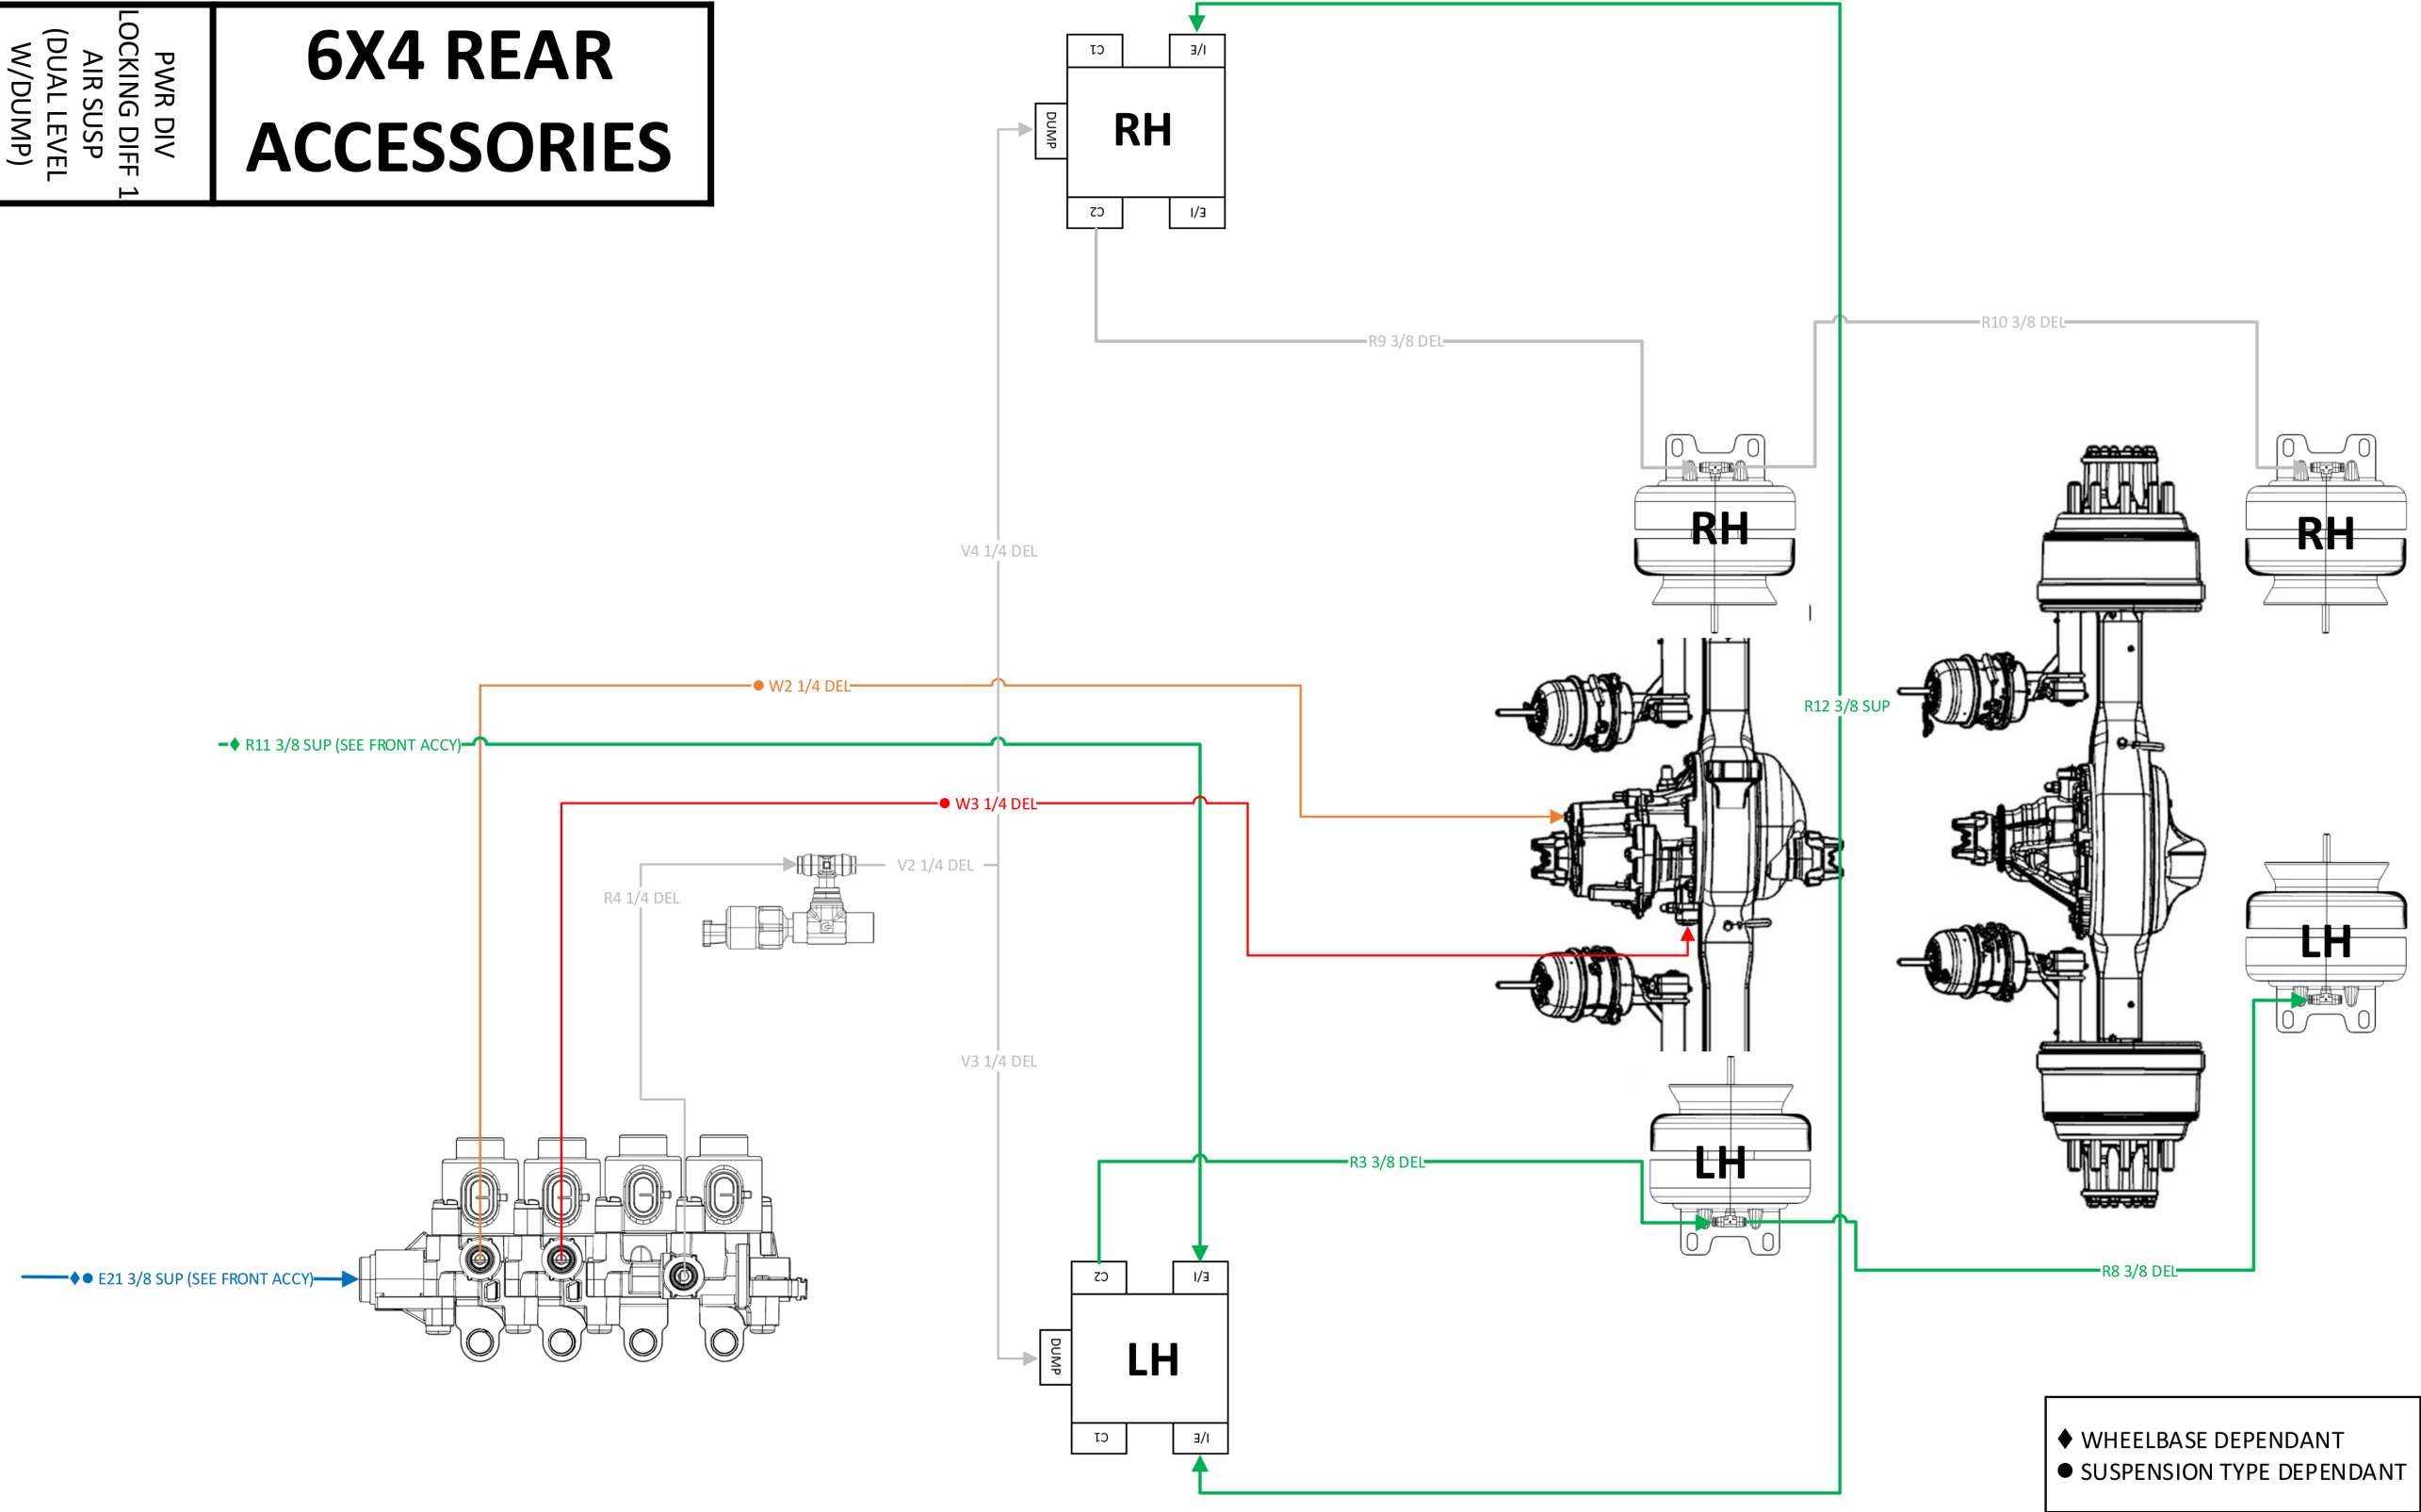
# 6X4 REAR ACCESSORIES



\*Schematic line routings are not representative to actual vehicle placement.

PWR DIV  
LOCKING DIFF 1  
AIR SUSP  
(DUAL LEVEL  
W/DUMP)

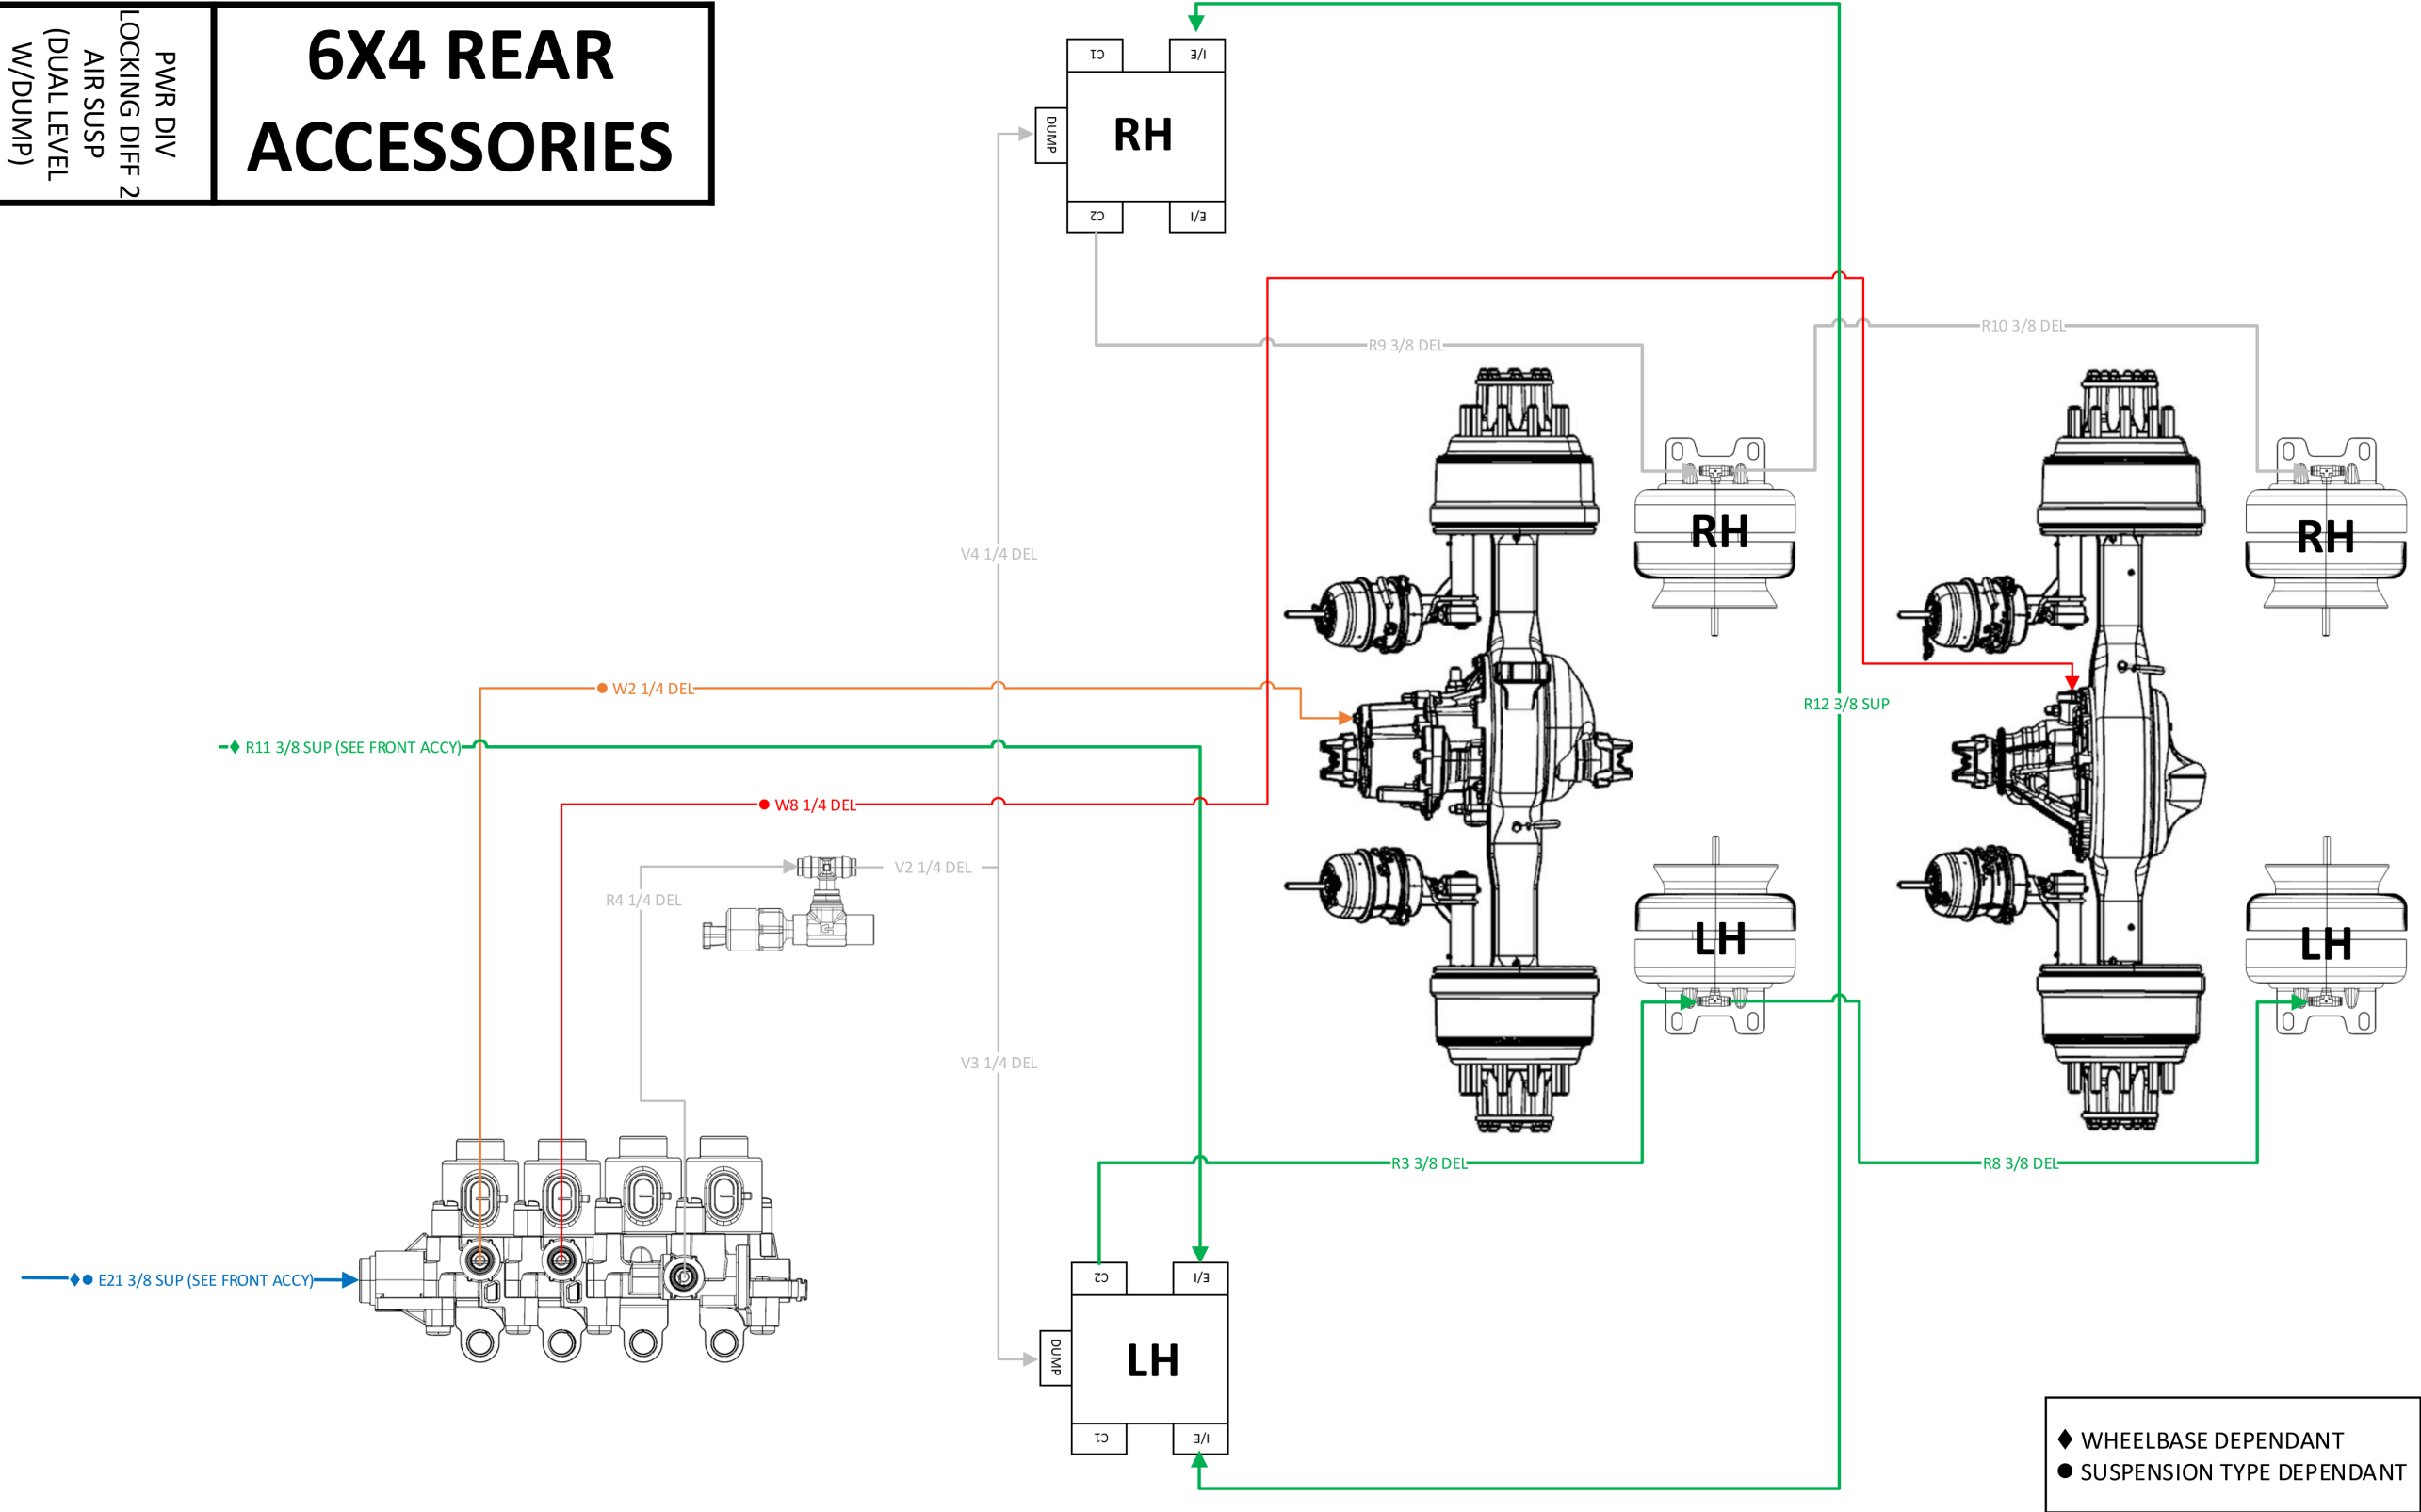
# 6X4 REAR ACCESSORIES



\*Schematic line routings are not representative to actual vehicle placement.

PWR DIV  
LOCKING DIFF 2  
AIR SUSP  
(DUAL LEVEL  
W/DUMP)

# 6X4 REAR ACCESSORIES

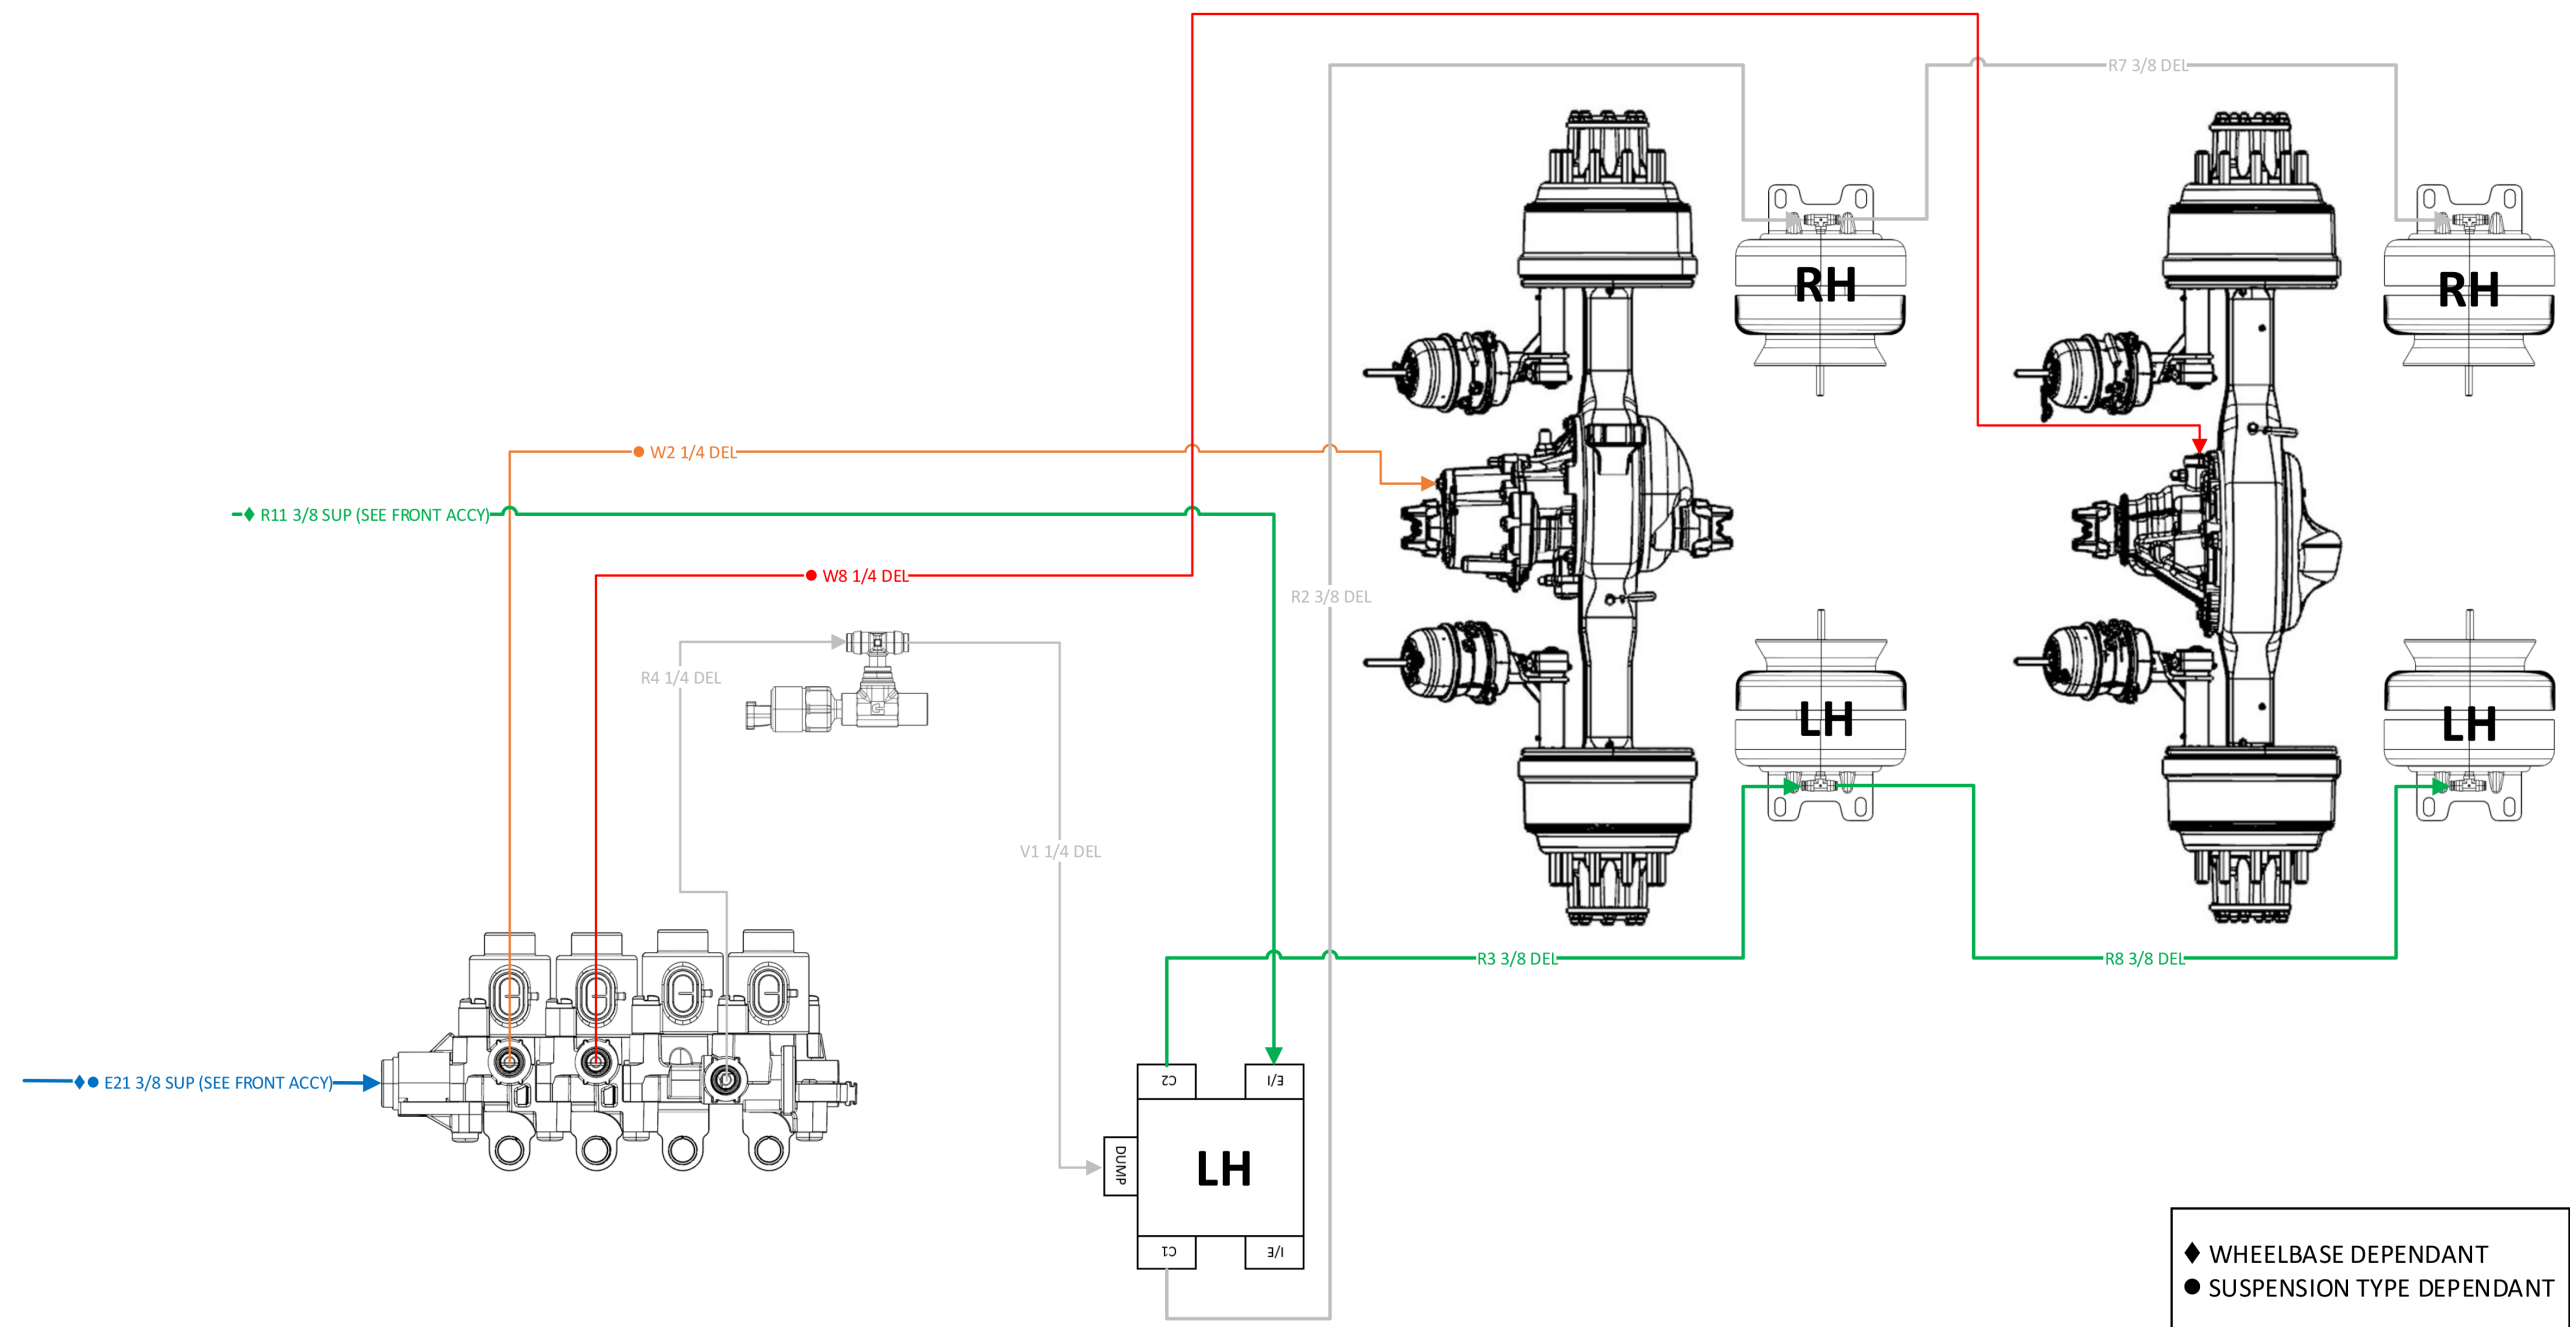


\*Schematic line routings are not representative to actual vehicle placement.



PWR DIV  
LOCKING DIFF 2  
AIR SUSP  
(SINGLE LEVEL  
W/DUMP)

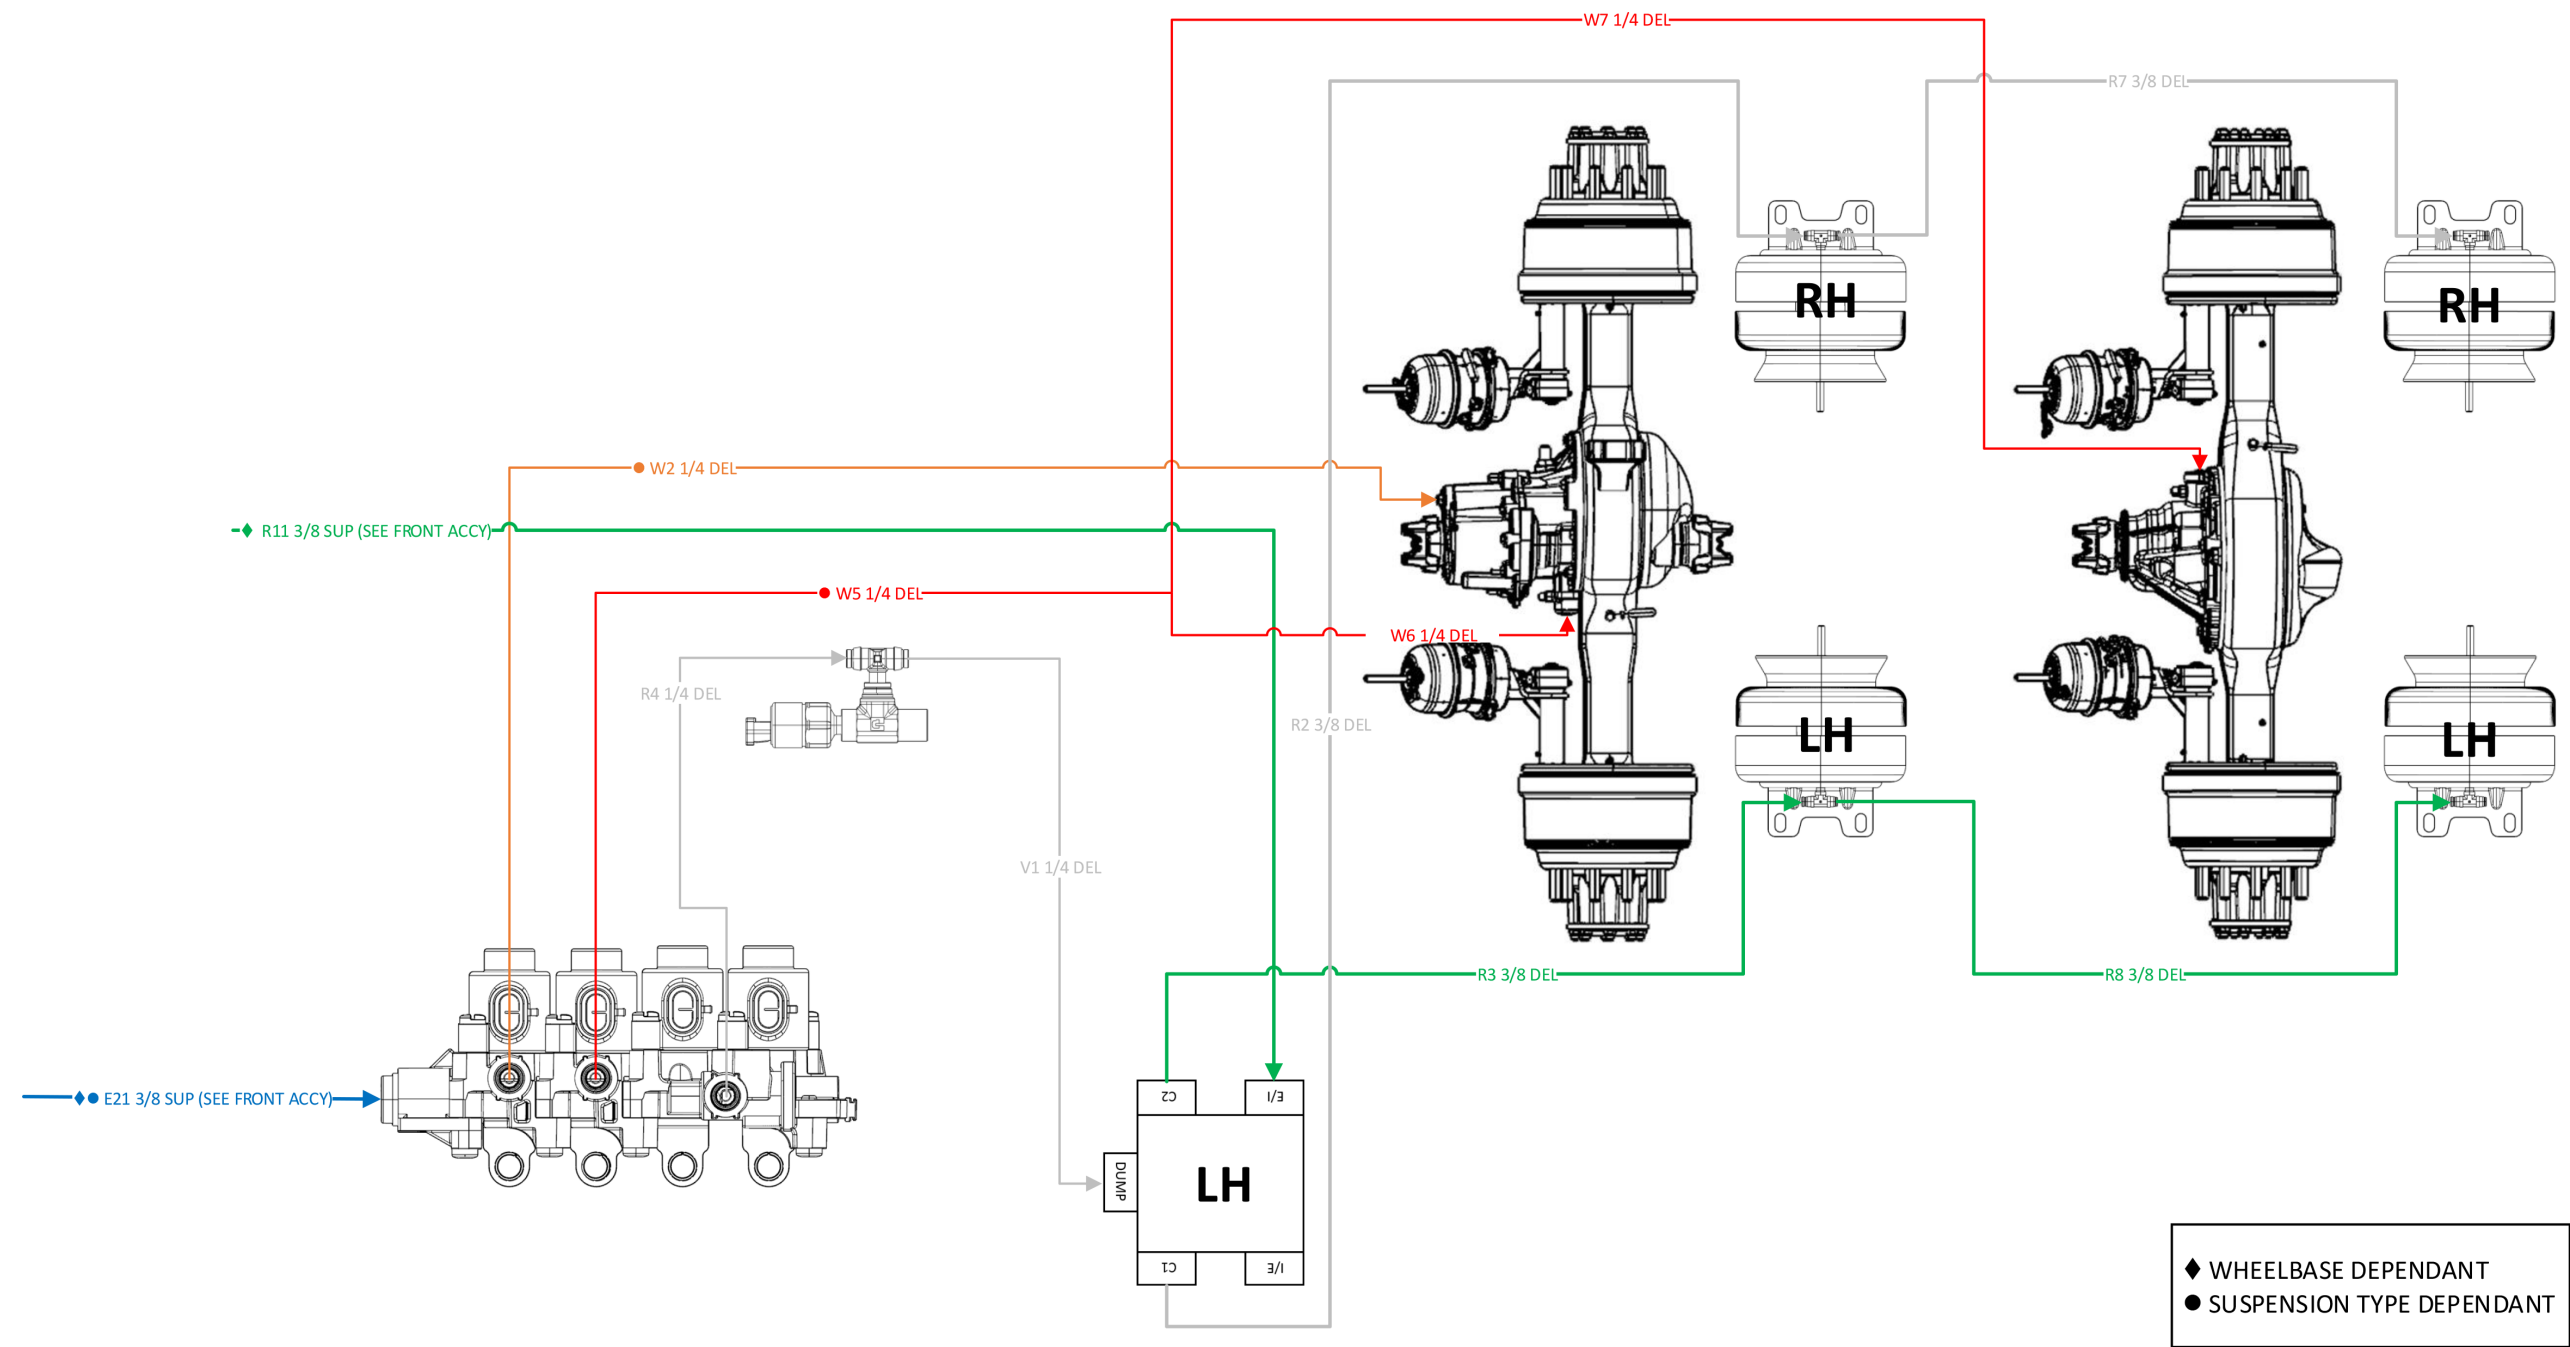
6X4 REAR  
ACCESSORIES



\*Schematic line routings are not representative to actual vehicle placement.

PWR DIV  
CROSS-LOCK  
AIR SUSP  
(SINGLE LEVEL  
W/DUMP)

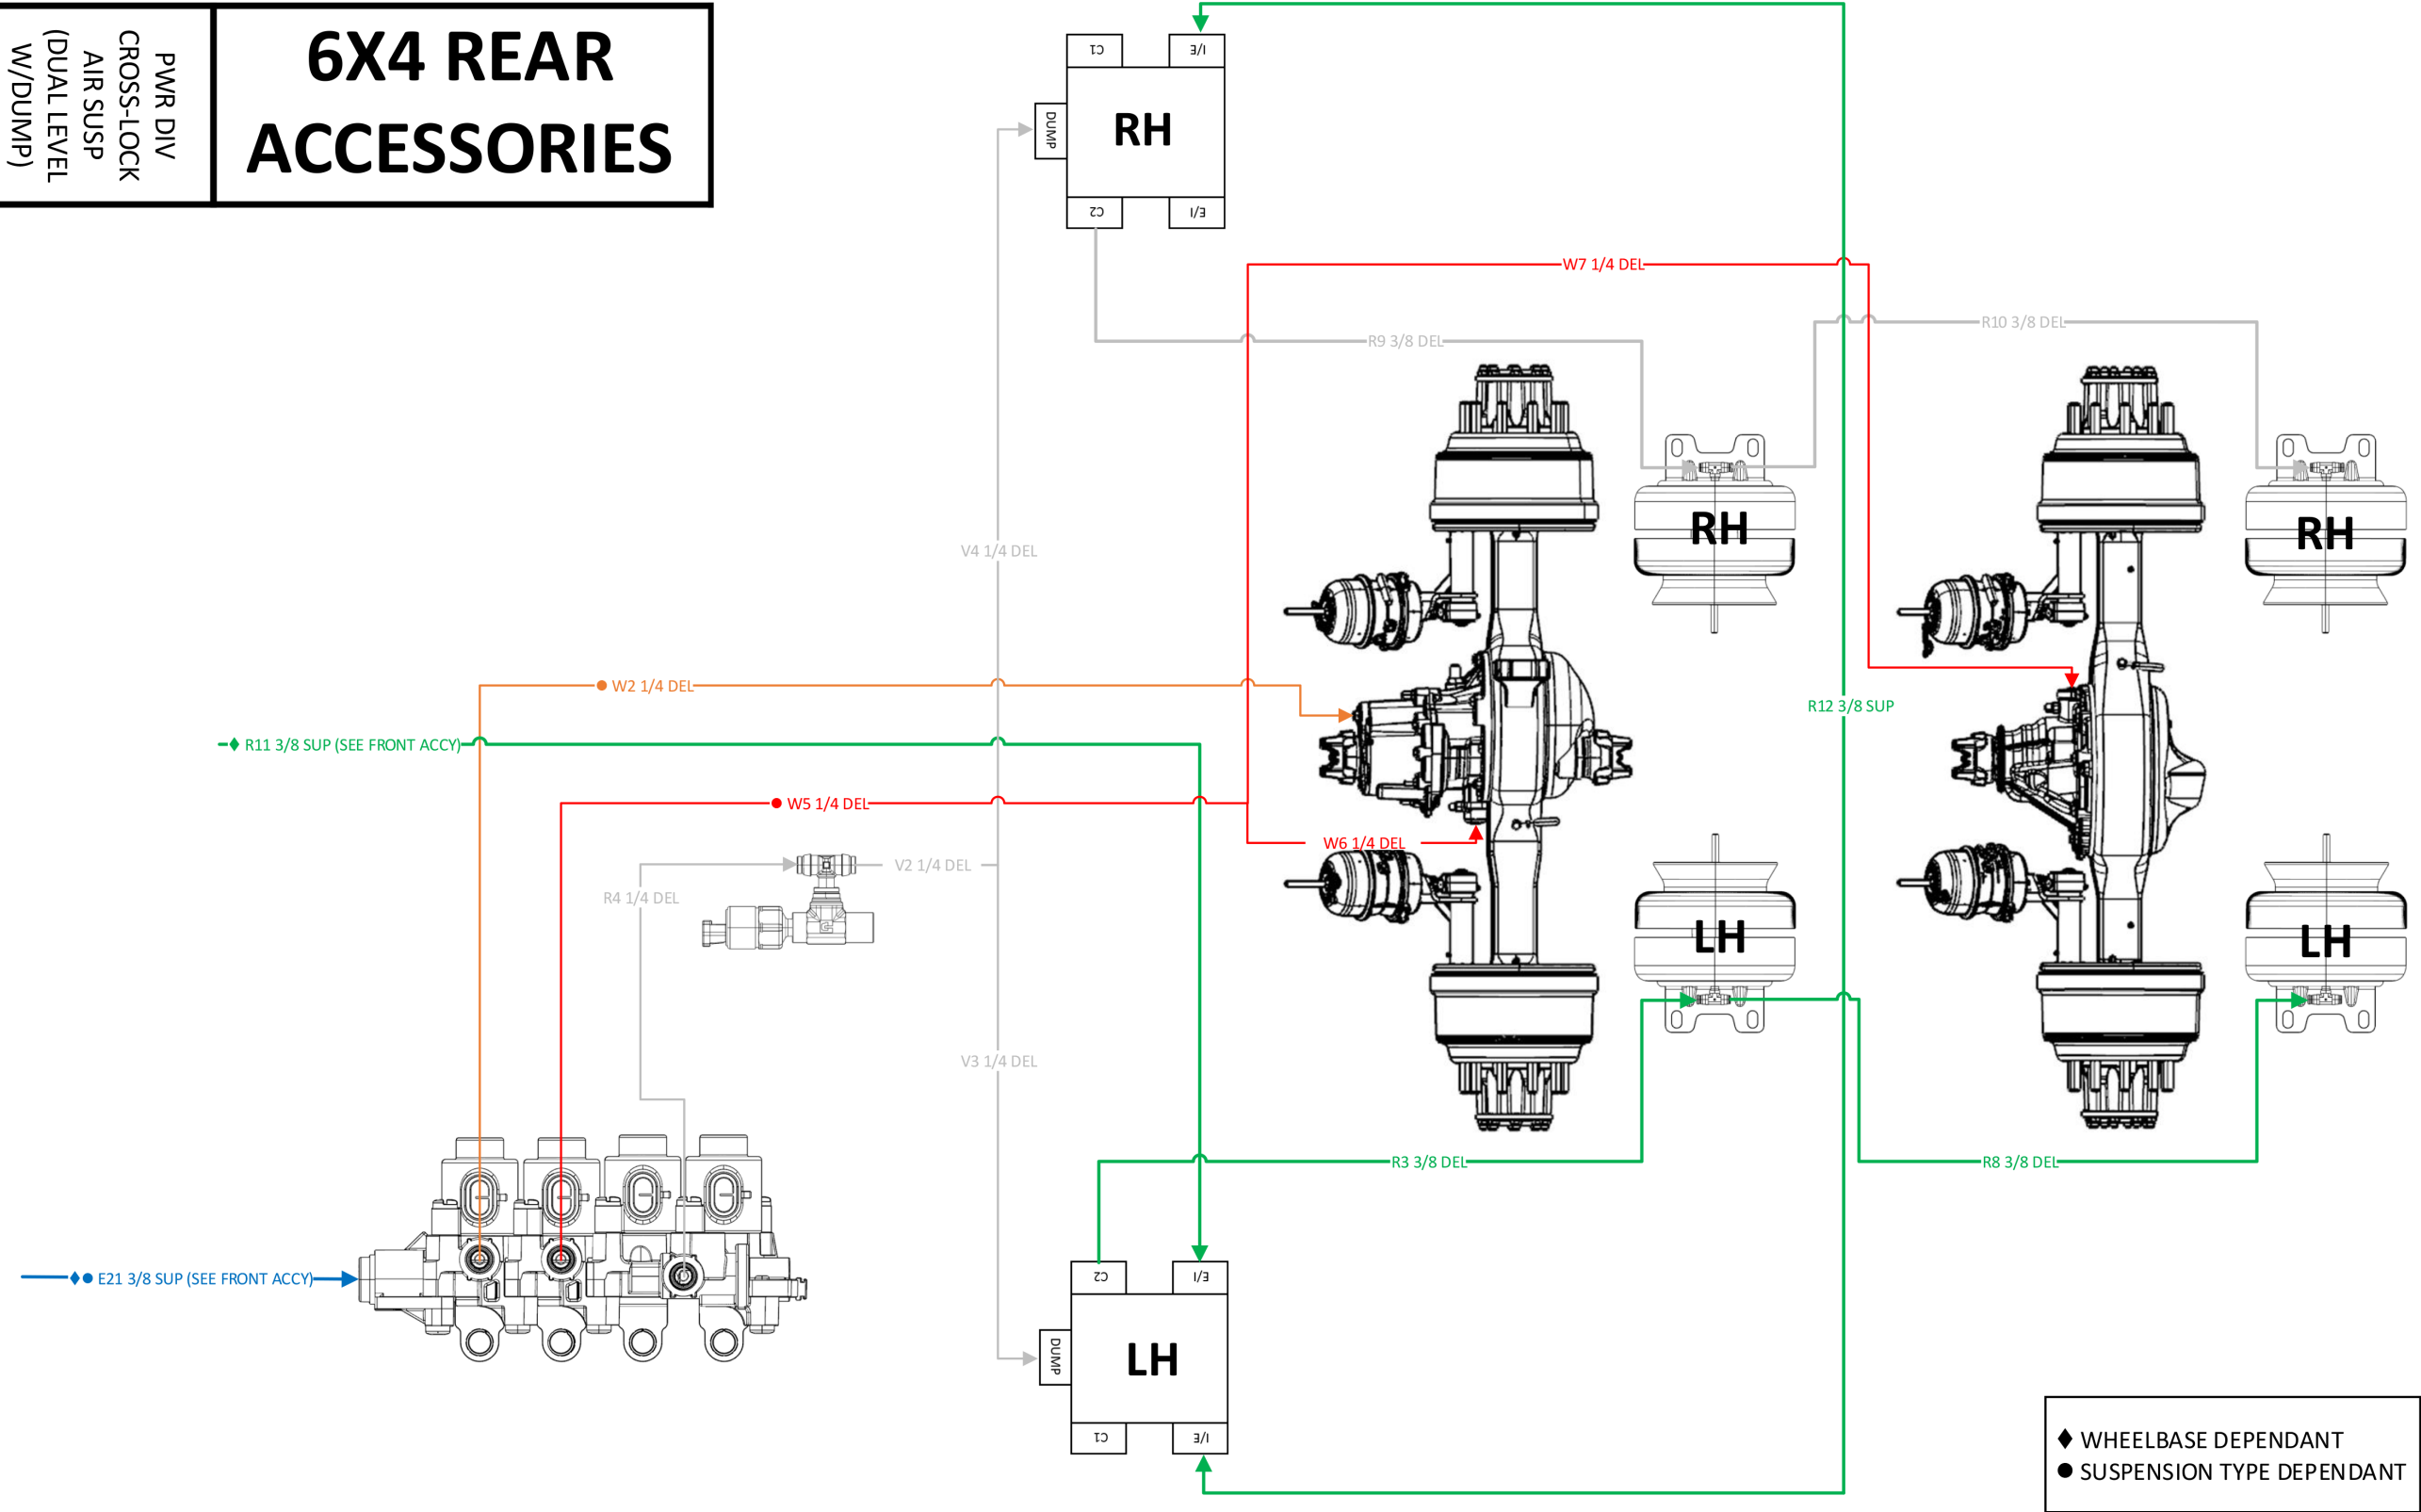
# 6X4 REAR ACCESSORIES





PWR DIV  
CROSS-LOCK  
AIR SUSP  
(DUAL LEVEL  
W/DUMP)

# 6X4 REAR ACCESSORIES



## 4. ELECTRIC WIRING DIAGRAM

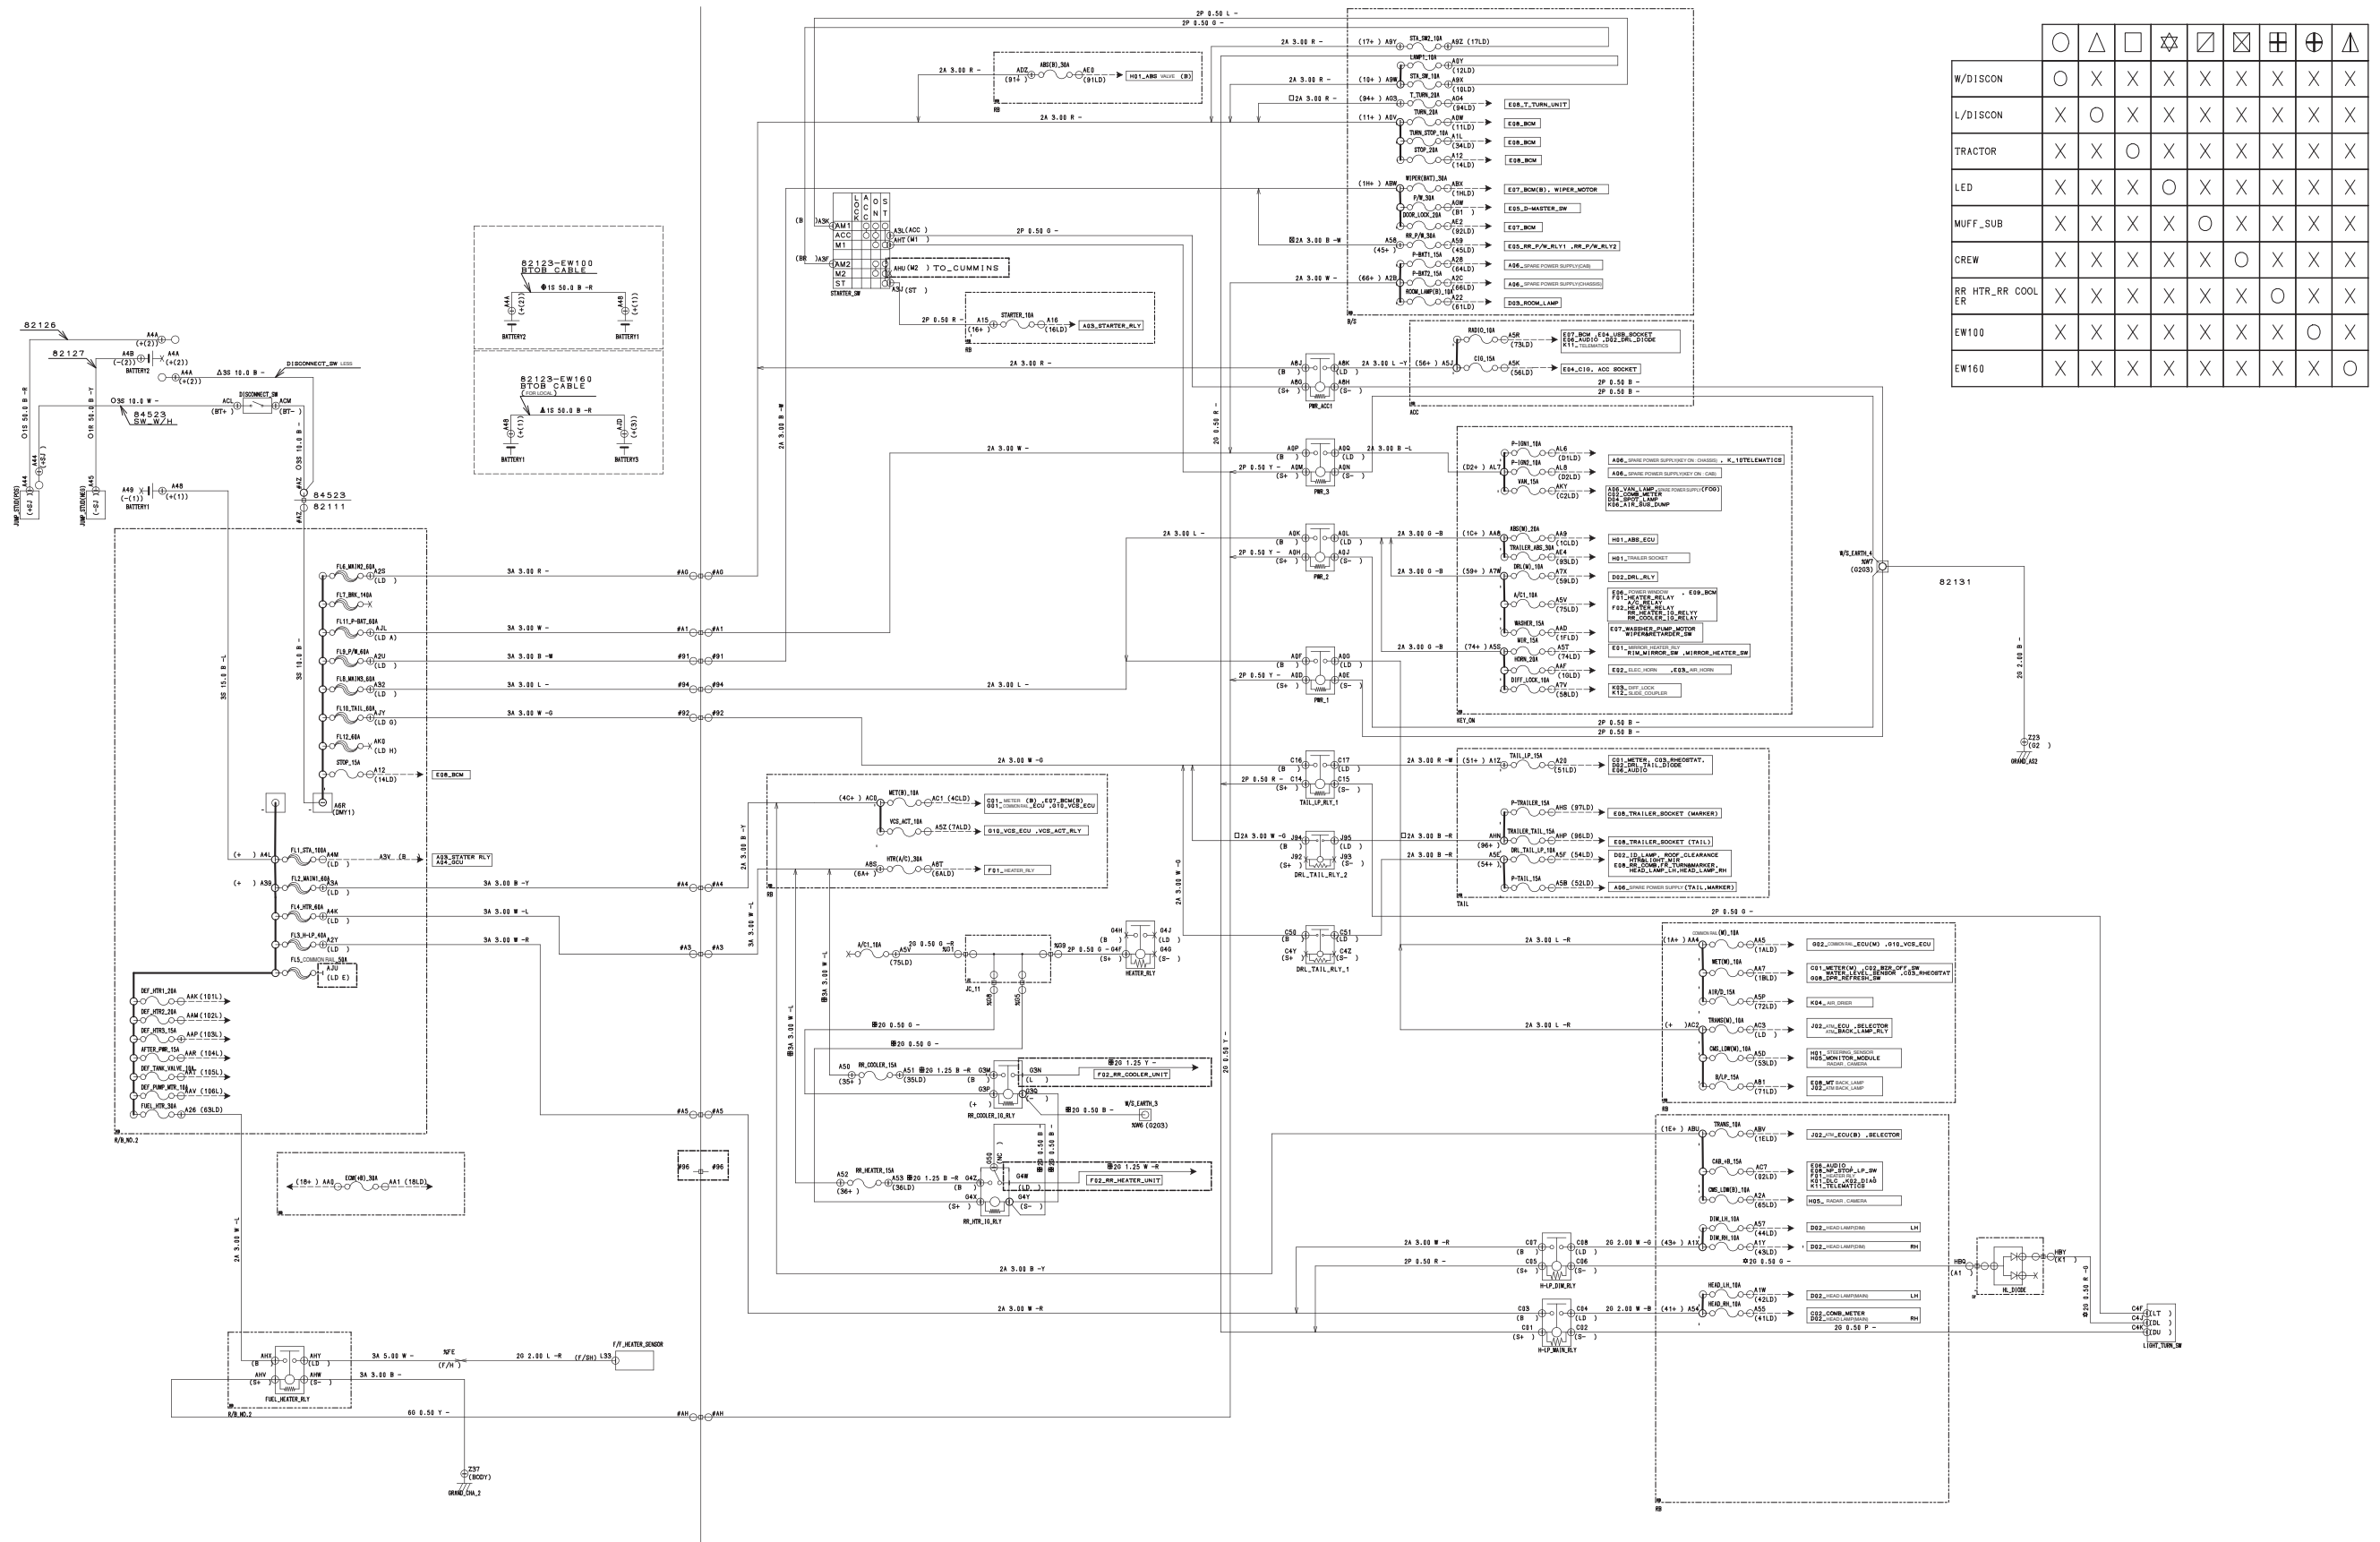
The Table of Circuit Name

No.	CIRCUIT NAME
1	POWER SUPPLY CIRCUIT XL SERIES
2	POWER SUPPLY CIRCUIT L SERIES
3	STARTING CIRCUIT
4	PRE-HEAT CIRCUIT
5	CHARGING CIRCUIT
6	SPARE POWER SUPPLY CIRCUIT & FOG LAMP CIRCUIT
7	LARGE CURRENT CABLE CIRCUIT L SERIES
8	LARGE CURRENT CABLE CIRCUIT XL SERIES
9	GRAND CIRCUIT_1
10	GRAND CIRCUIT_2
11	METER CIRCUIT_1
12	METER CIRCUIT_2
13	RHEOSTAT CIRCUIT
14	HALOGEN HEAD LAMP & DAY TIME RUNNING LAMP CIRCUIT
15	LED HEAD LAMP & DAY TIME RUNNING LAMP CIRCUIT
16	ROOM LAMP CIRCUIT
17	WORKING LAMP CIRCUIT
18	HEATING MIRROR CIRCUIT & REMOTE CONTROL MIRROR CIRCUIT
19	ELECTRICAL HORN CIRCUIT
20	AIR HORN CIRCUIT
21	CIGARETTE LIGHTER & ACC. SOCKET CIRCUIT
22	POWER WINDOW CIRCUIT
23	AUDIO CIRCUIT
24	BODY CONTROL CIRCUIT_POWER D/L & KEY LESS ENTRY
25	BODY CONTROL CIRCUIT_CAB
26	BODY CONTROL CIRCUIT_CHASSIS
27	MANUAL AIR CONDITIONER CIRCUIT
28	REAR COOLER & REAR HEATER CIRCUIT
29	CUMMINS ENGINE ECU & ECM CIRCUIT
30	AFTERTRATMENT SYSTEM CIRCUIT
31	COMMON RAIL CIRCUIT_ATM EXHAUST BRAKE
32	COMMON RAIL CIRCUIT_FS CURISE
33	VEHICLE CONTROL ECU CIRCUIT_1
34	VEHICLE CONTROL ECU CIRCUIT_2
35	VEHICLE CONTROL ECU CIRCUIT_3
36	VEHICLE CONTROL ECU CIRCUIT_4 (EXHAUST BRAKE)
37	ABS CIRCUIT_1
38	ABS CIRCUIT_2
39	ABS CIRCUIT_3 (HYDRAULIC BRAKE Ver. E)
40	HYDRAULIC BRAKE SYSTEM CIRCUIT
41	CMS, ACC & LDW CIRCUIT
42	ALLISON 2200/2500 TRANS BASIC CIRCUIT
43	ALLISON 3000RDS TRANS BASIC CIRCUIT
44	DIAGNOSIS CIRCUIT
45	DIAG' CONNECTOR CIRCUIT
46	DIFF LOCK CONTROL CIRCUIT
47	AIR DRIER CIRCUIT
48	AIR SUS DUMP CIRCUIT
49	VEHICLE CAN CIRCUIT
50	TELEMATICS CIRCUIT
51	SLIDE COUPLER LOCK CIRCUIT
52	FUEL FILTER SYSTEM CIRCUIT

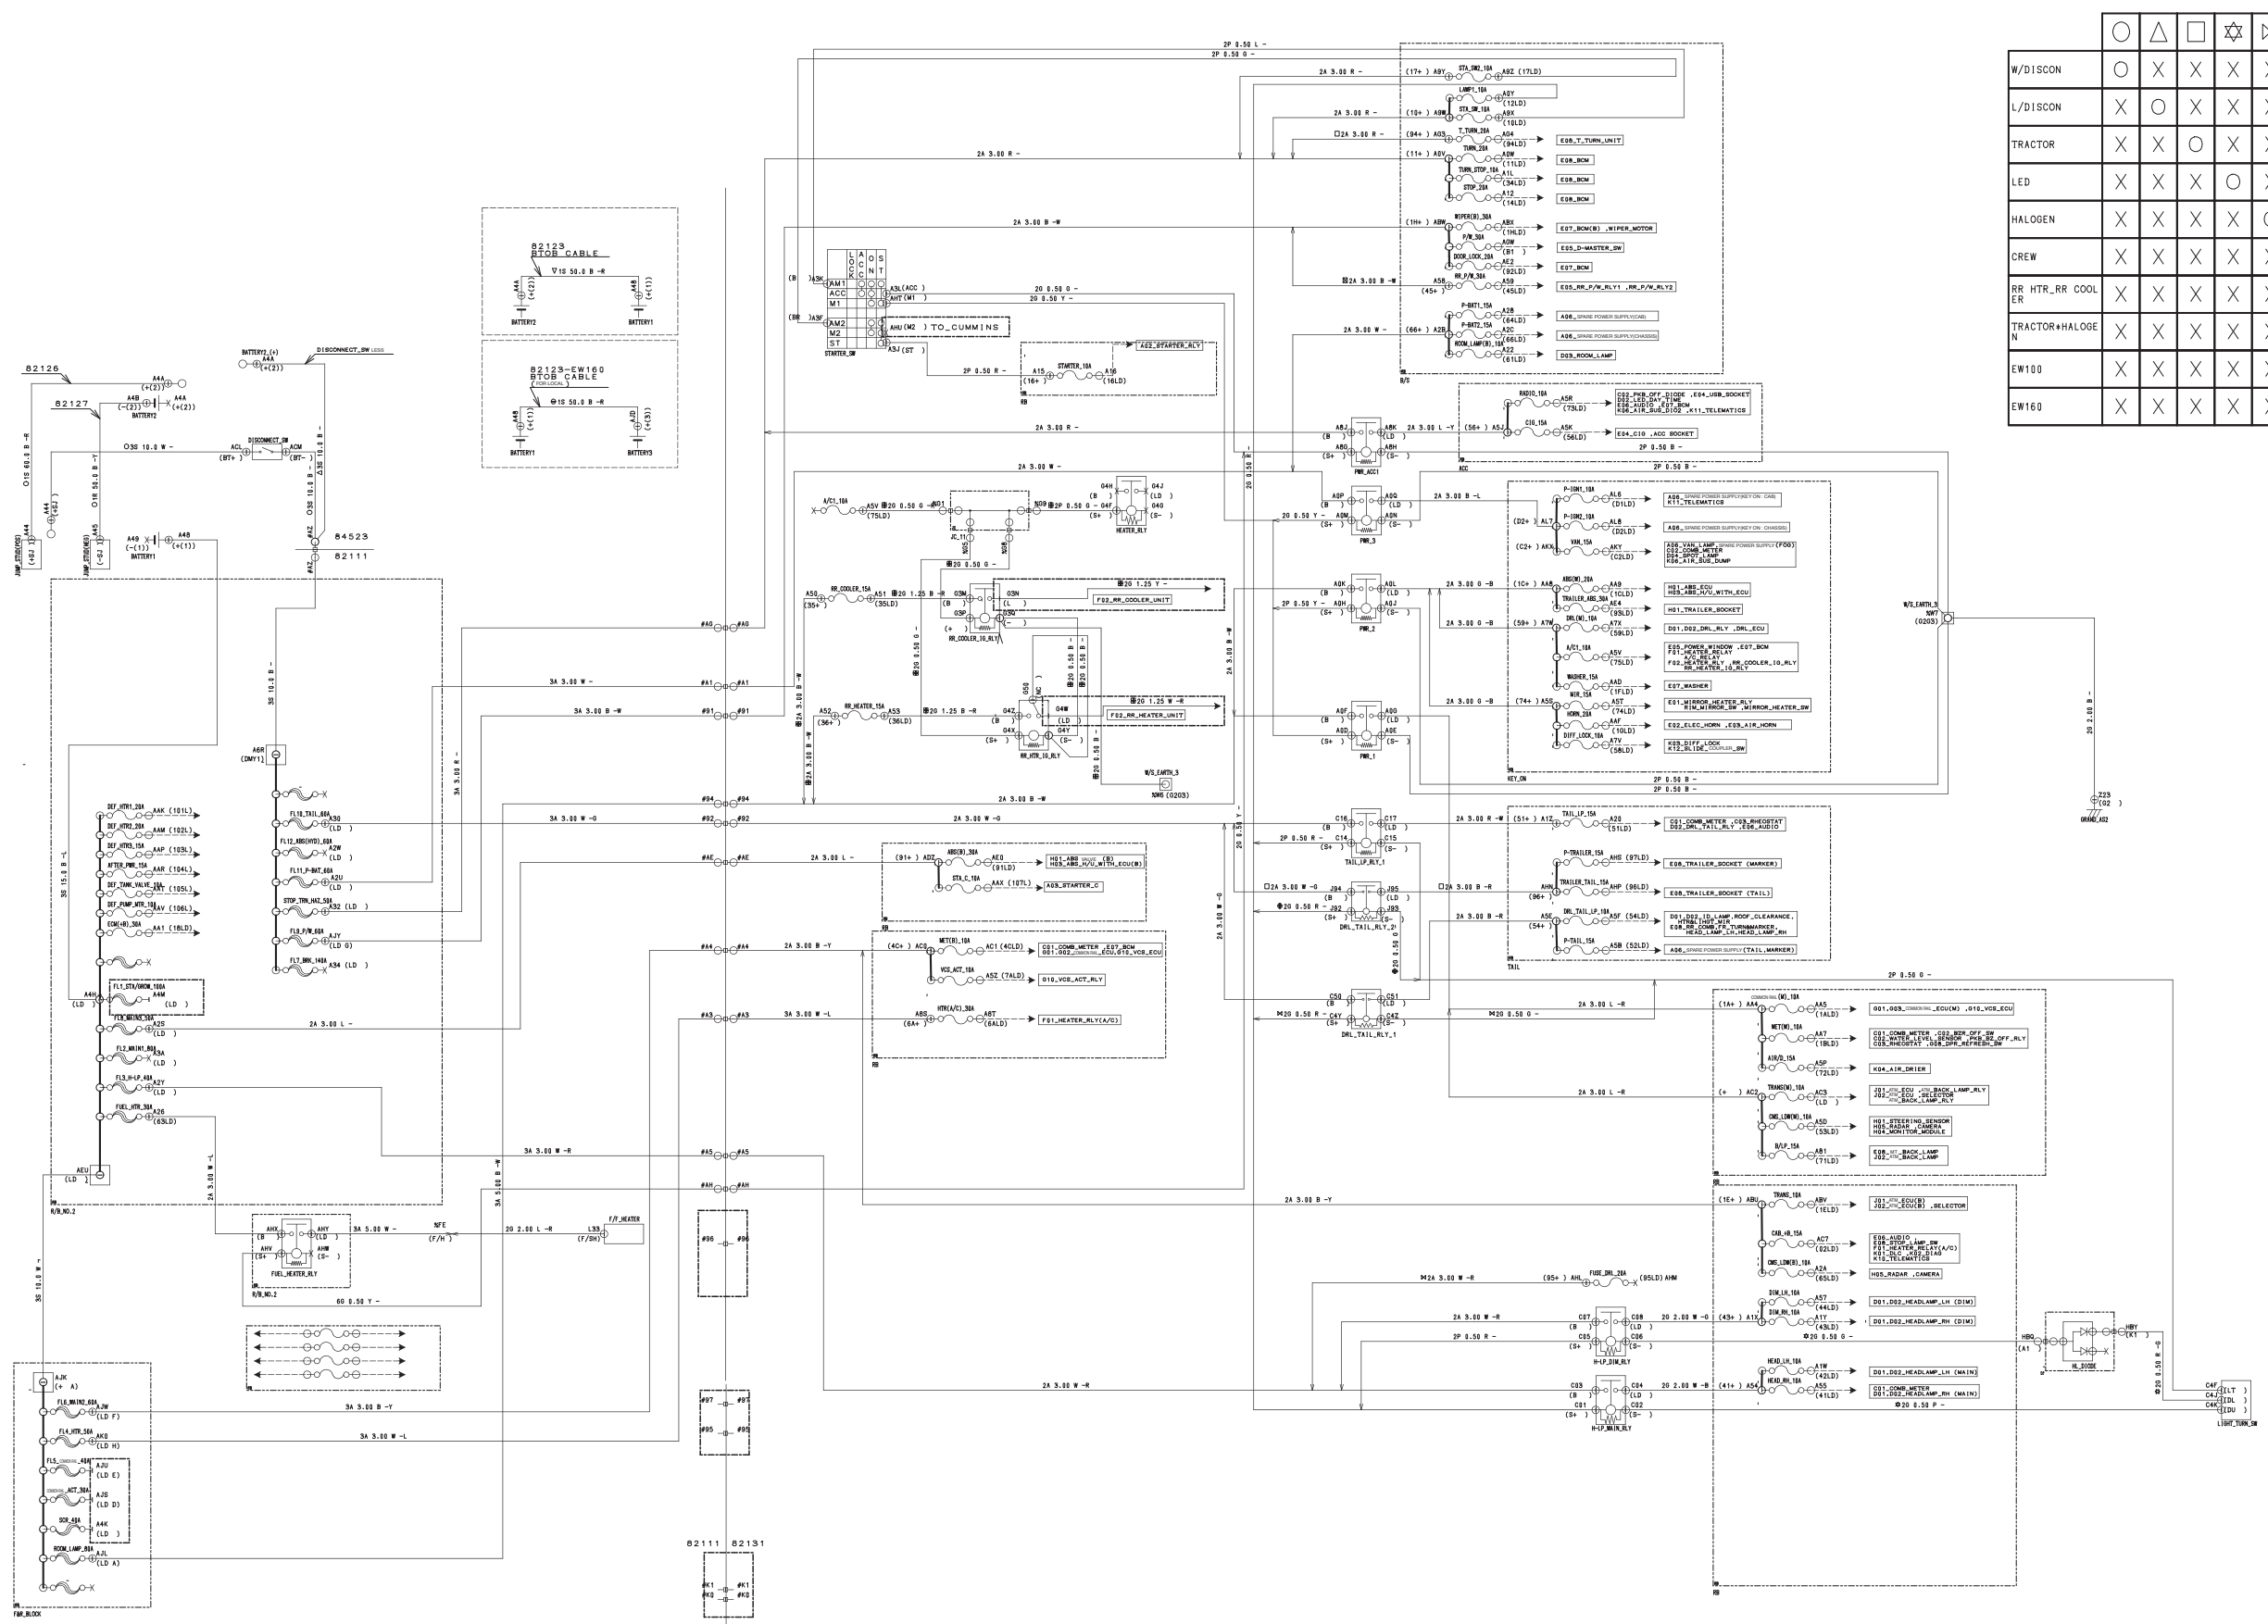
[NOTE] 1) There are all the specifications included options.

2) When you use these electrical diagrams, please understand the vehicle specifications.

## 1. POWER SUPPLY CIRCUIT XL SERIES

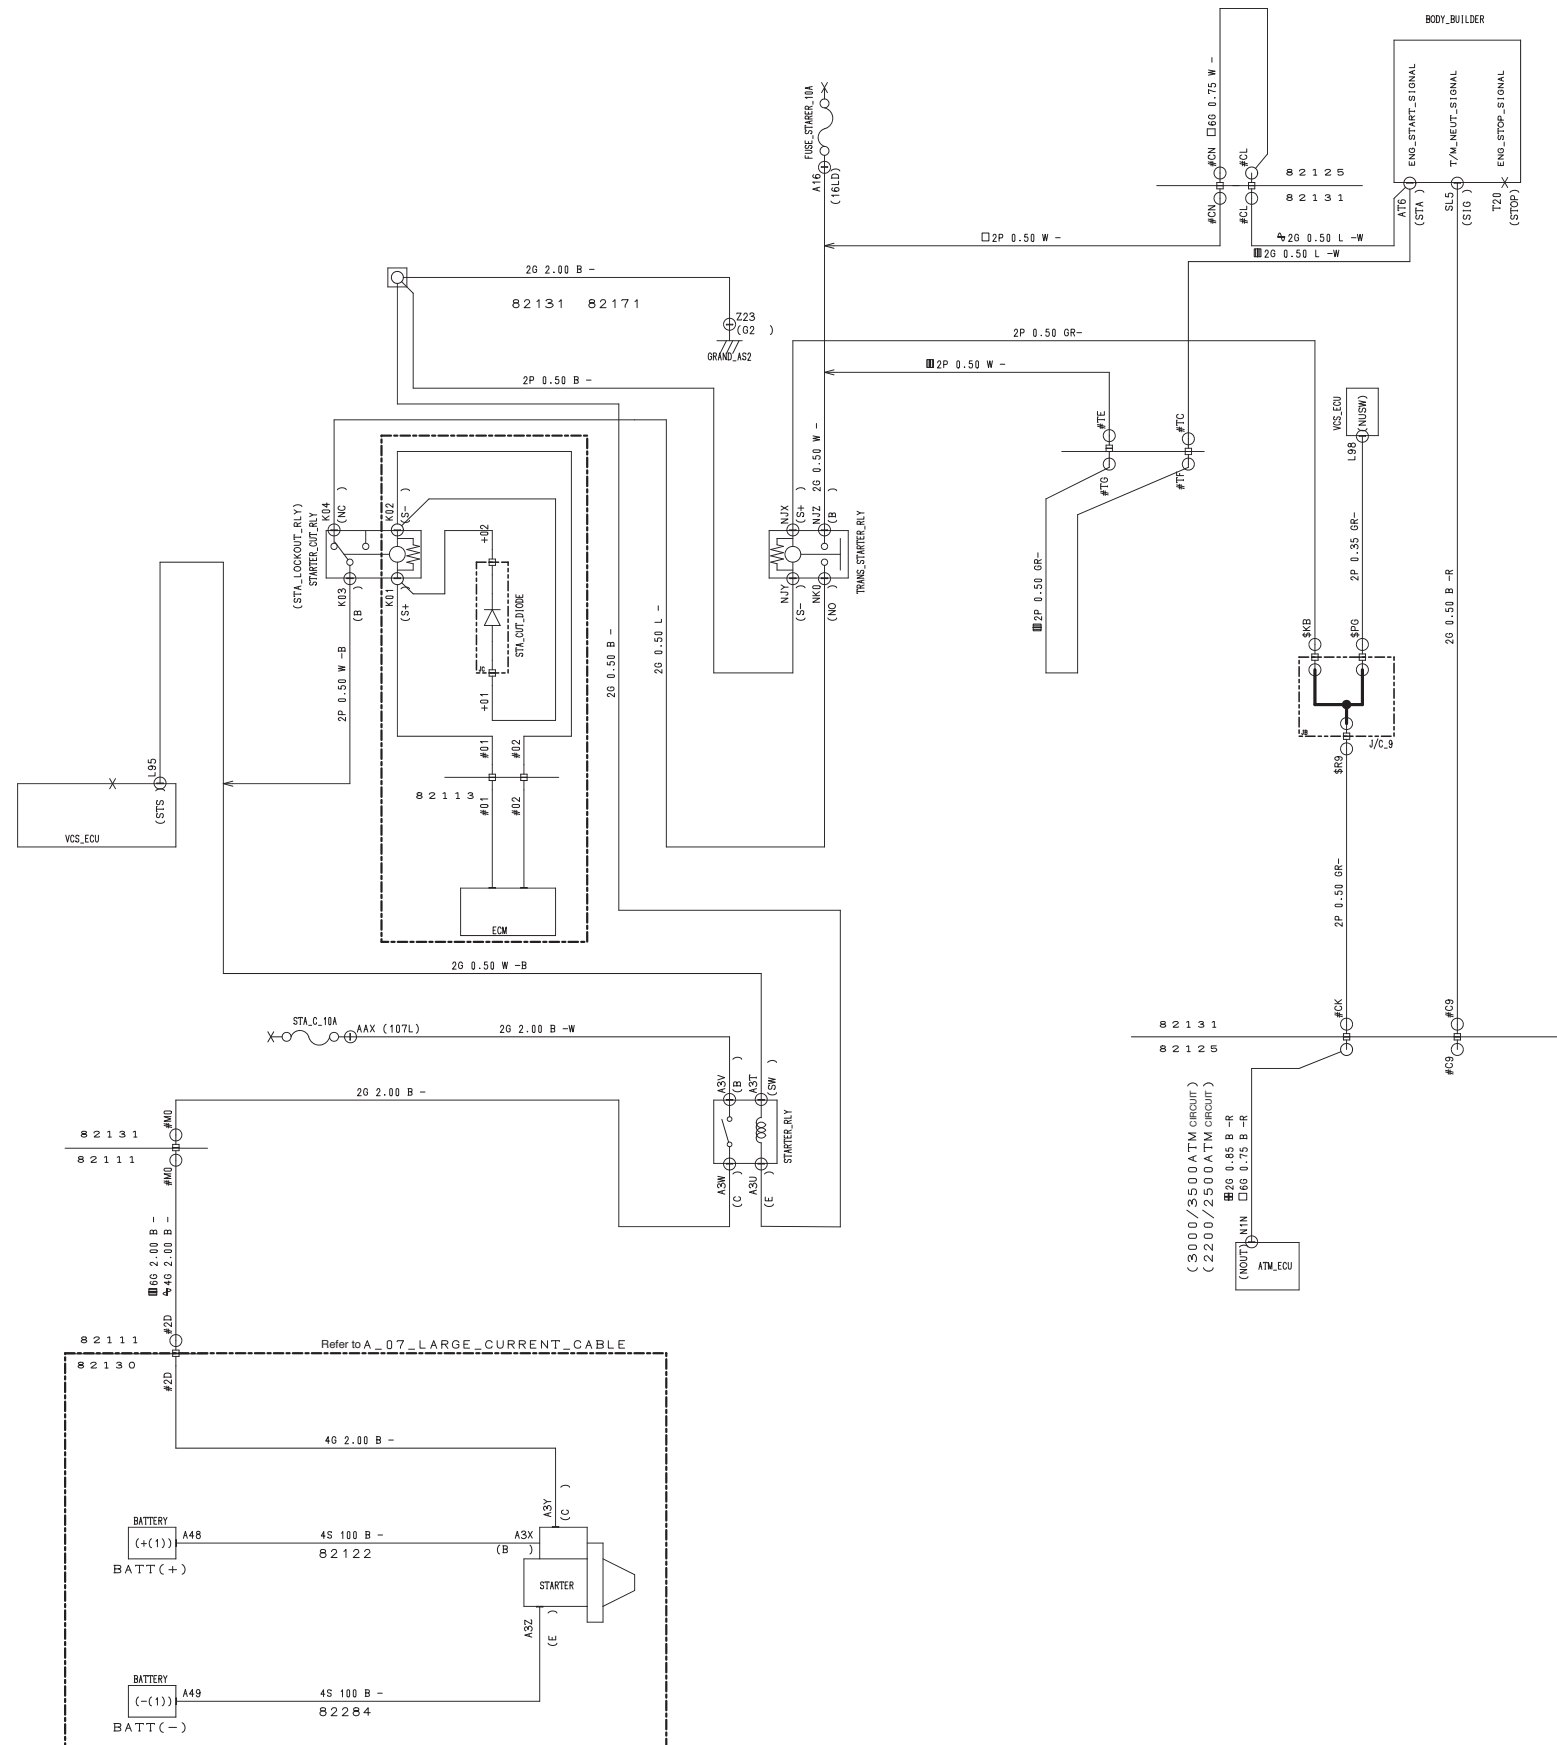












2. POWER SUPPLY CIRCUIT L SERIES



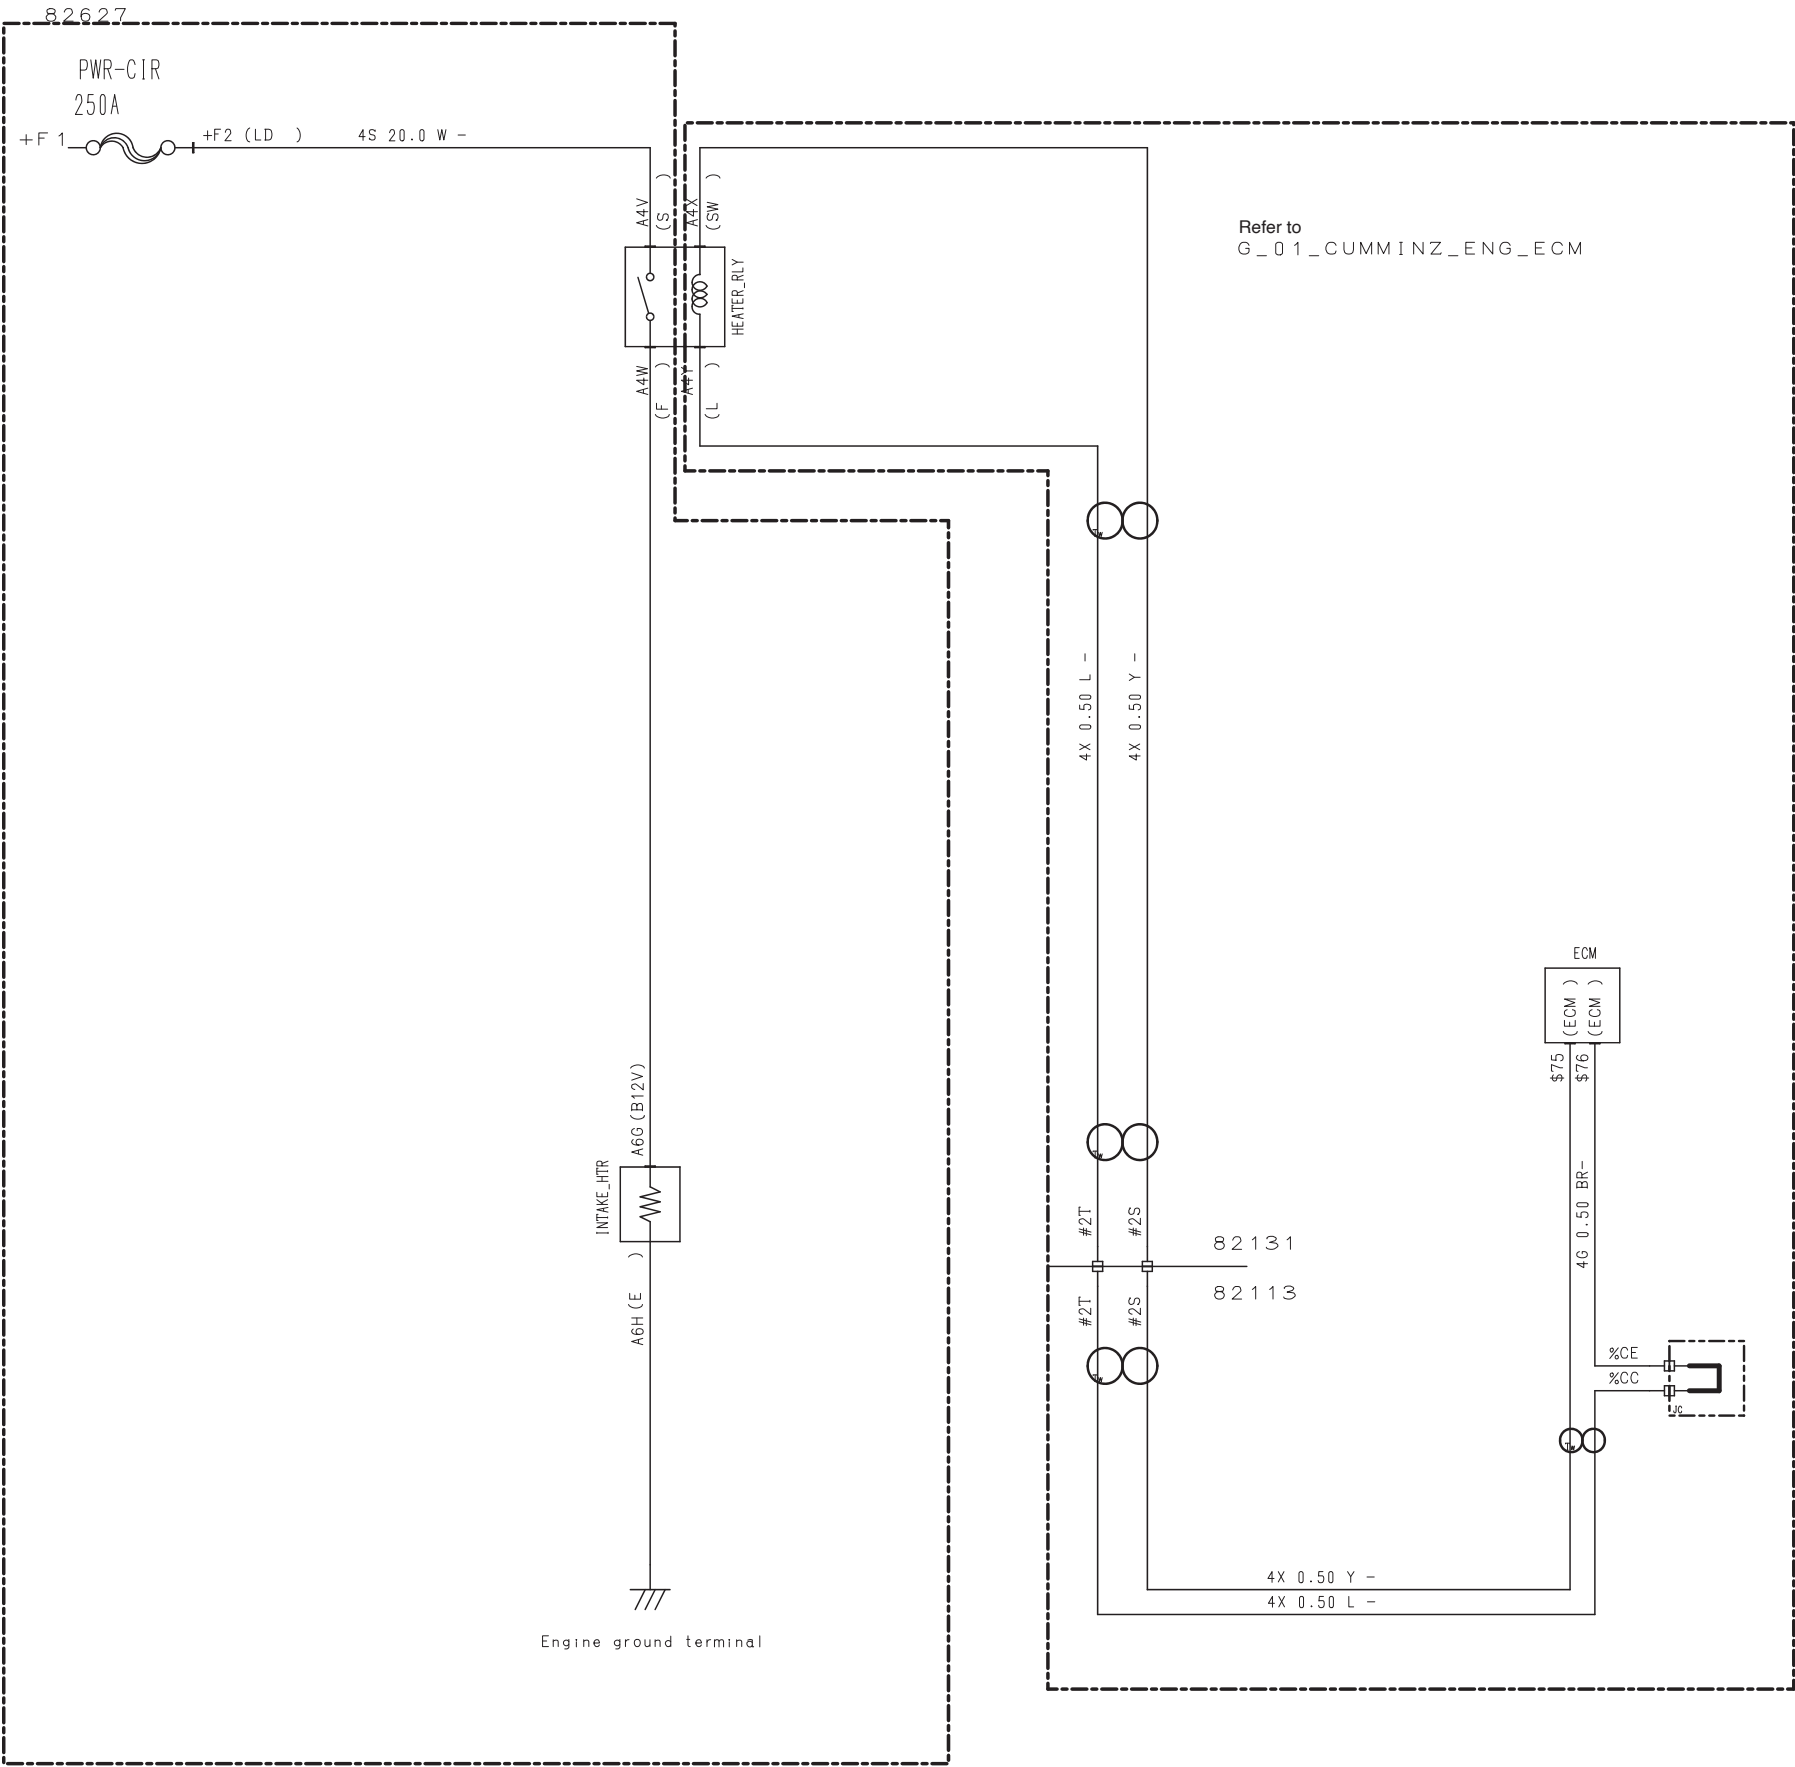
	○	△	□	☆	⊠	⊞	⊟	▽	⊖
W/DISCON	○	×	×	×	×	×	×	×	×
L/DISCON	×	○	×	×	×	×	×	×	×
TRACTOR	×	×	○	×	×	×	×	×	×
LED	×	×	×	○	×	×	×	×	×
HALOGEN	×	×	×	×	○	×	×	×	×
CREW	×	×	×	×	×	○	×	×	×
RR HTR,RR COOL ER	×	×	×	×	×	×	○	×	×
TRACTOR+HALOGE N	×	×	×	×	×	×	×	○	×
EW100	×	×	×	×	×	×	×	×	○
EW160	×	×	×	×	×	×	×	×	○

### 3. STARTING CIRCUIT

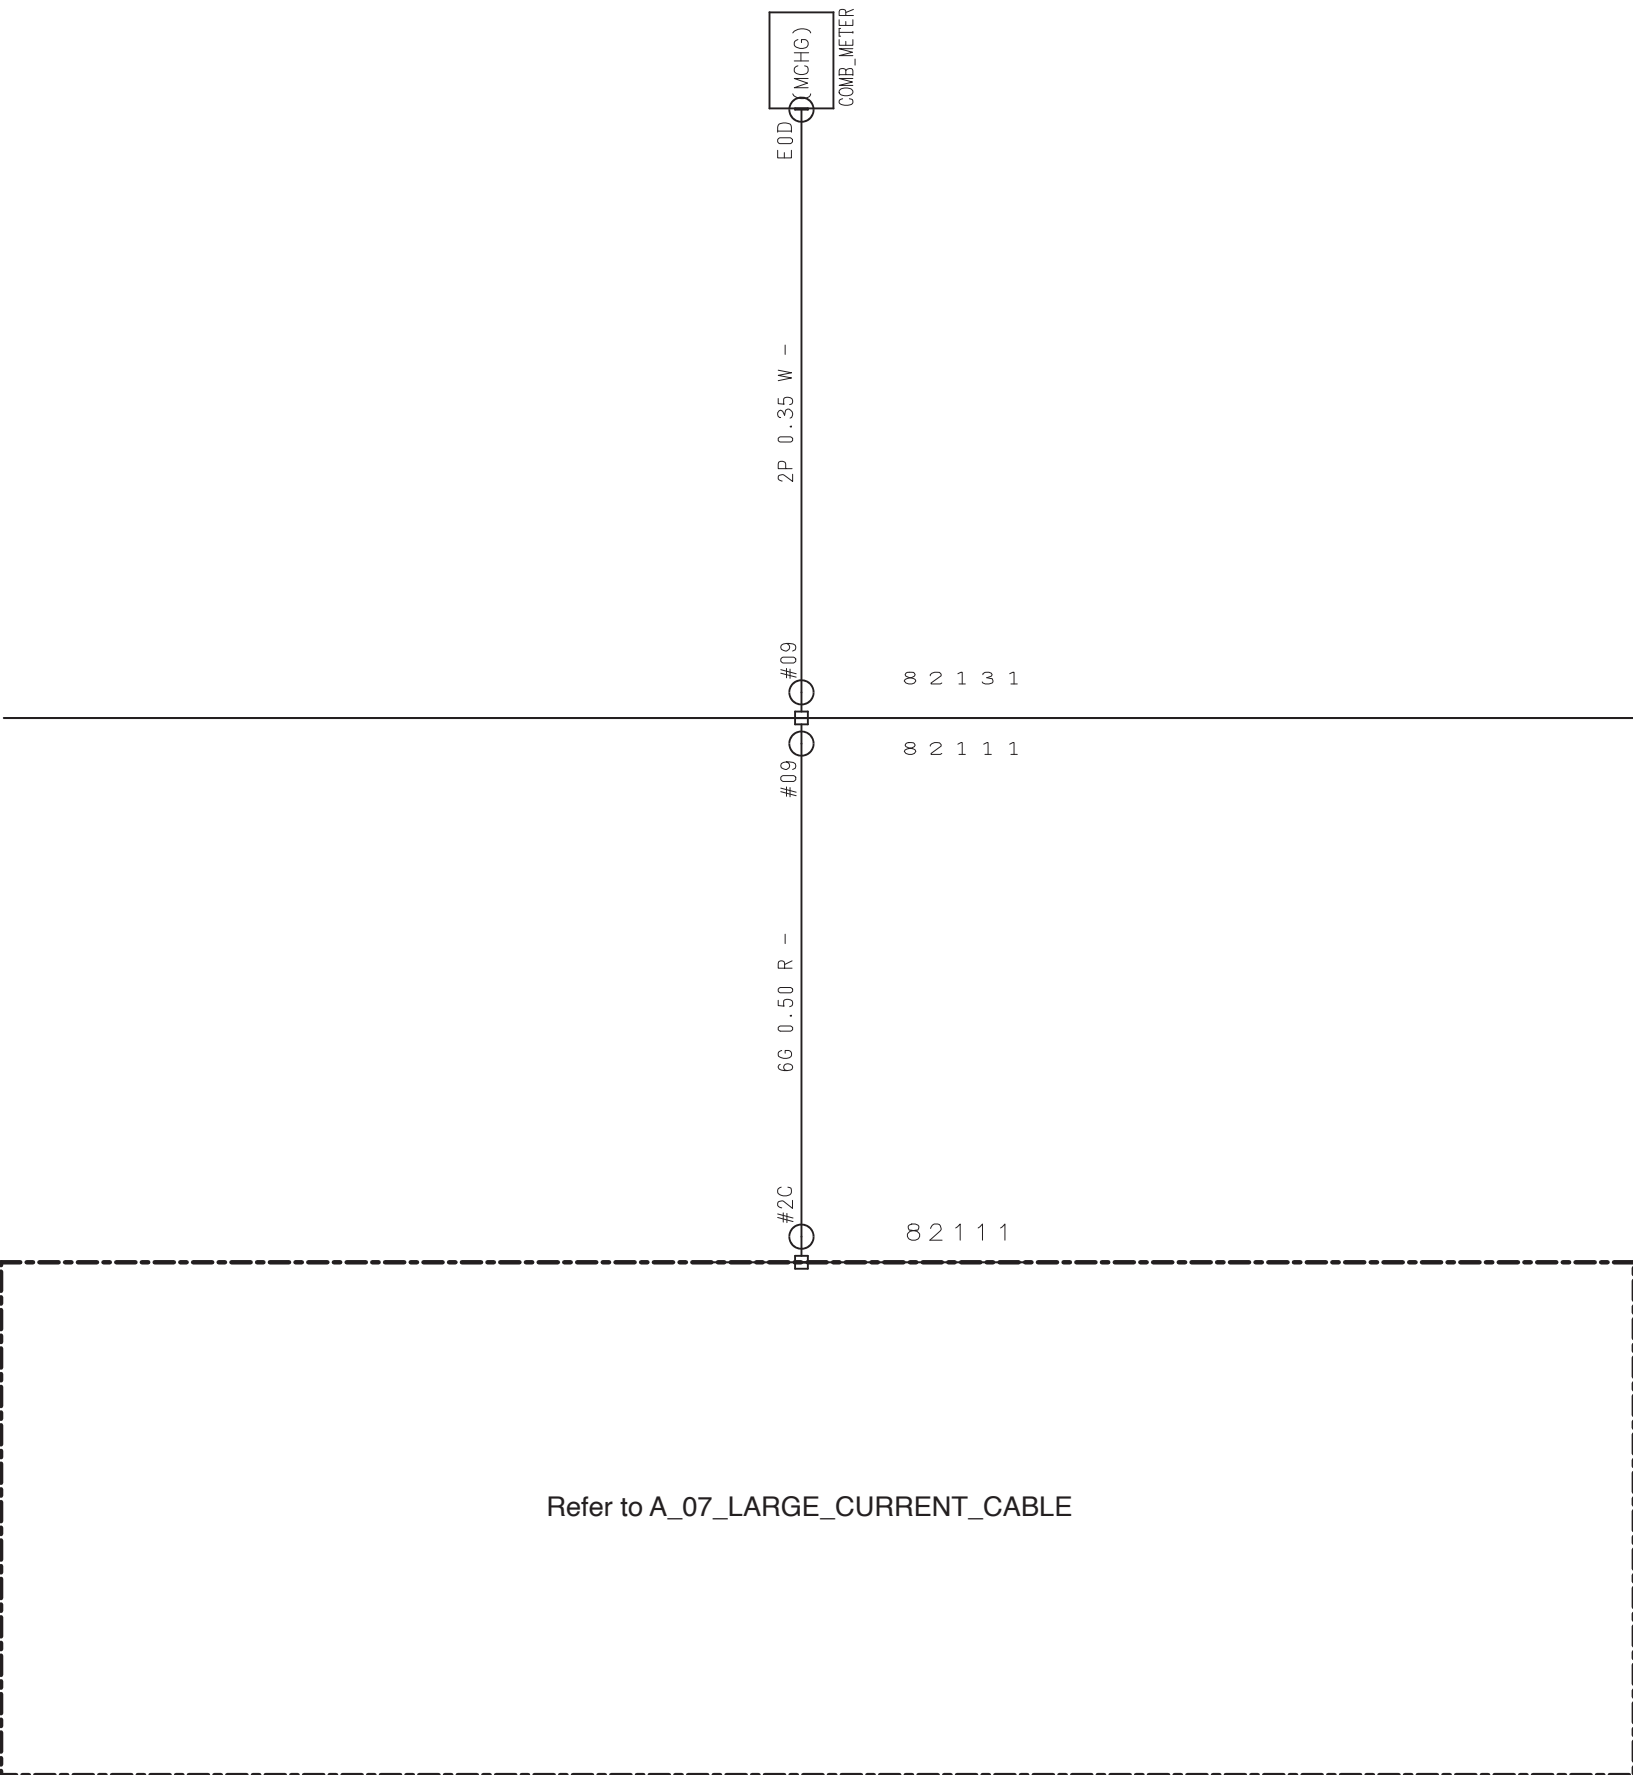


					
L SERIES		X	X	X	X
XL SERIES	X		X	X	X
BODY_BUILDER	X	X		X	X
XL SERIES	X	X	X		X
L SERIES	X	X	X	X	

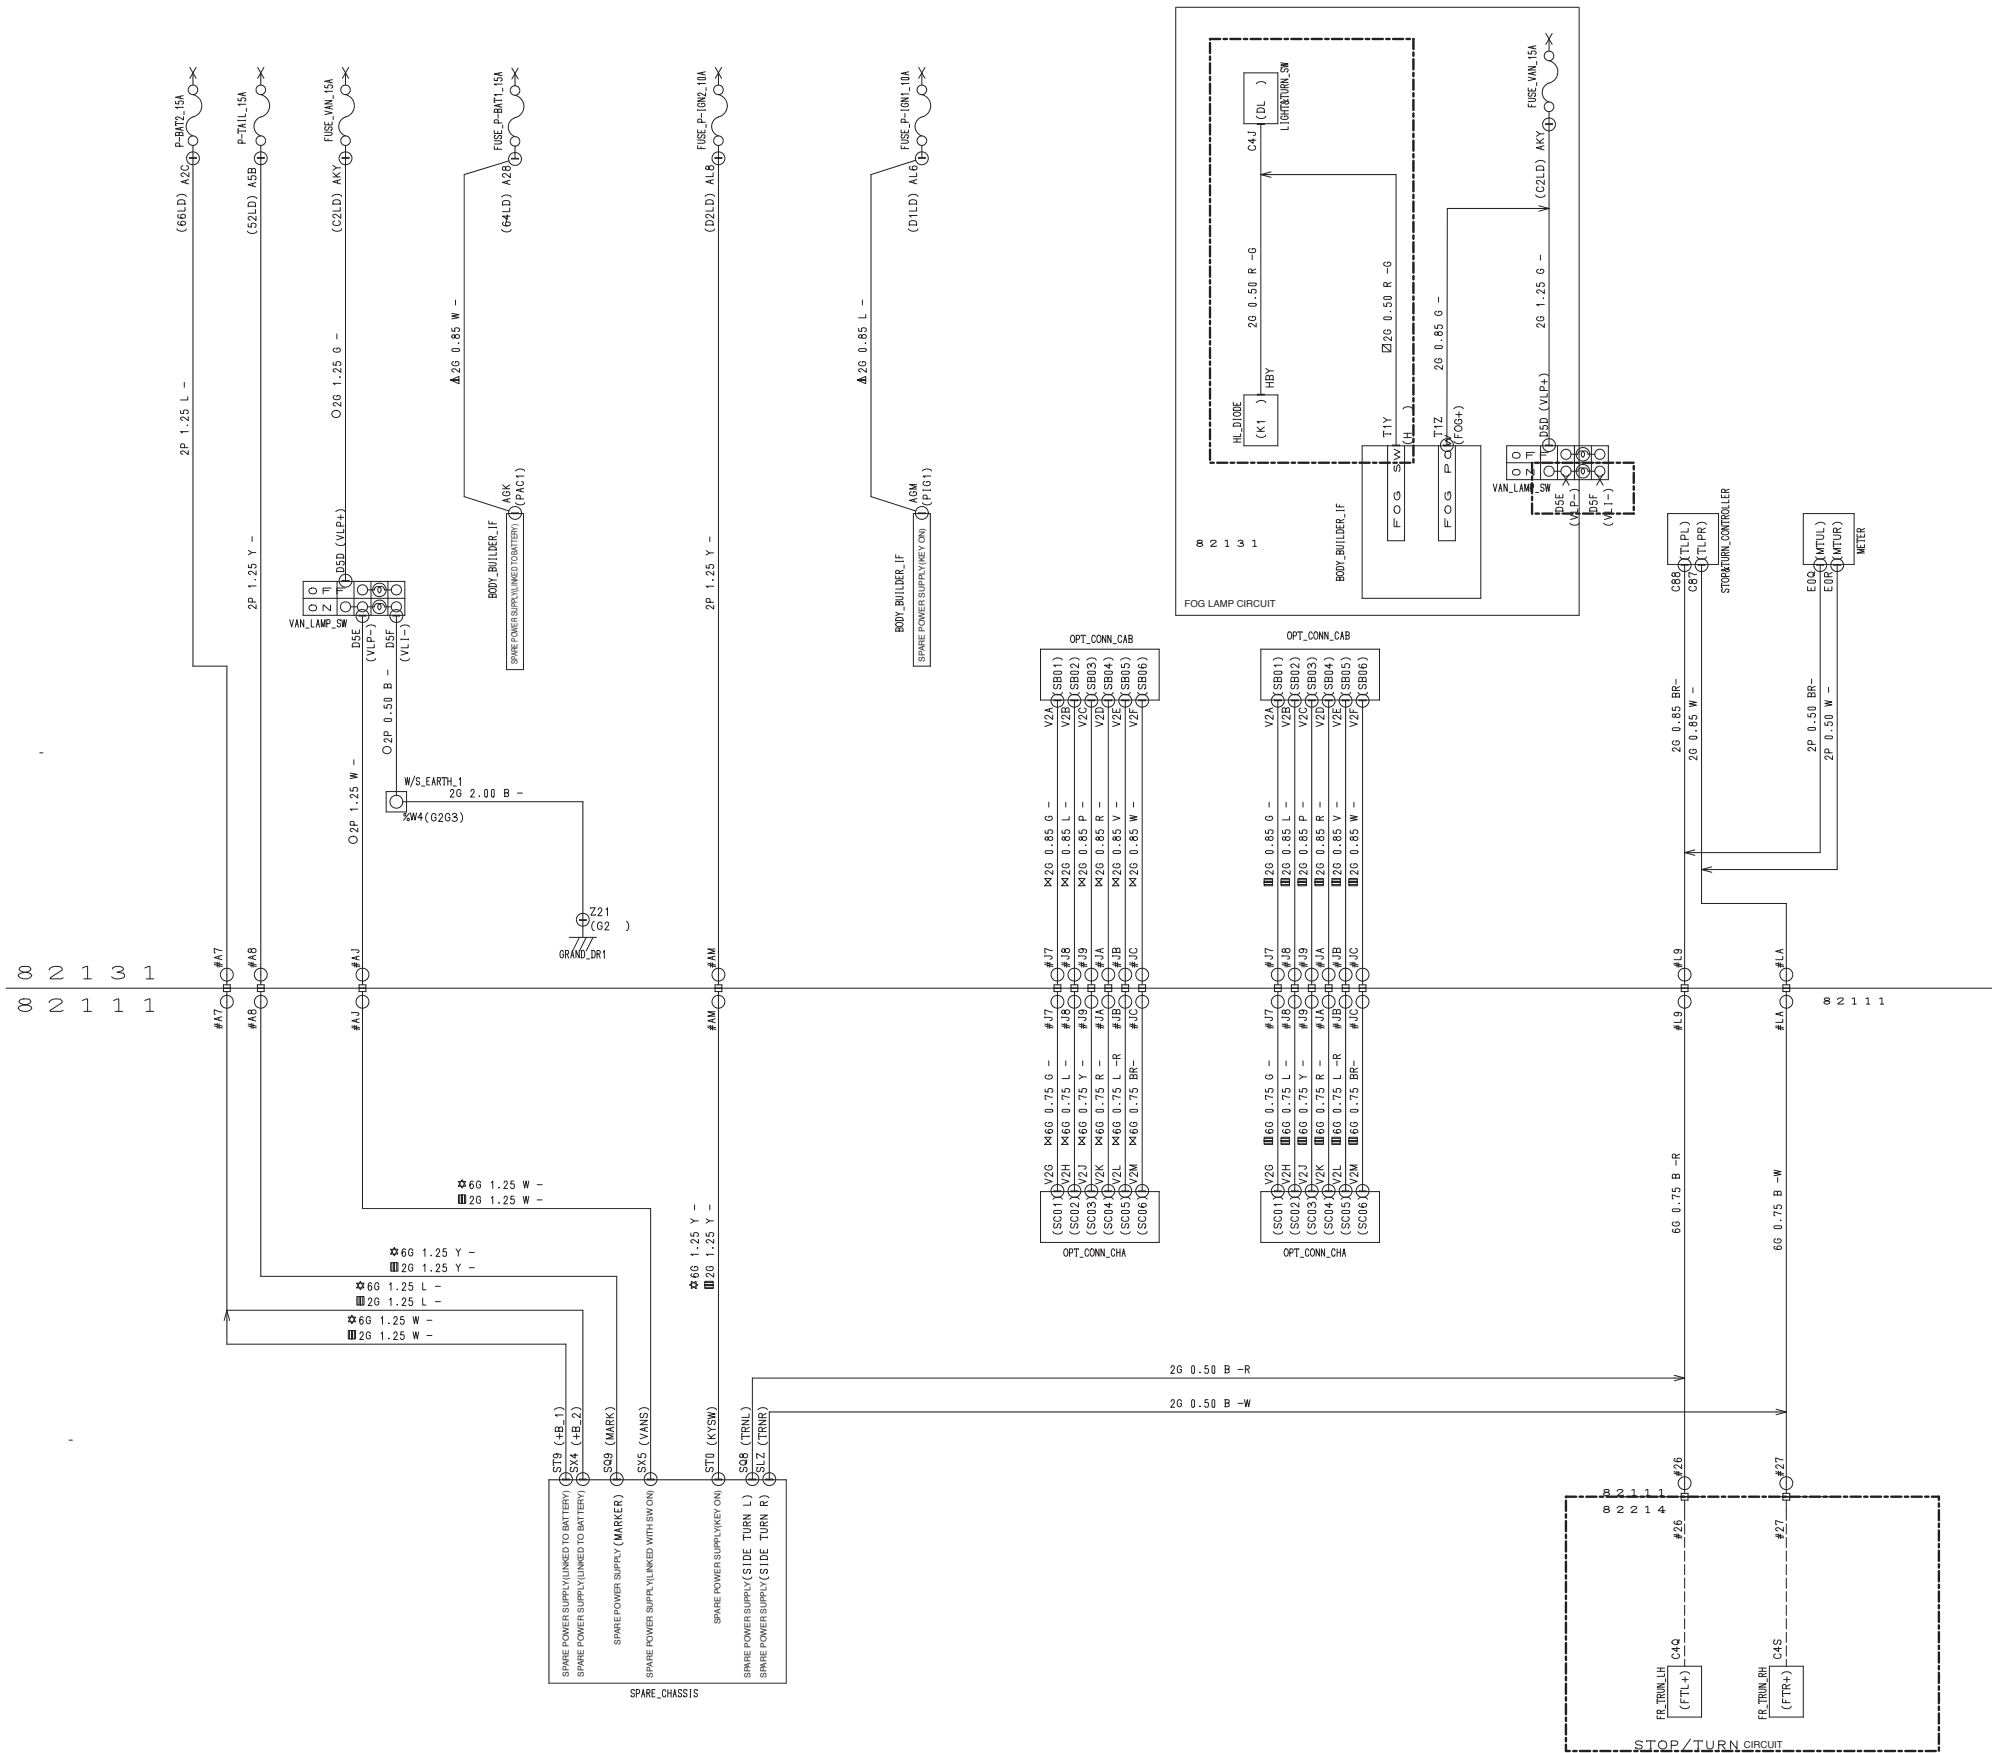
4. PRE-HEAT CIRCUIT



5. CHARGING CIRCUIT



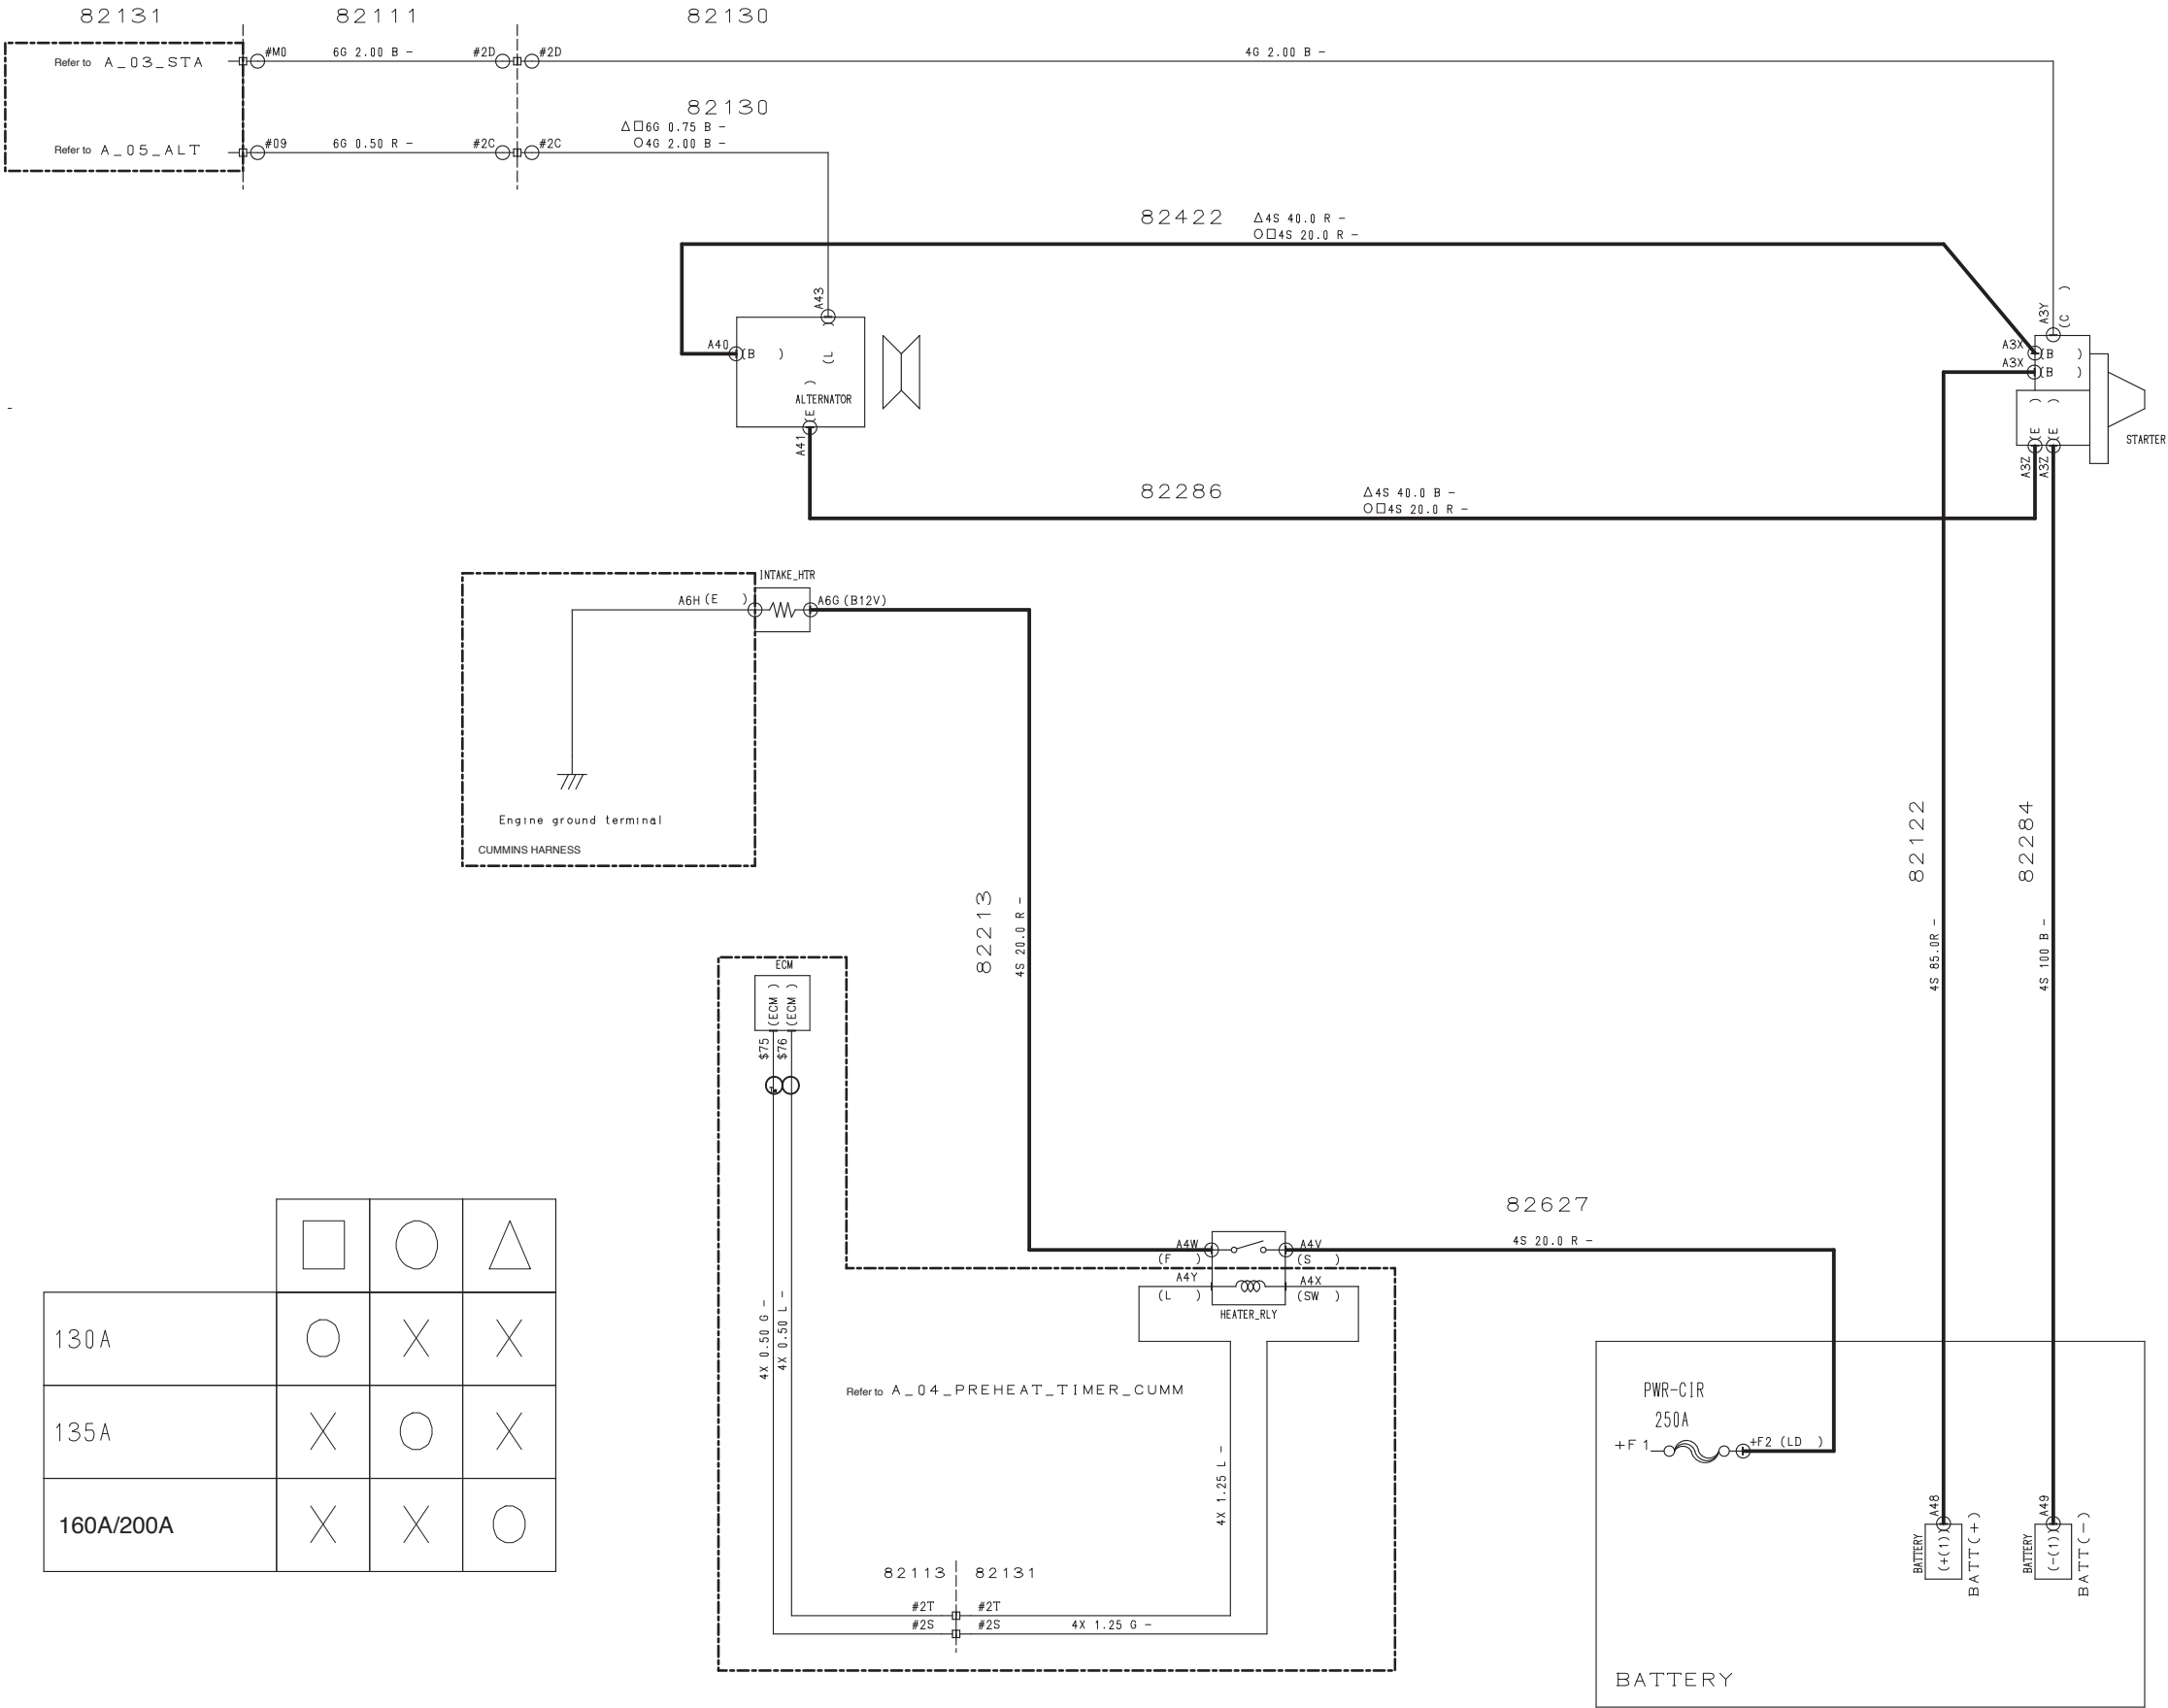
6. SPARE POWER SUPPLY CIRCUIT & FOG LAMP CIRCUIT



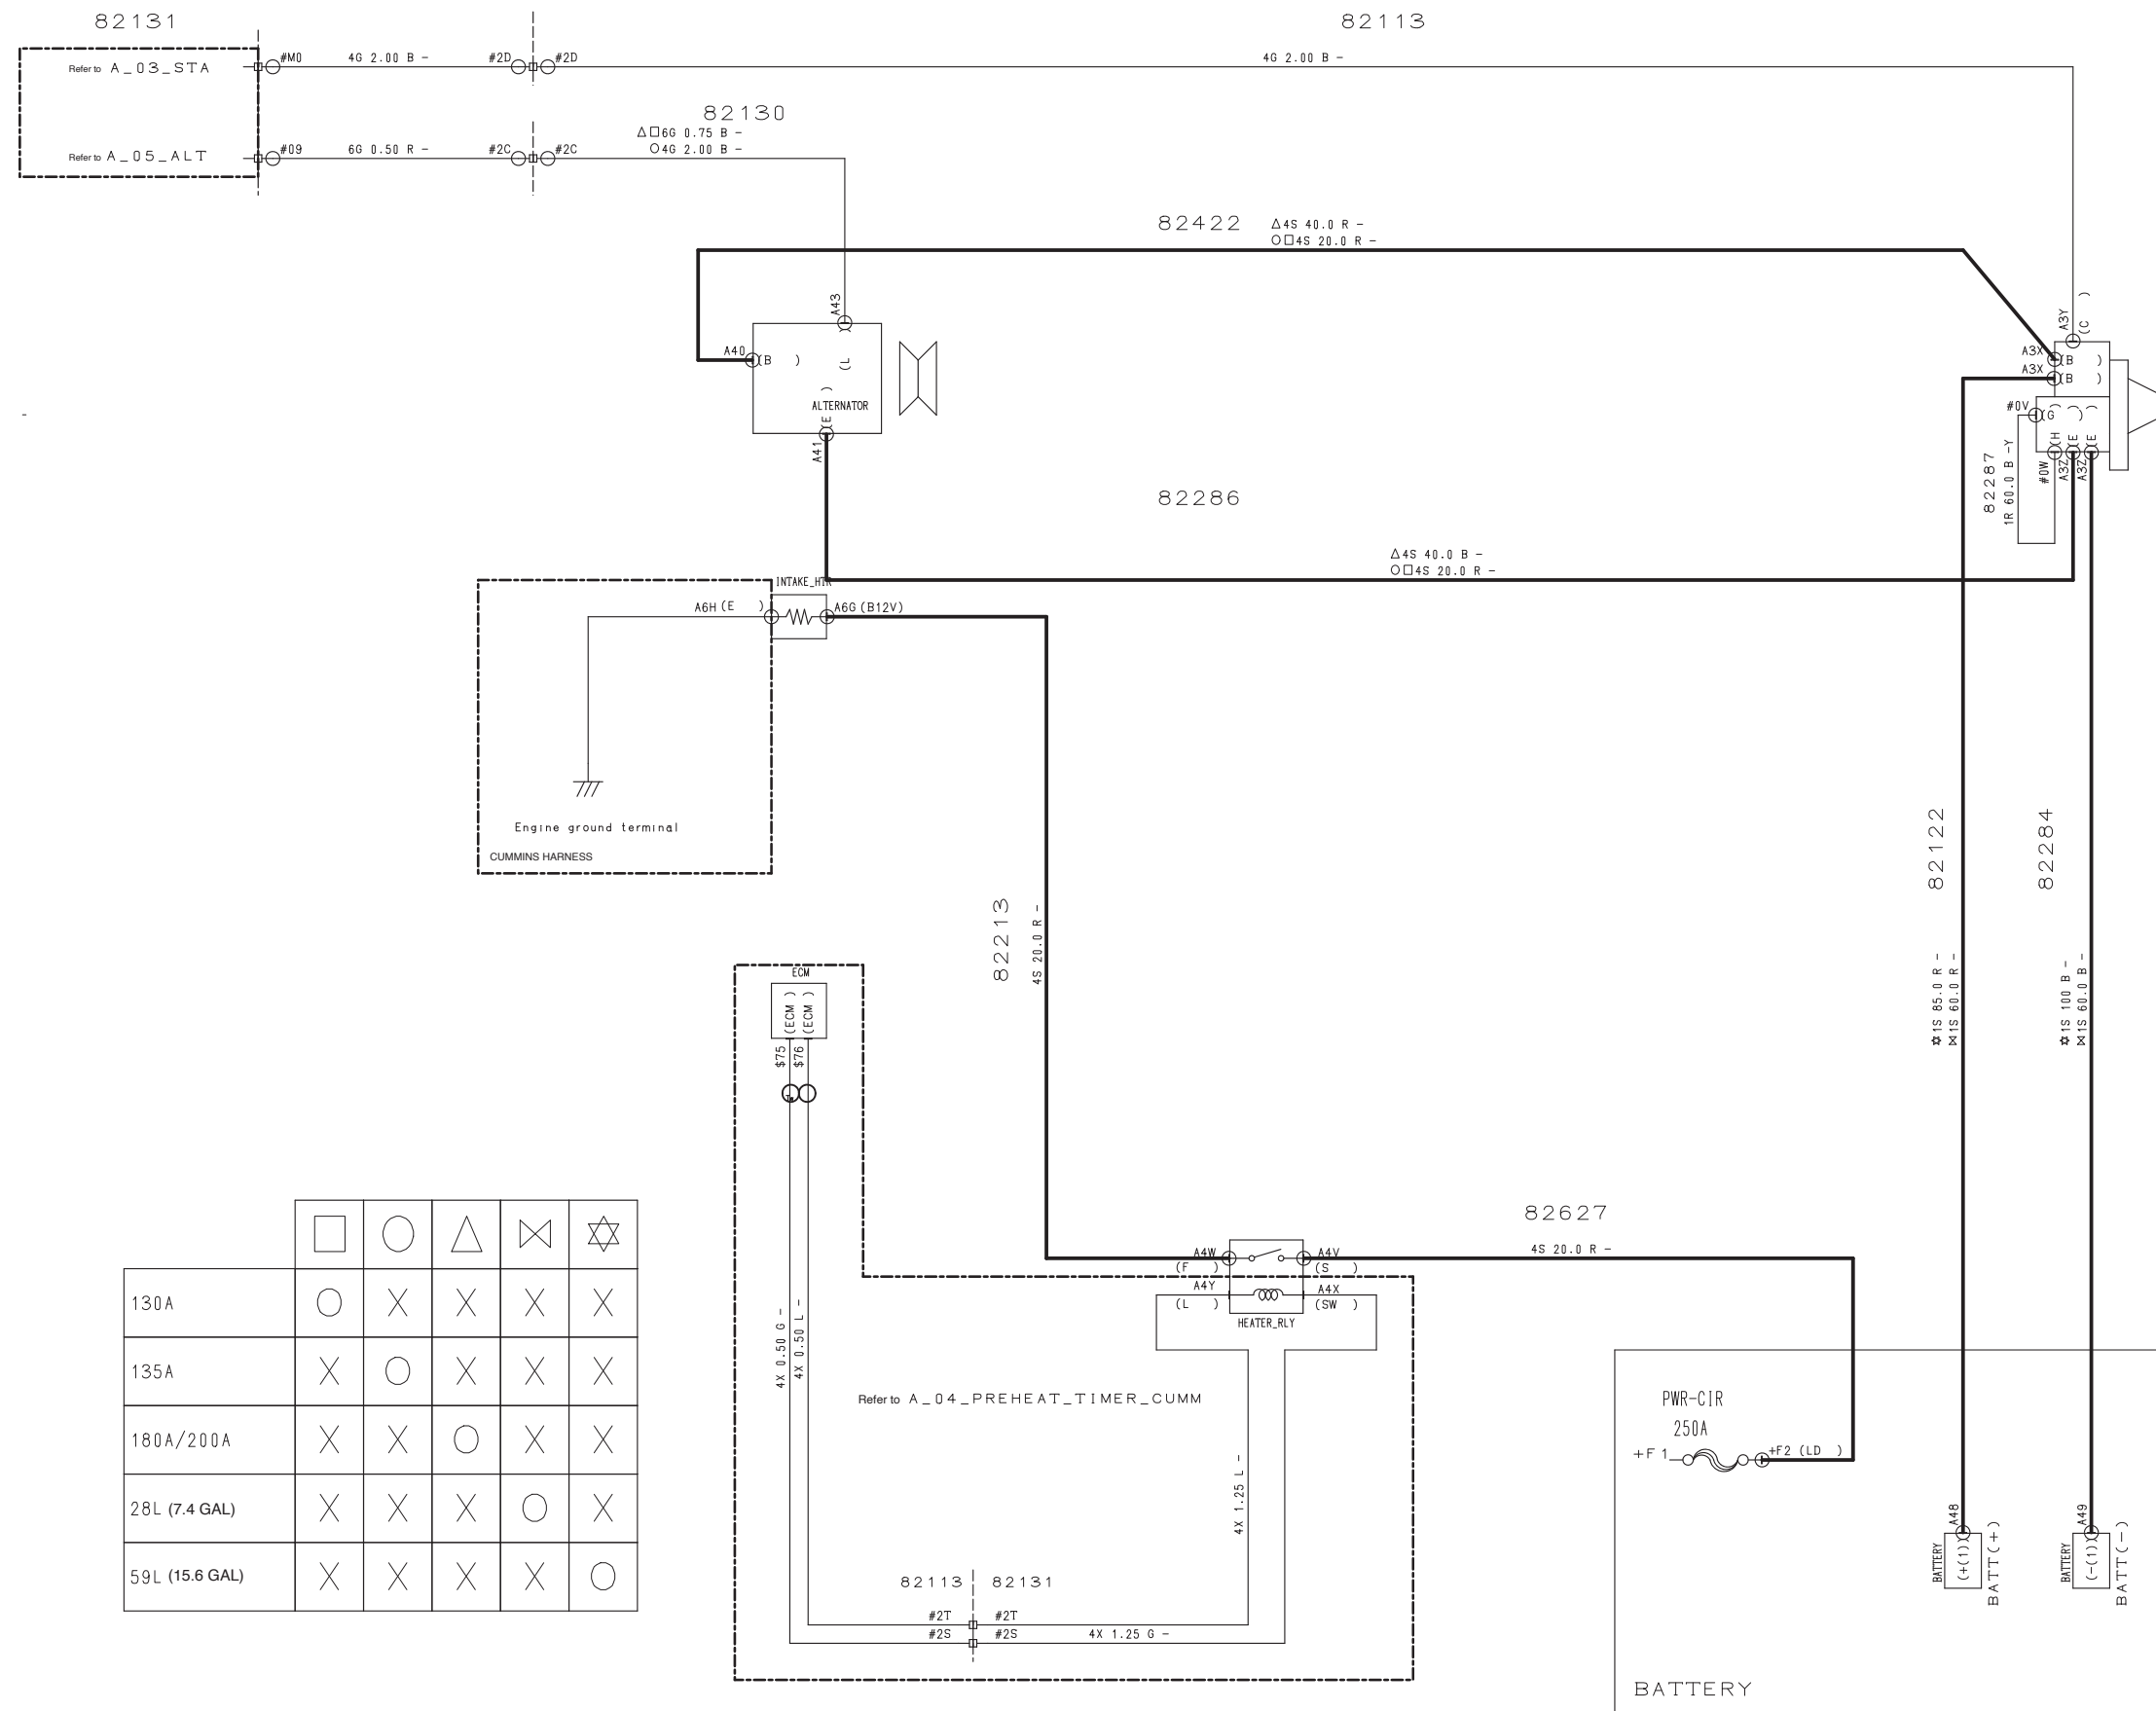
VAN_LP					
XL SERIES+TRACK					
XL SERIES					
L SERIES					
TRACK					
ALL MODEL					



7. LARGE CURRENT CABLE CIRCUIT L SERIES



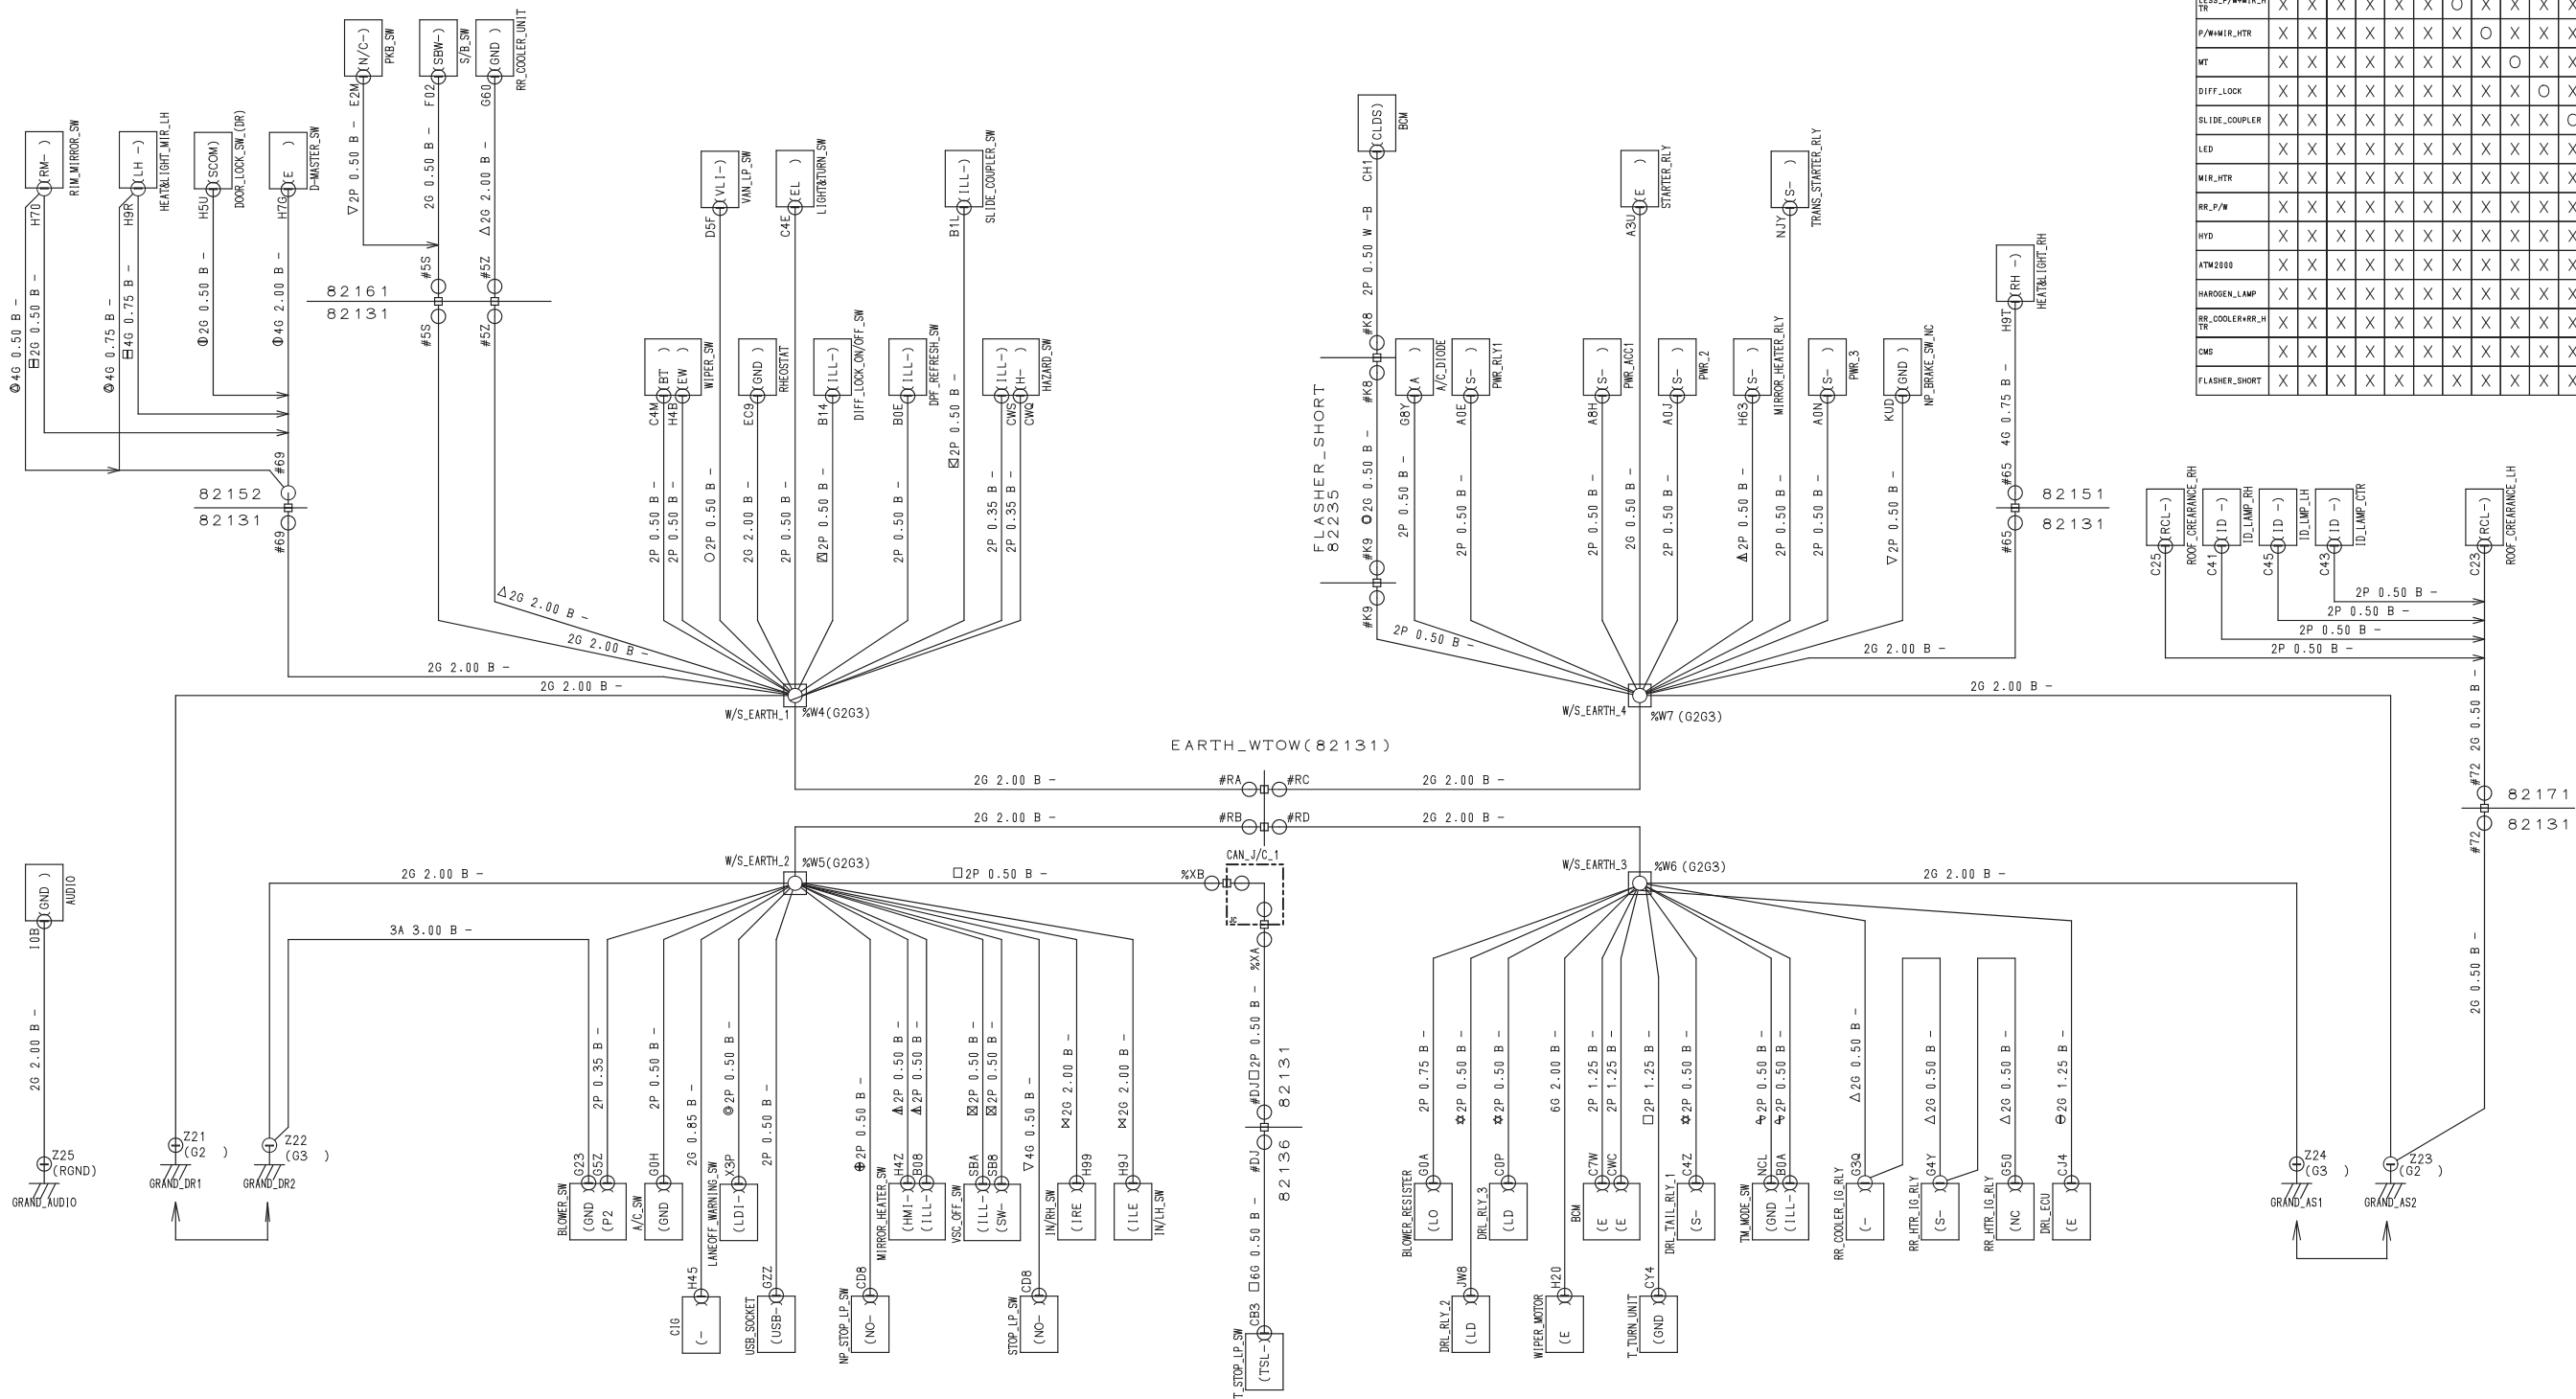
## 8. LARGE CURRENT CABLE CIRCUIT XL SERIES



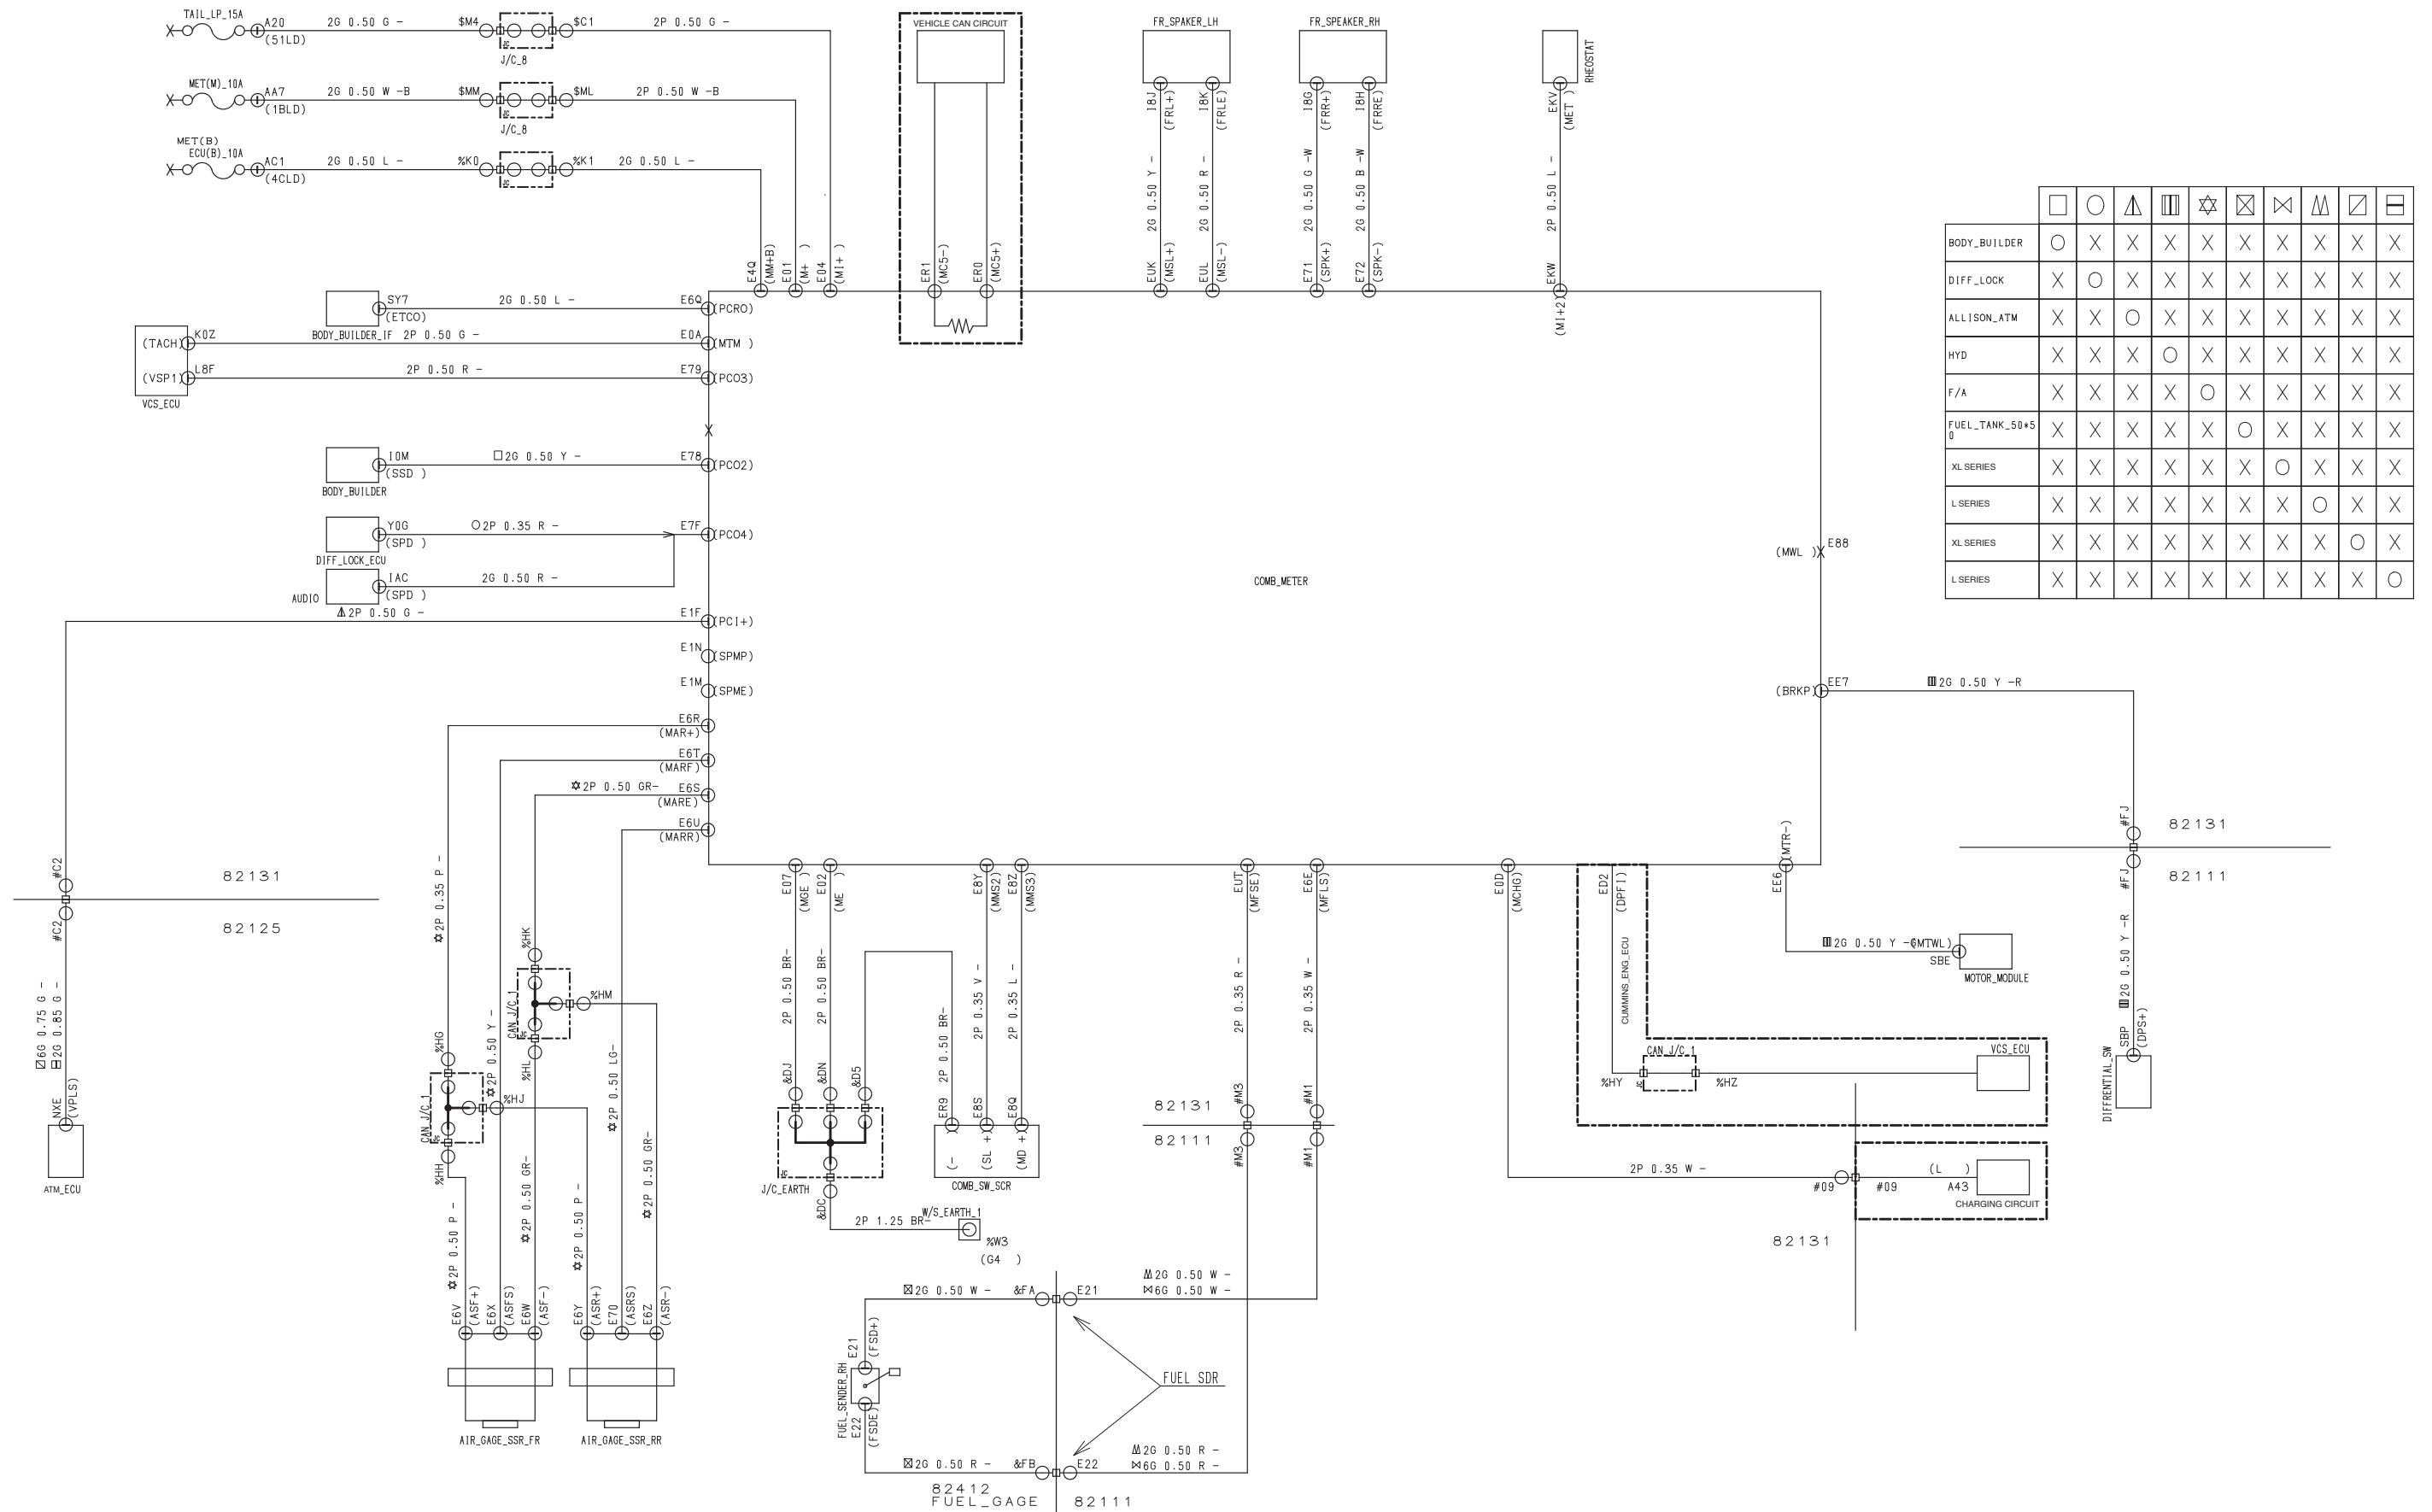
G 4 | G 3 ( G 5 )



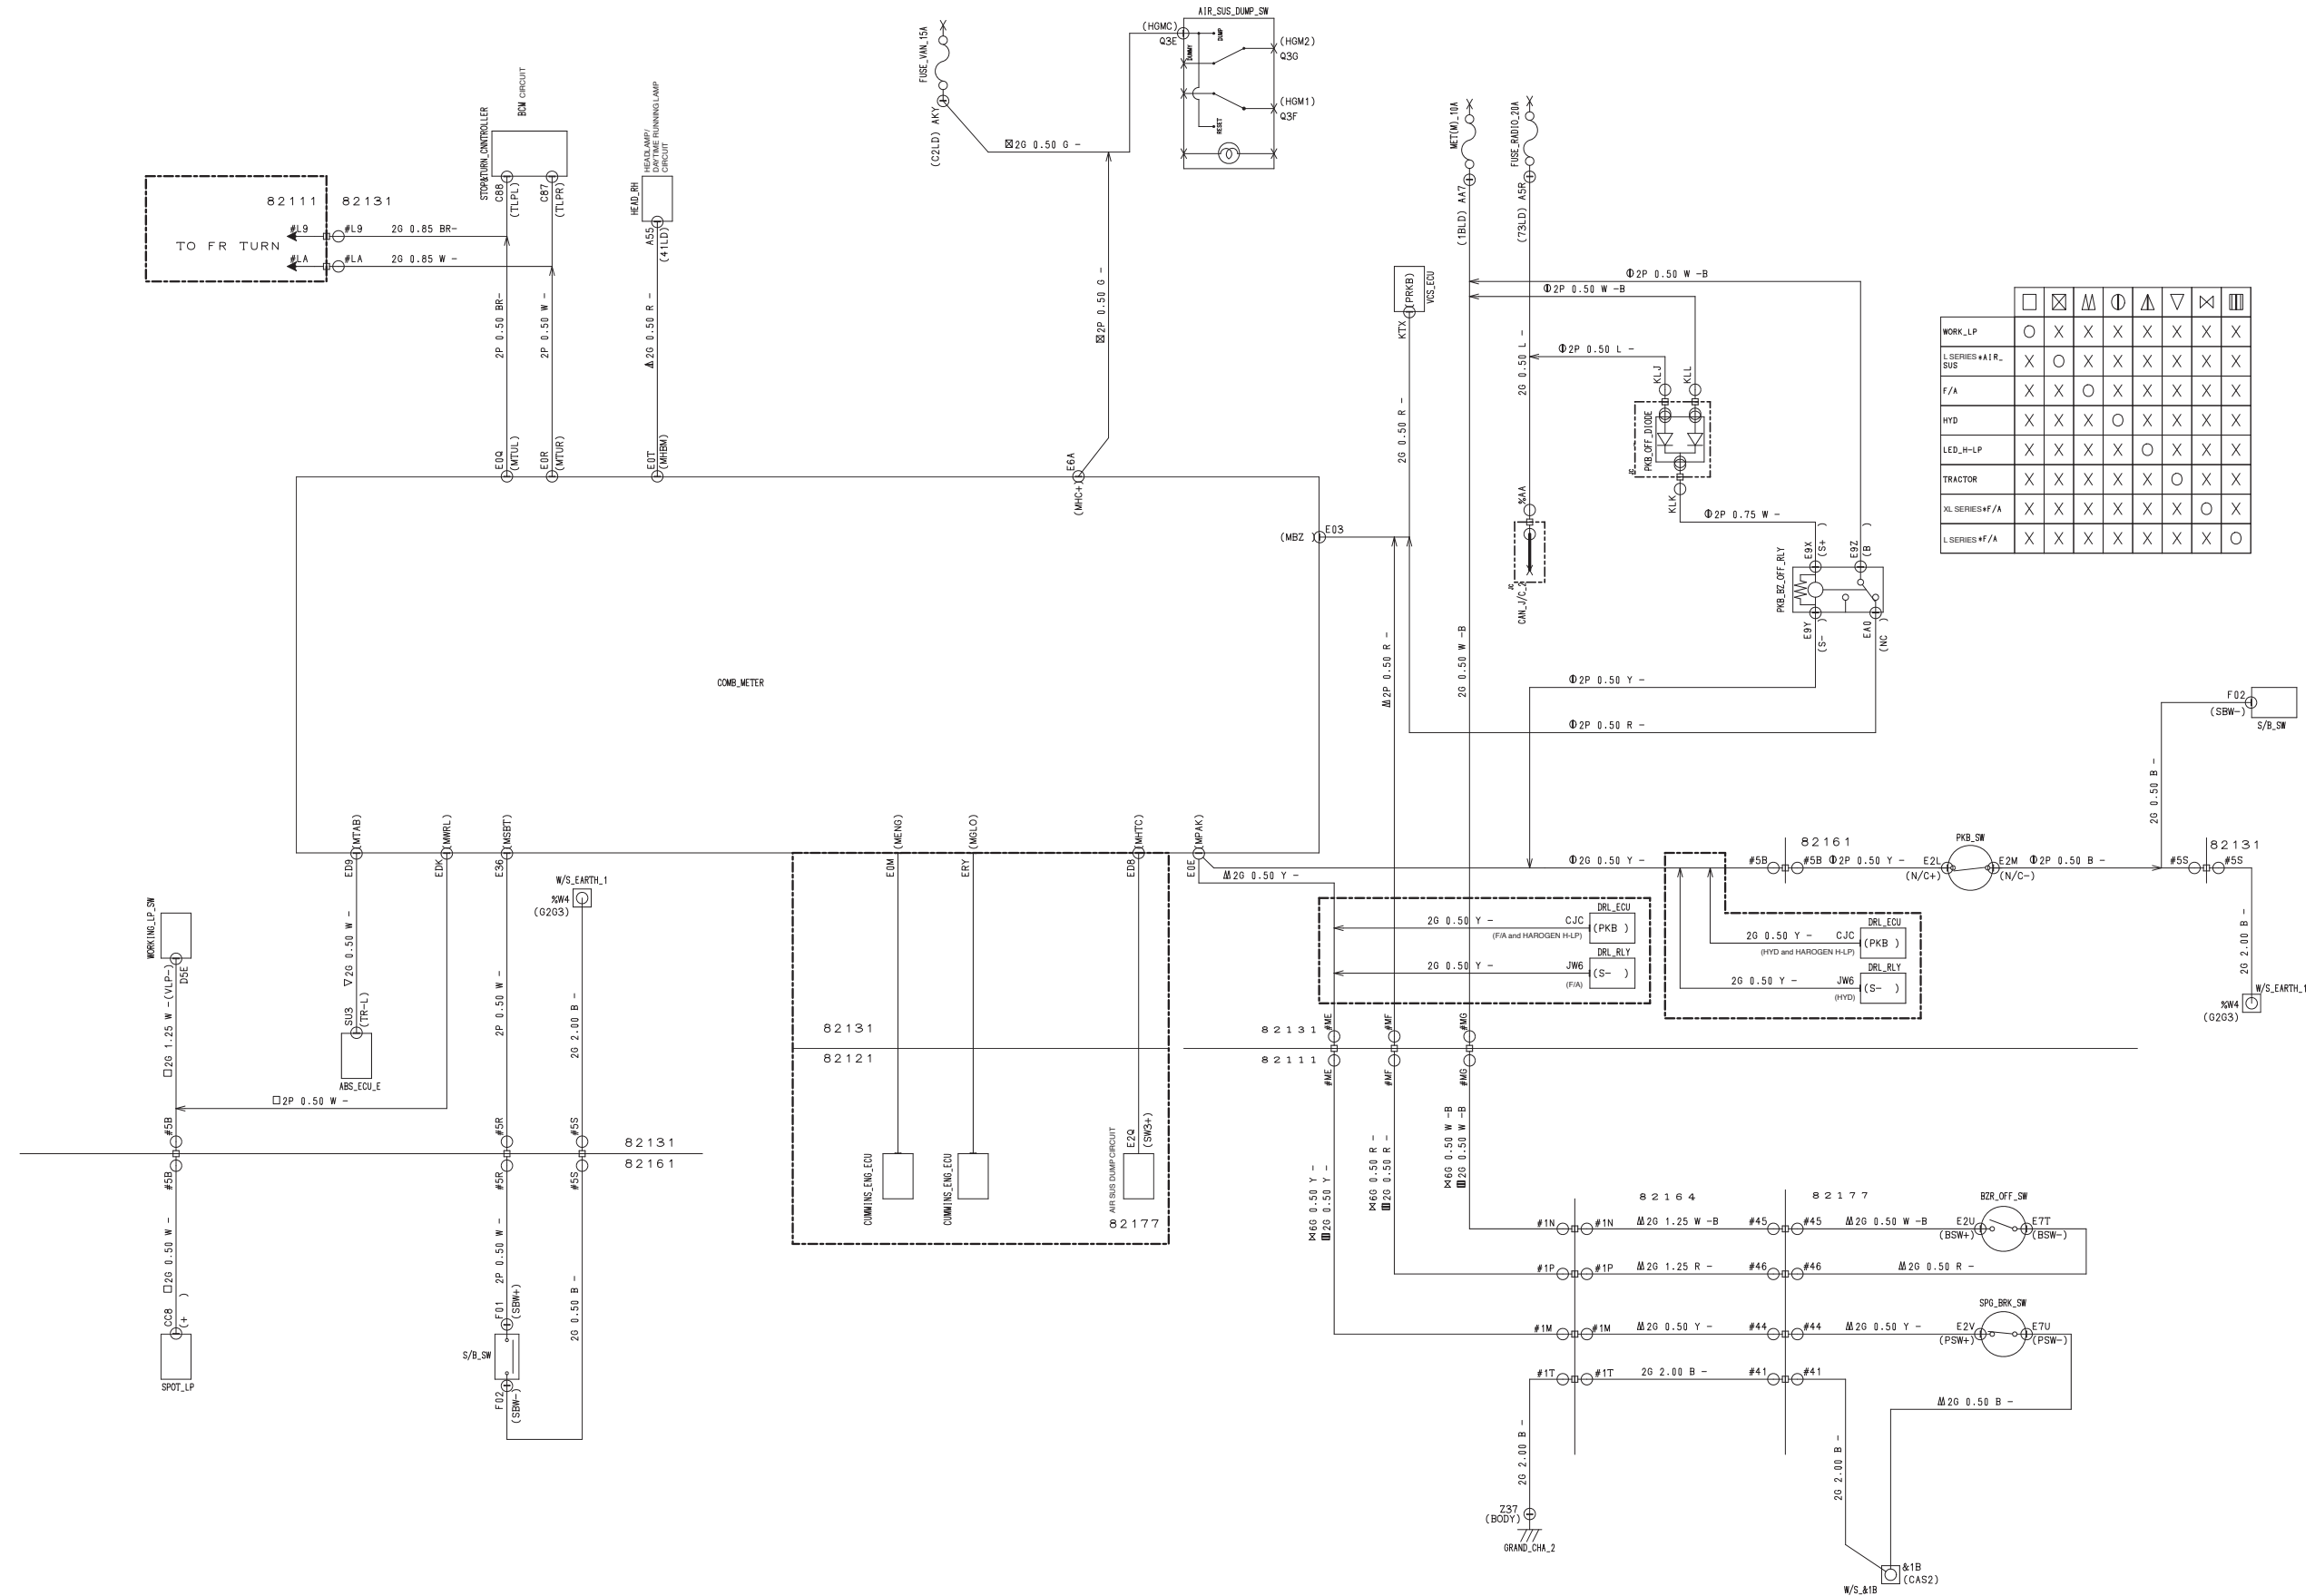
## 10. GRAND CIRCUIT\_2

[illegible]

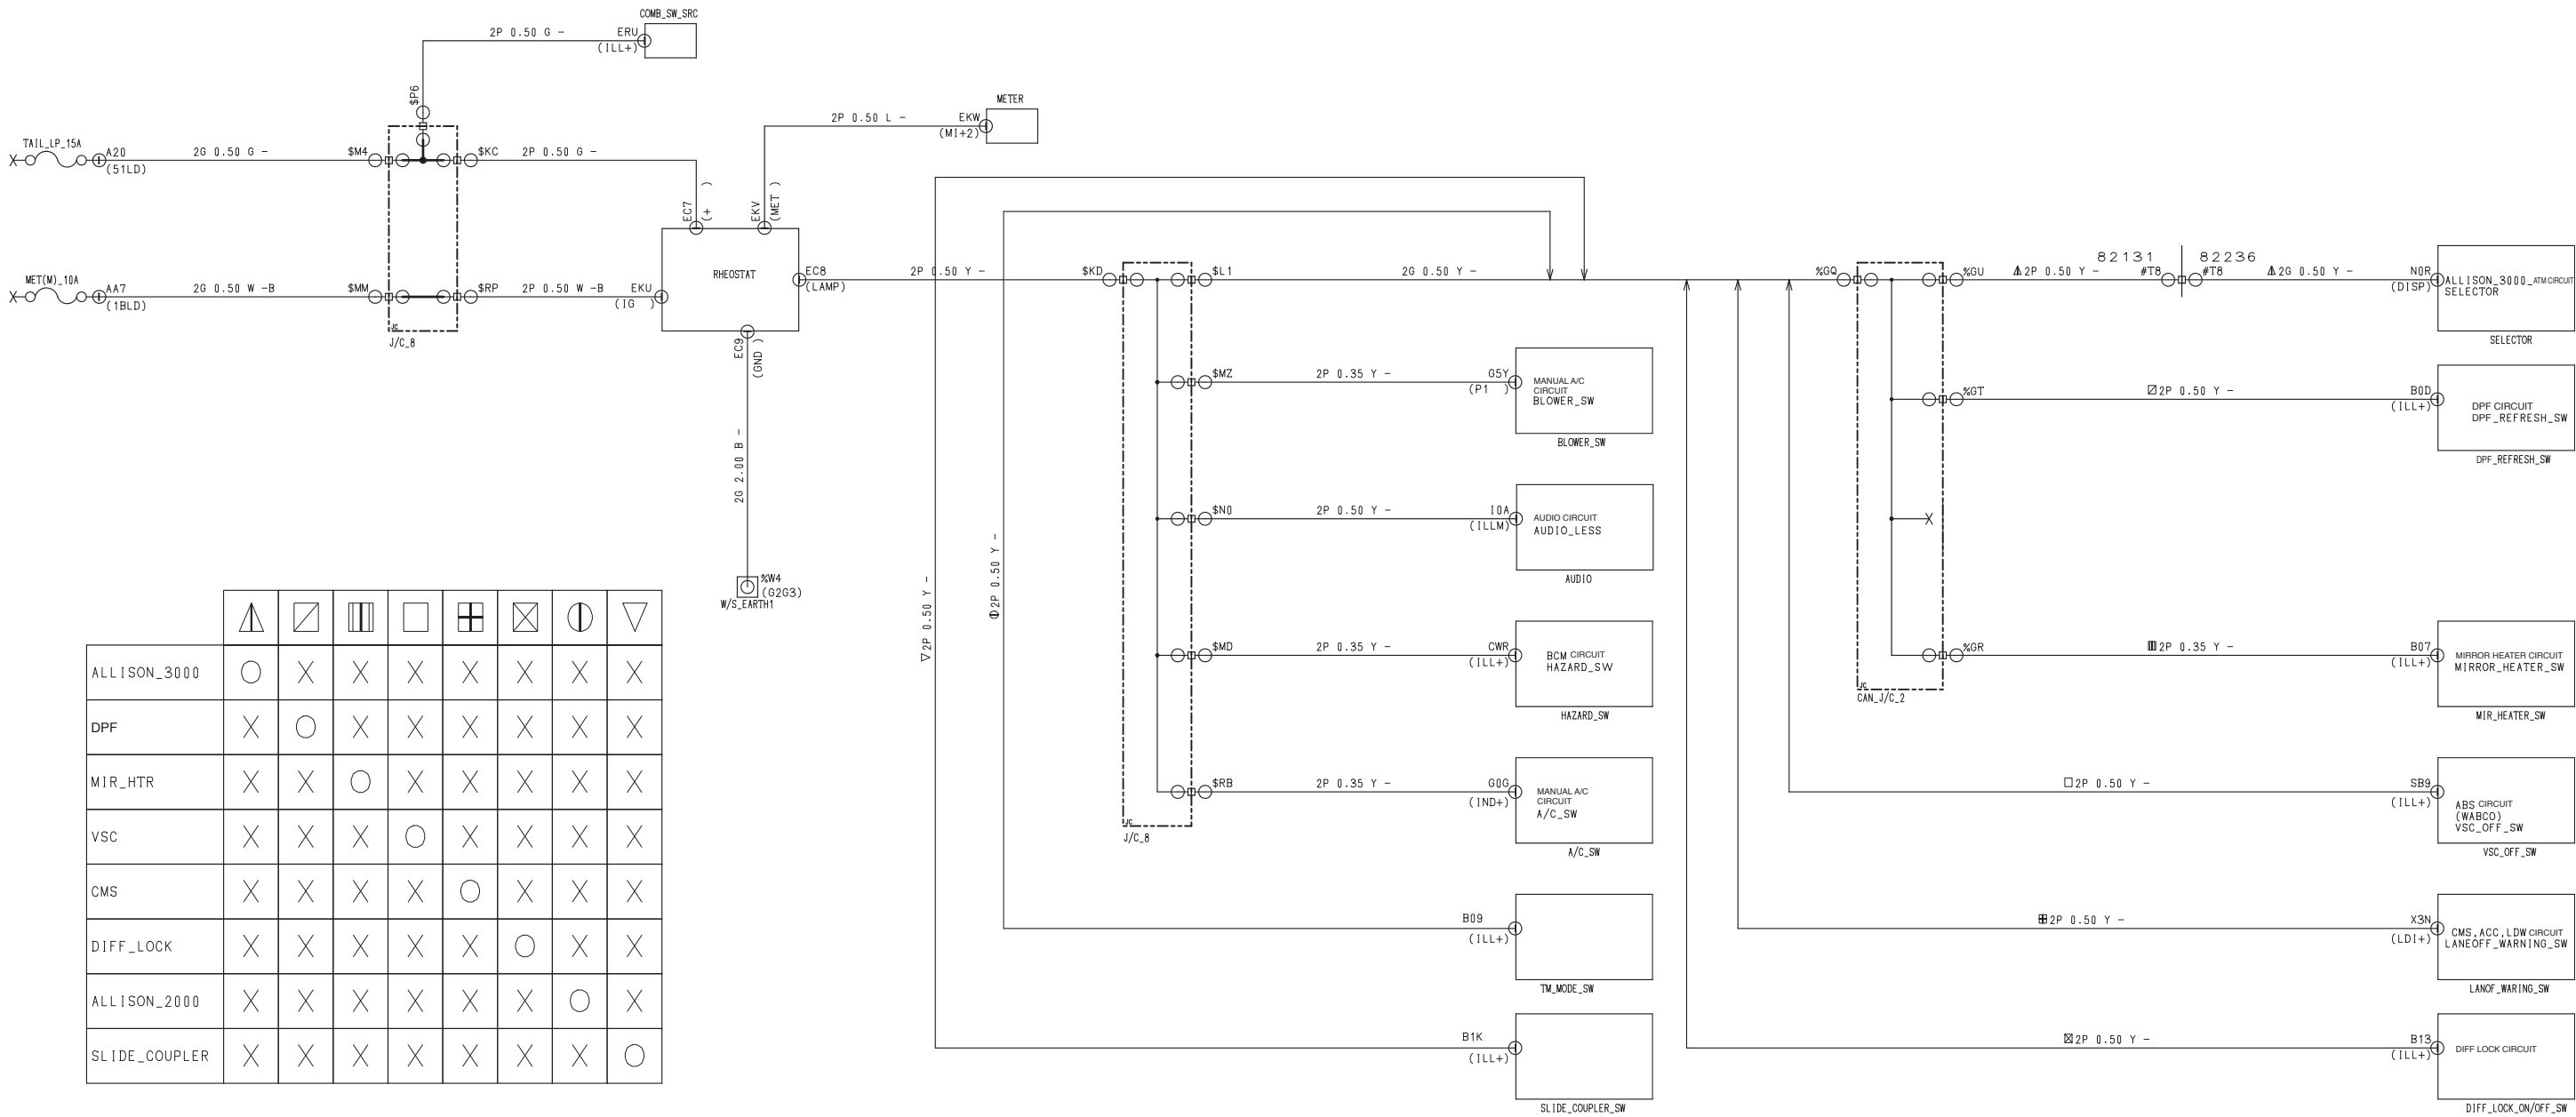
## 11. METER CIRCUIT\_1



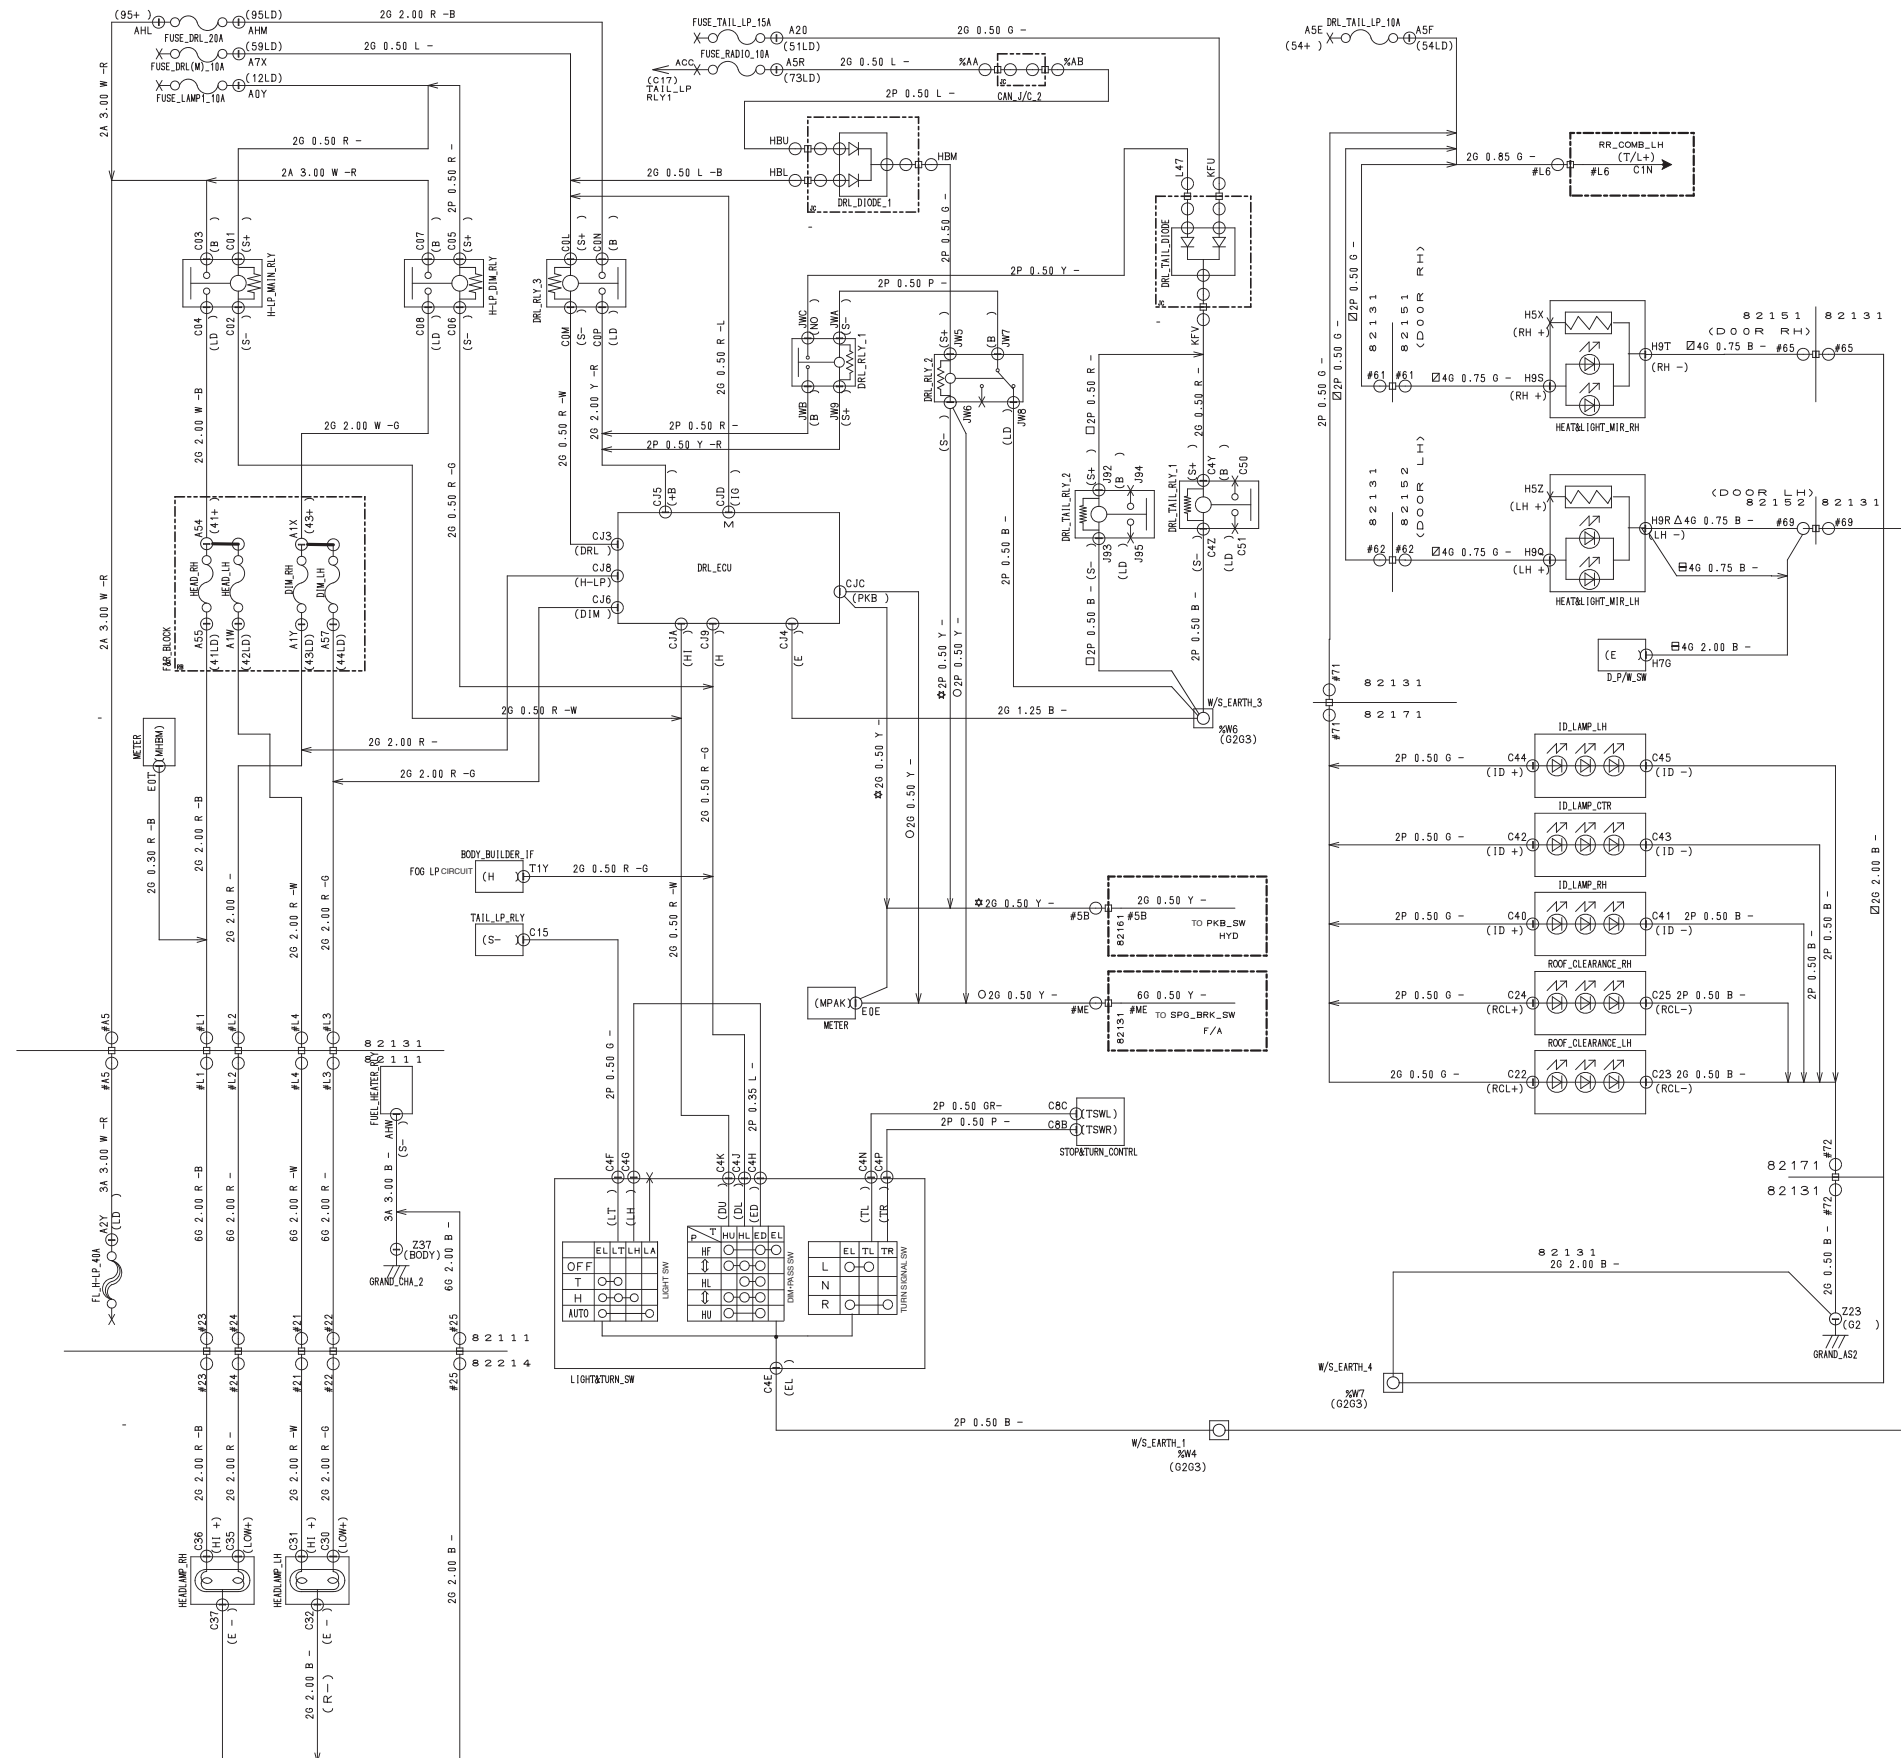
## 12. METER CIRCUIT\_2












13. RHEOSTAT CIRCUIT



#### 14. HALOGEN HEAD LAMP & DAY TIME RUNNING LAMP CIRCUIT

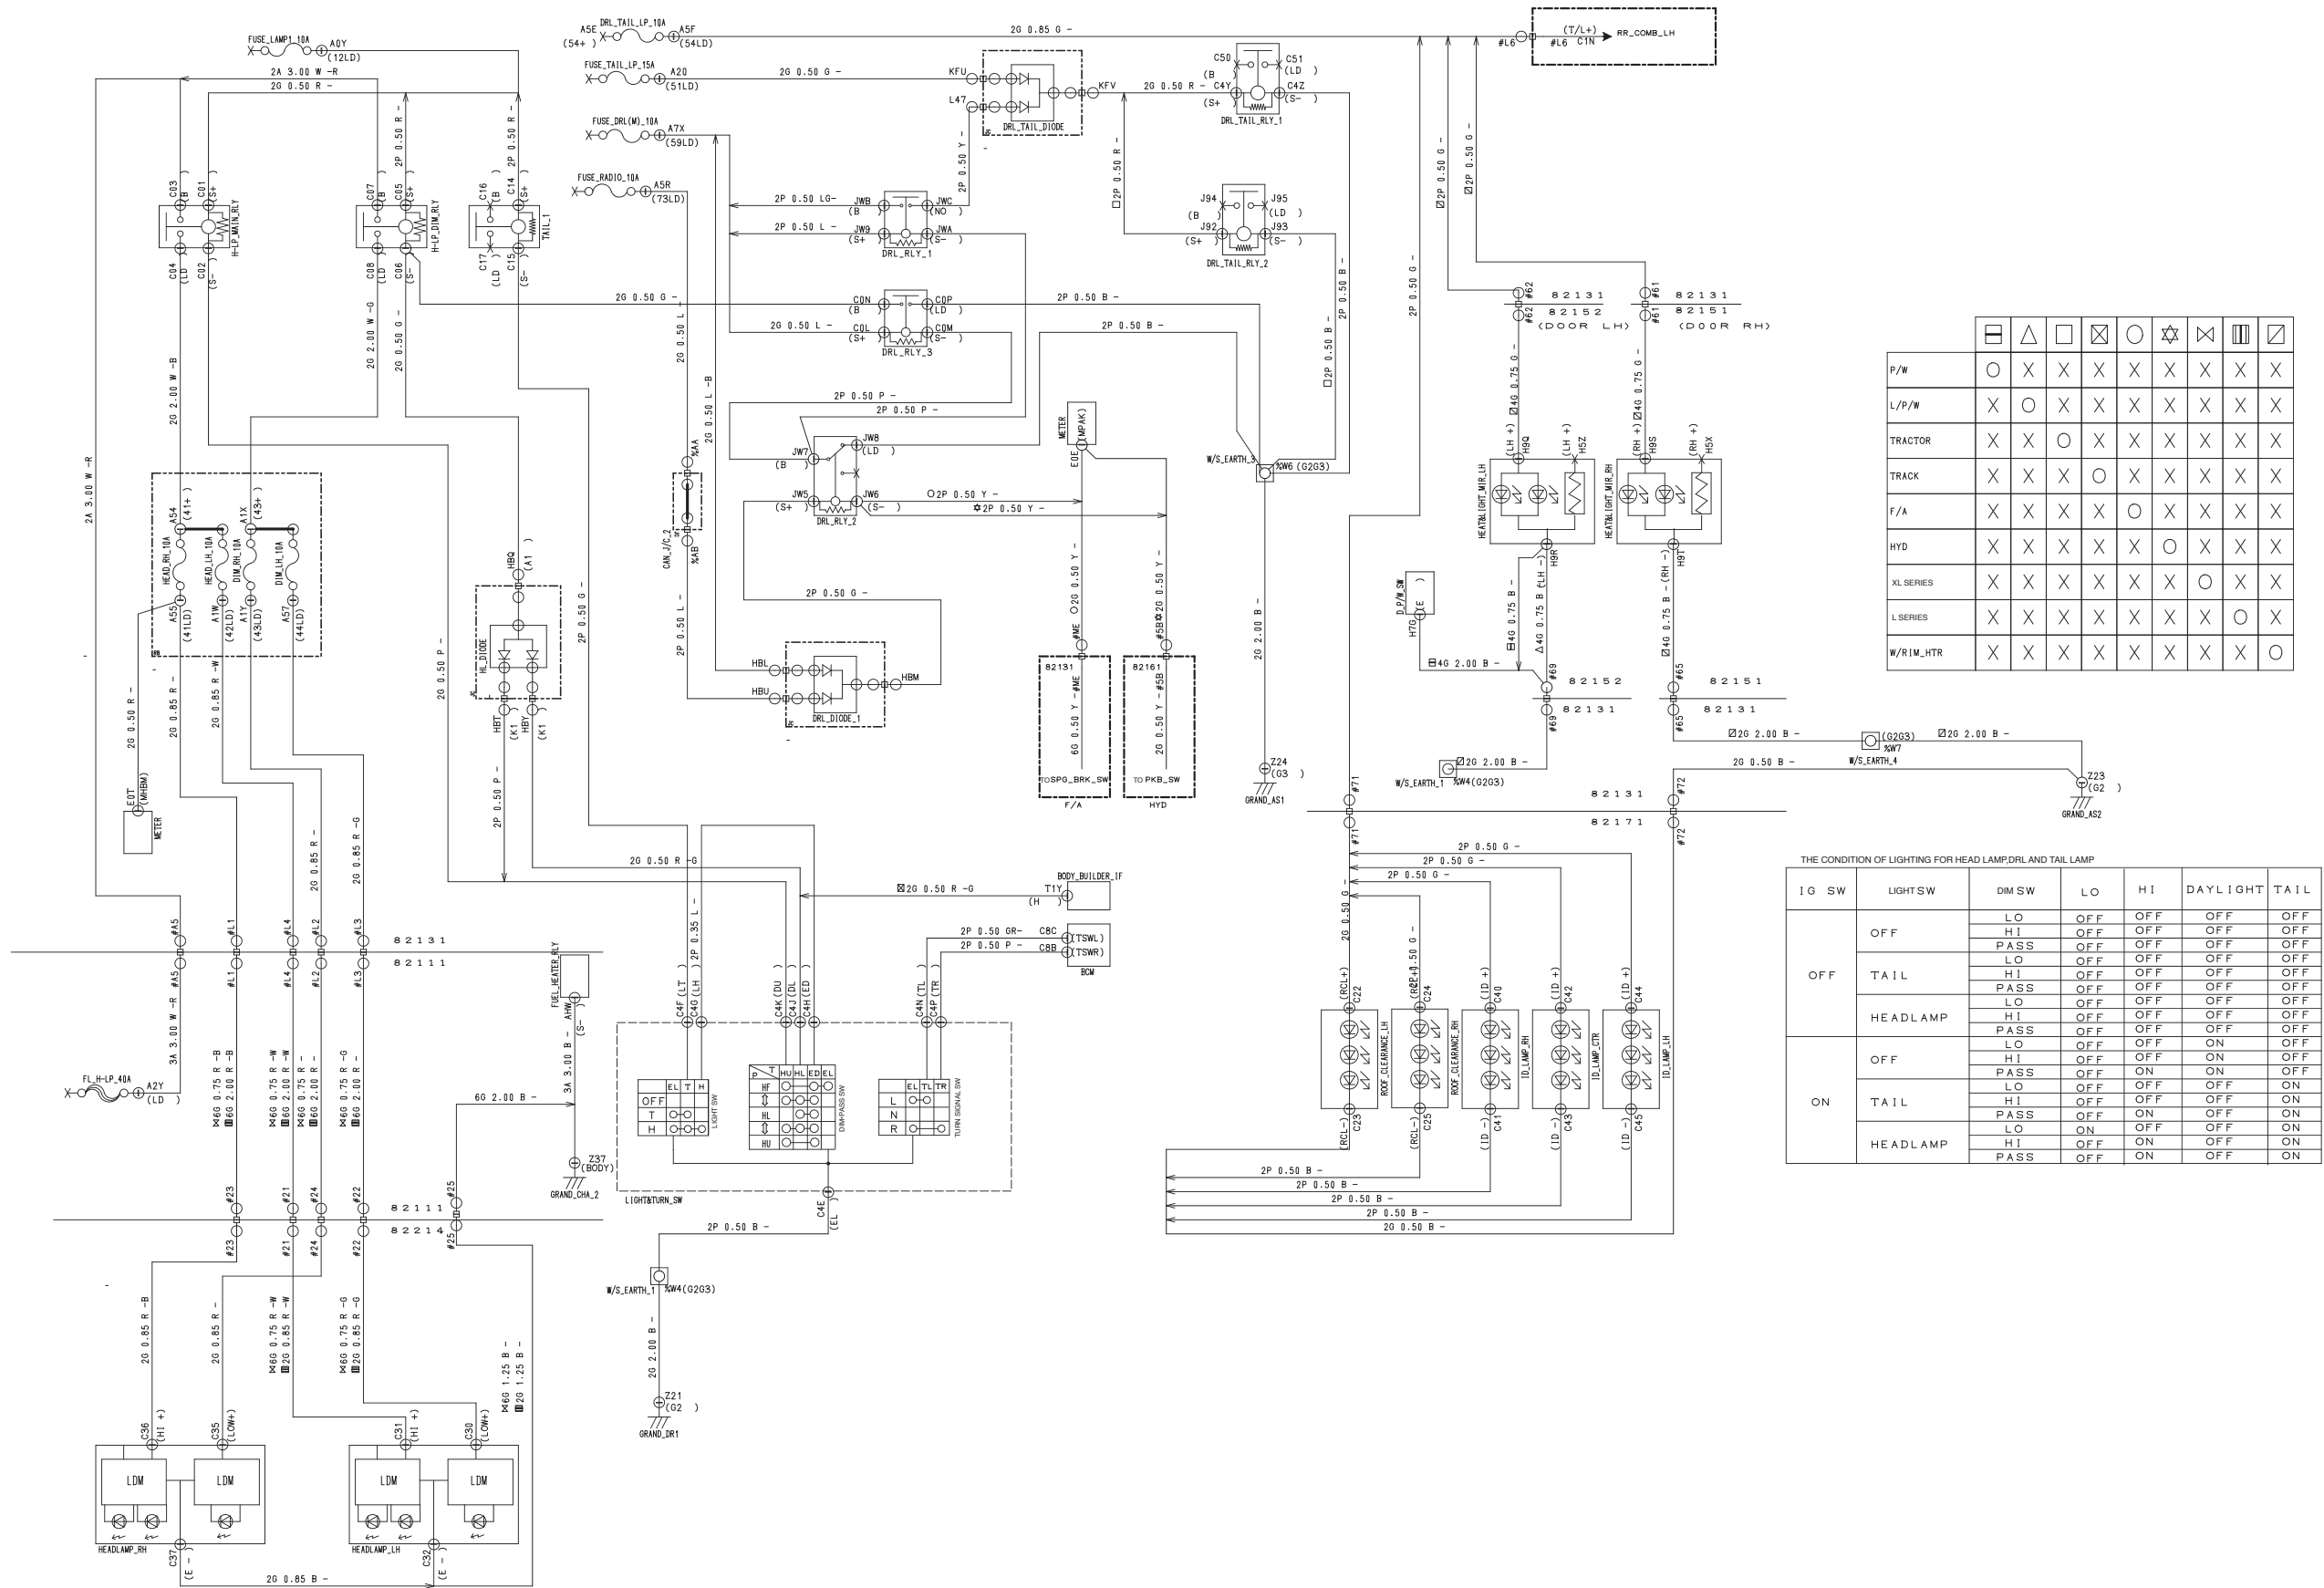


						
P/W		X	X	X	X	X
L/P/W	X		X	X	X	X
F/A	X	X		X	X	X
HYD	X	X	X		X	X
TRACTOR	X	X	X	X		X
W/RIM_HTR	X	X	X	X	X	

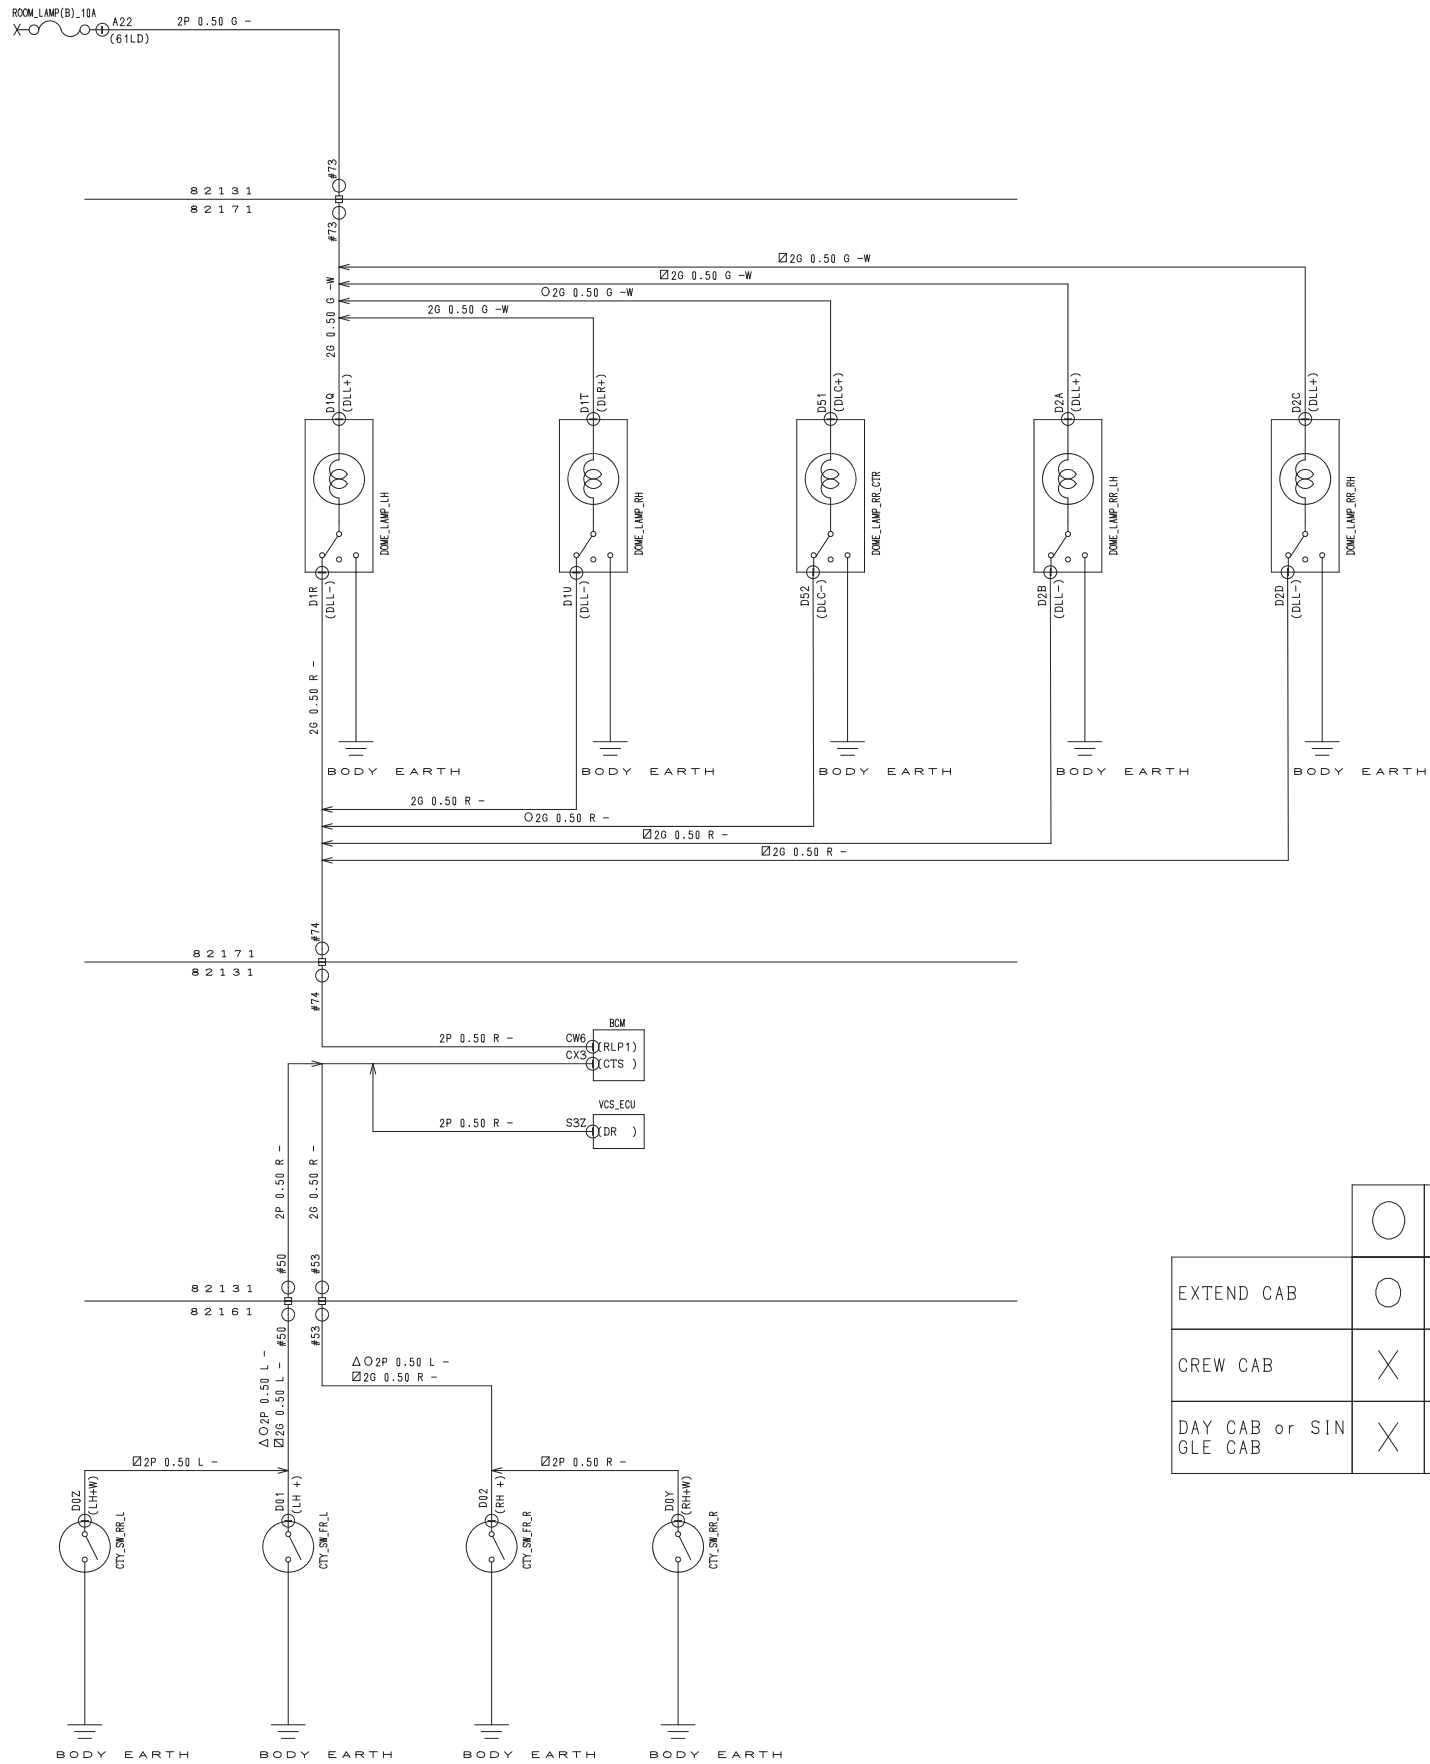
THE CONDITION OF LIGHTING FOR HEAD LAMP, DRL AND TAIL LAMP						
IG SW	LIGHT SW	DIM SW	LO	HI	DAYLIGHT	TAIL
OFF	OFF	LO	OFF	OFF	OFF	OFF
		HI	OFF	OFF	OFF	OFF
		PASS	OFF	OFF	OFF	OFF
	TAIL	LO	OFF	OFF	OFF	OFF
		HI	OFF	OFF	OFF	OFF
		PASS	OFF	OFF	OFF	OFF
	HEADLAMP	LO	OFF	OFF	OFF	OFF
		HI	OFF	OFF	OFF	OFF
		PASS	OFF	OFF	OFF	OFF
ON	OFF	LO	OFF	OFF	ON	OFF
		HI	OFF	OFF	ON	OFF
		PASS	OFF	ON	ON	OFF
	TAIL	LO	OFF	OFF	OFF	ON
		HI	OFF	OFF	OFF	ON
		PASS	OFF	ON	ON	OFF
	HEADLAMP	LO	ON	OFF	OFF	ON
		HI	OFF	ON	OFF	ON
		PASS	OFF	ON	OFF	ON



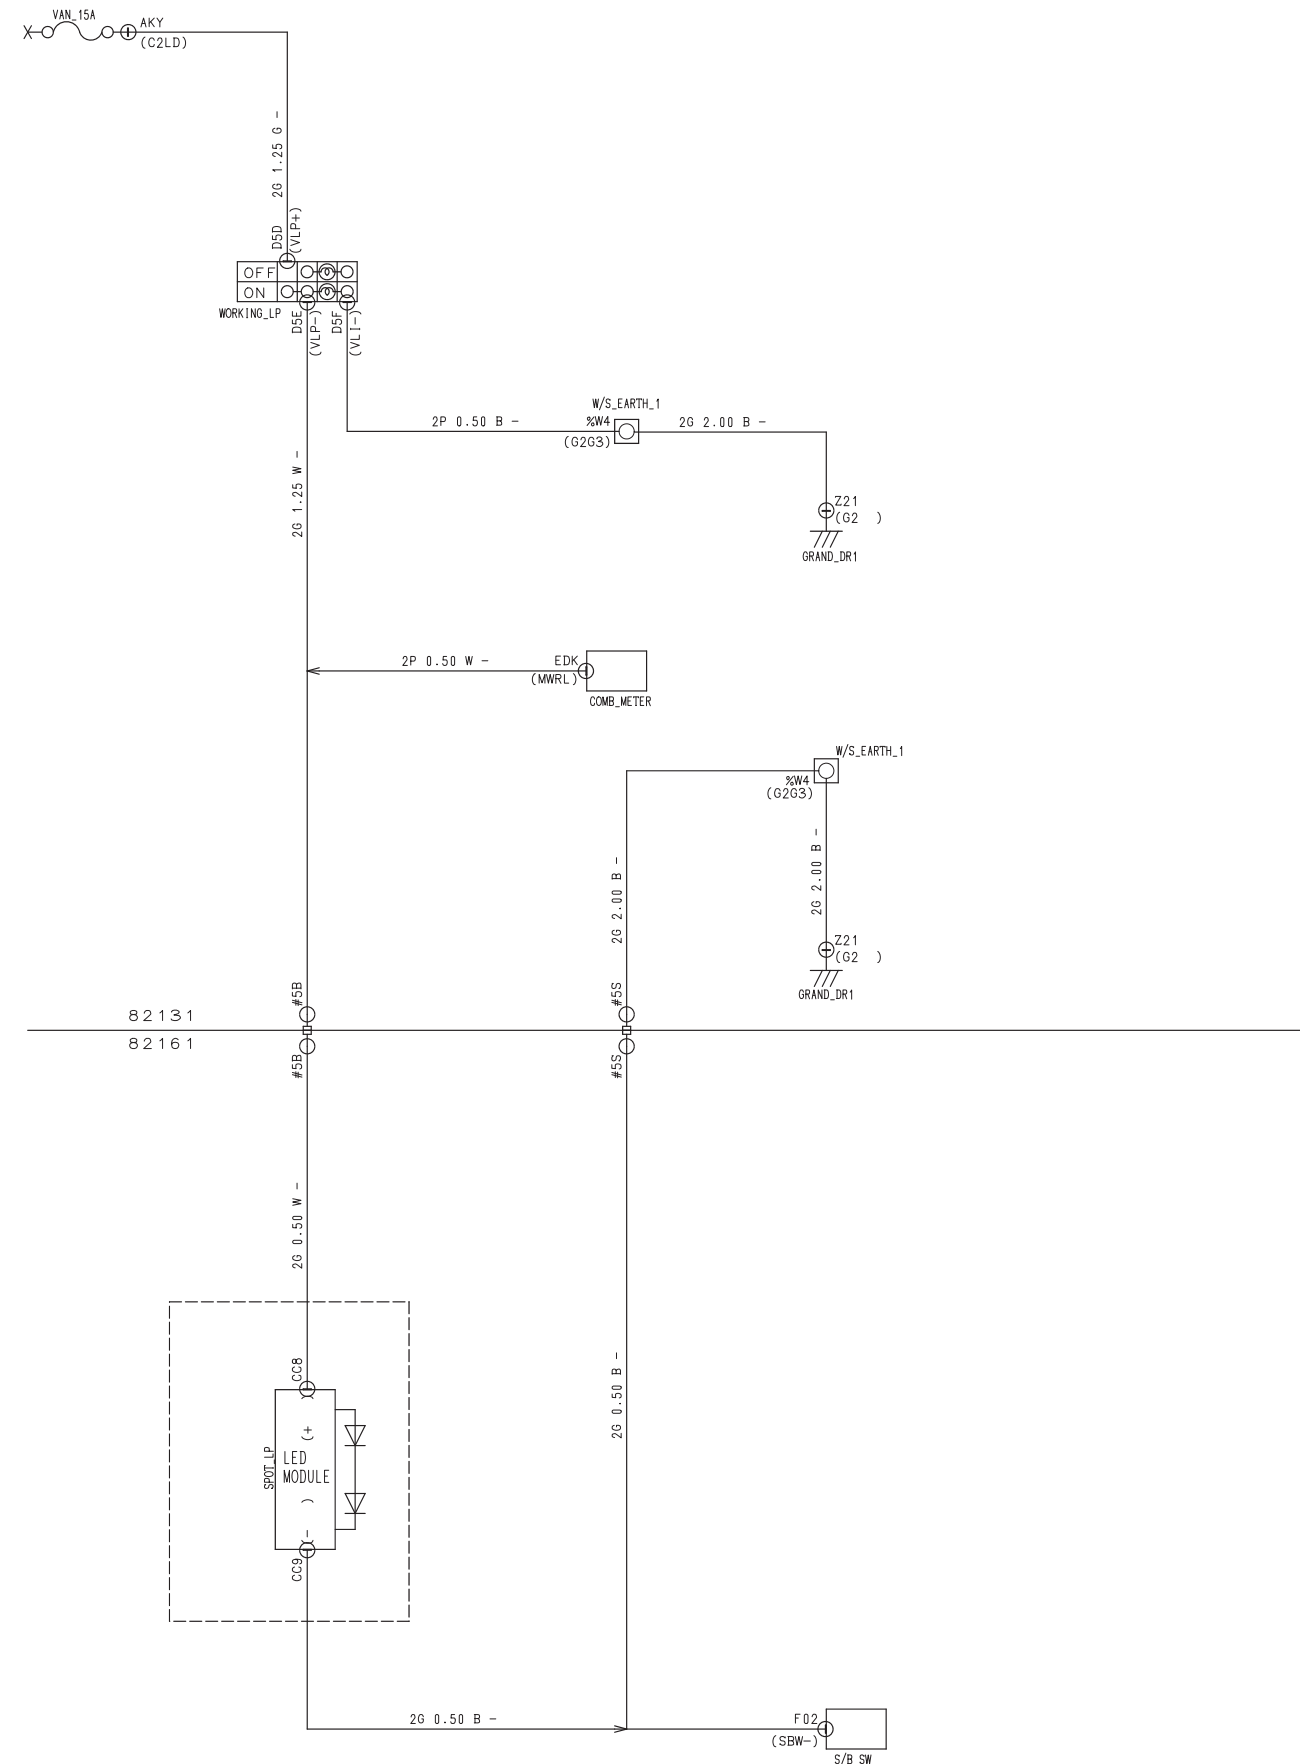
15. LED HEAD LAMP & DAY TIME RUNNING LAMP CIRCUIT



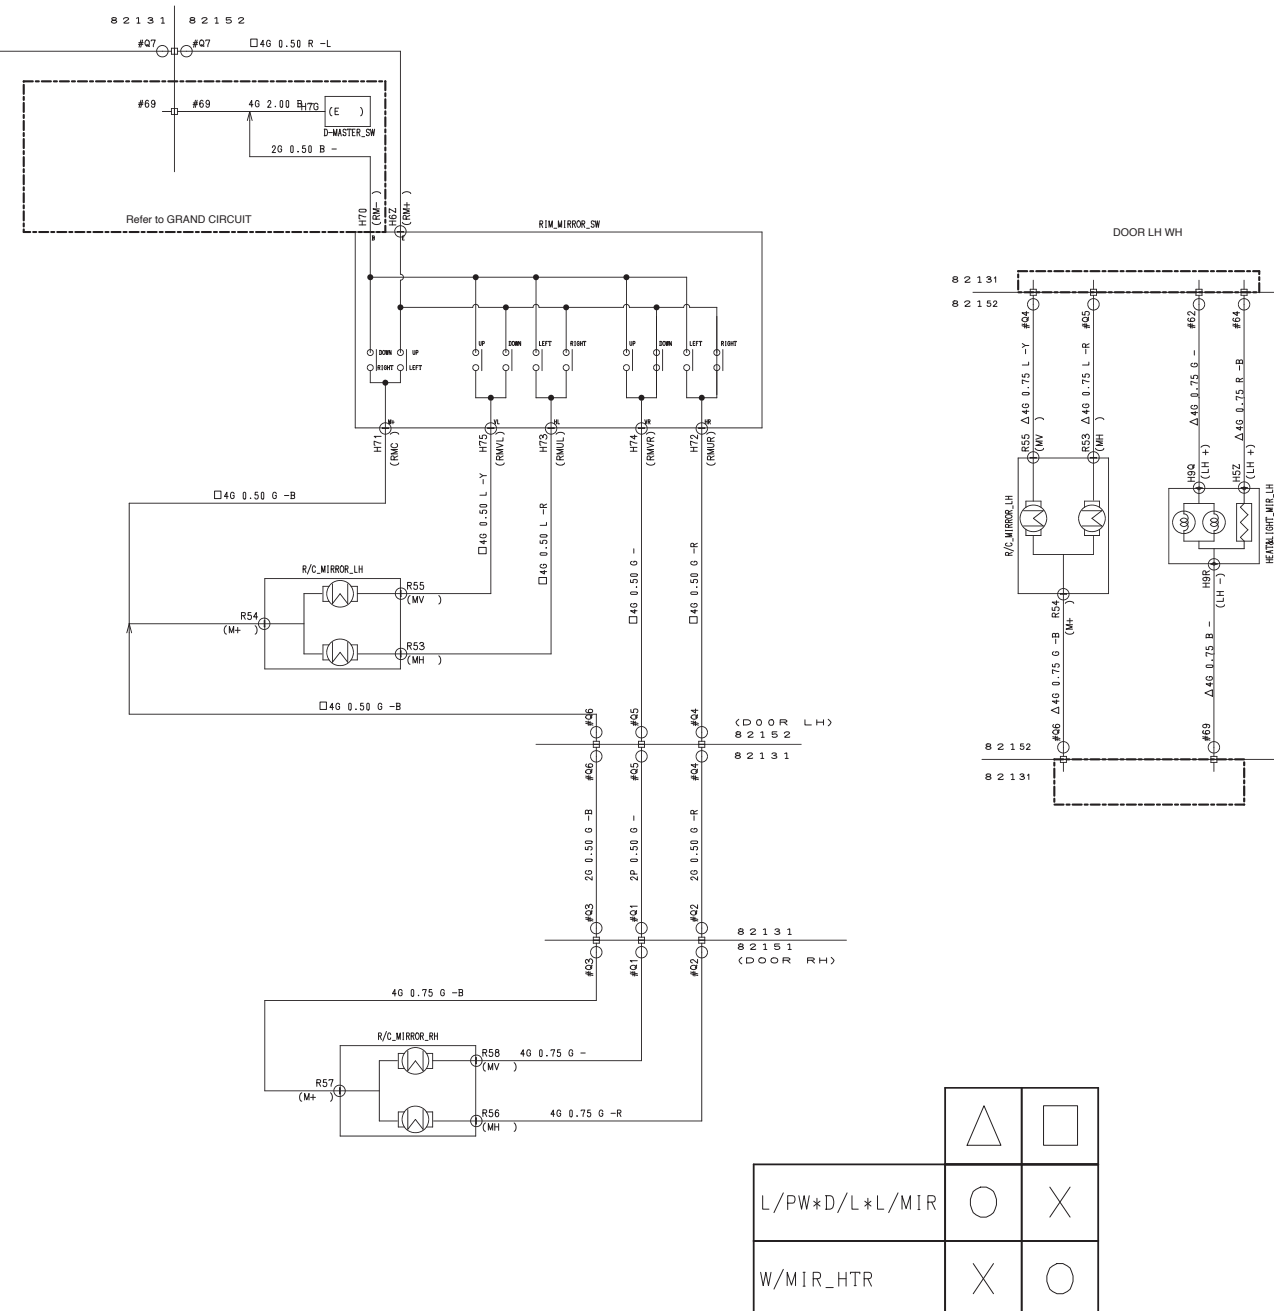
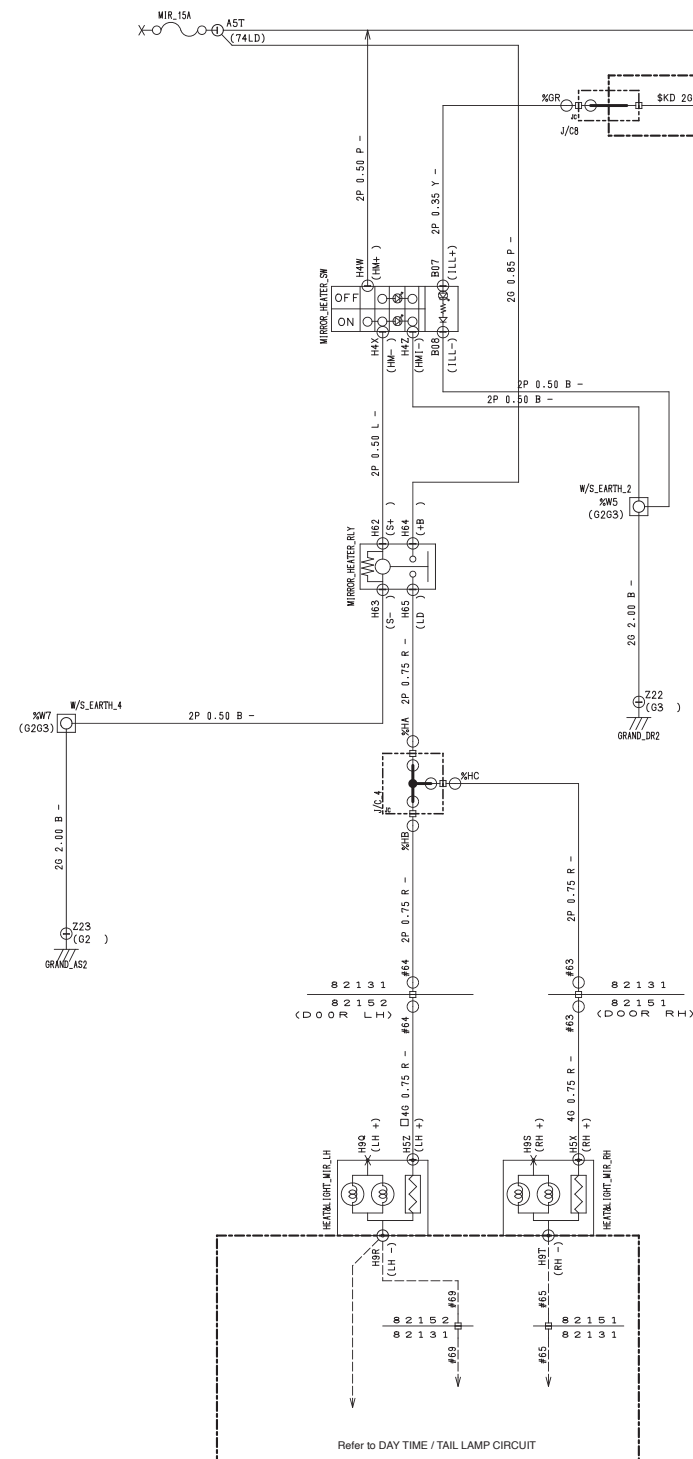
16. ROOM LAMP CIRCUIT









## 17. WORKING LAMP CIRCUIT

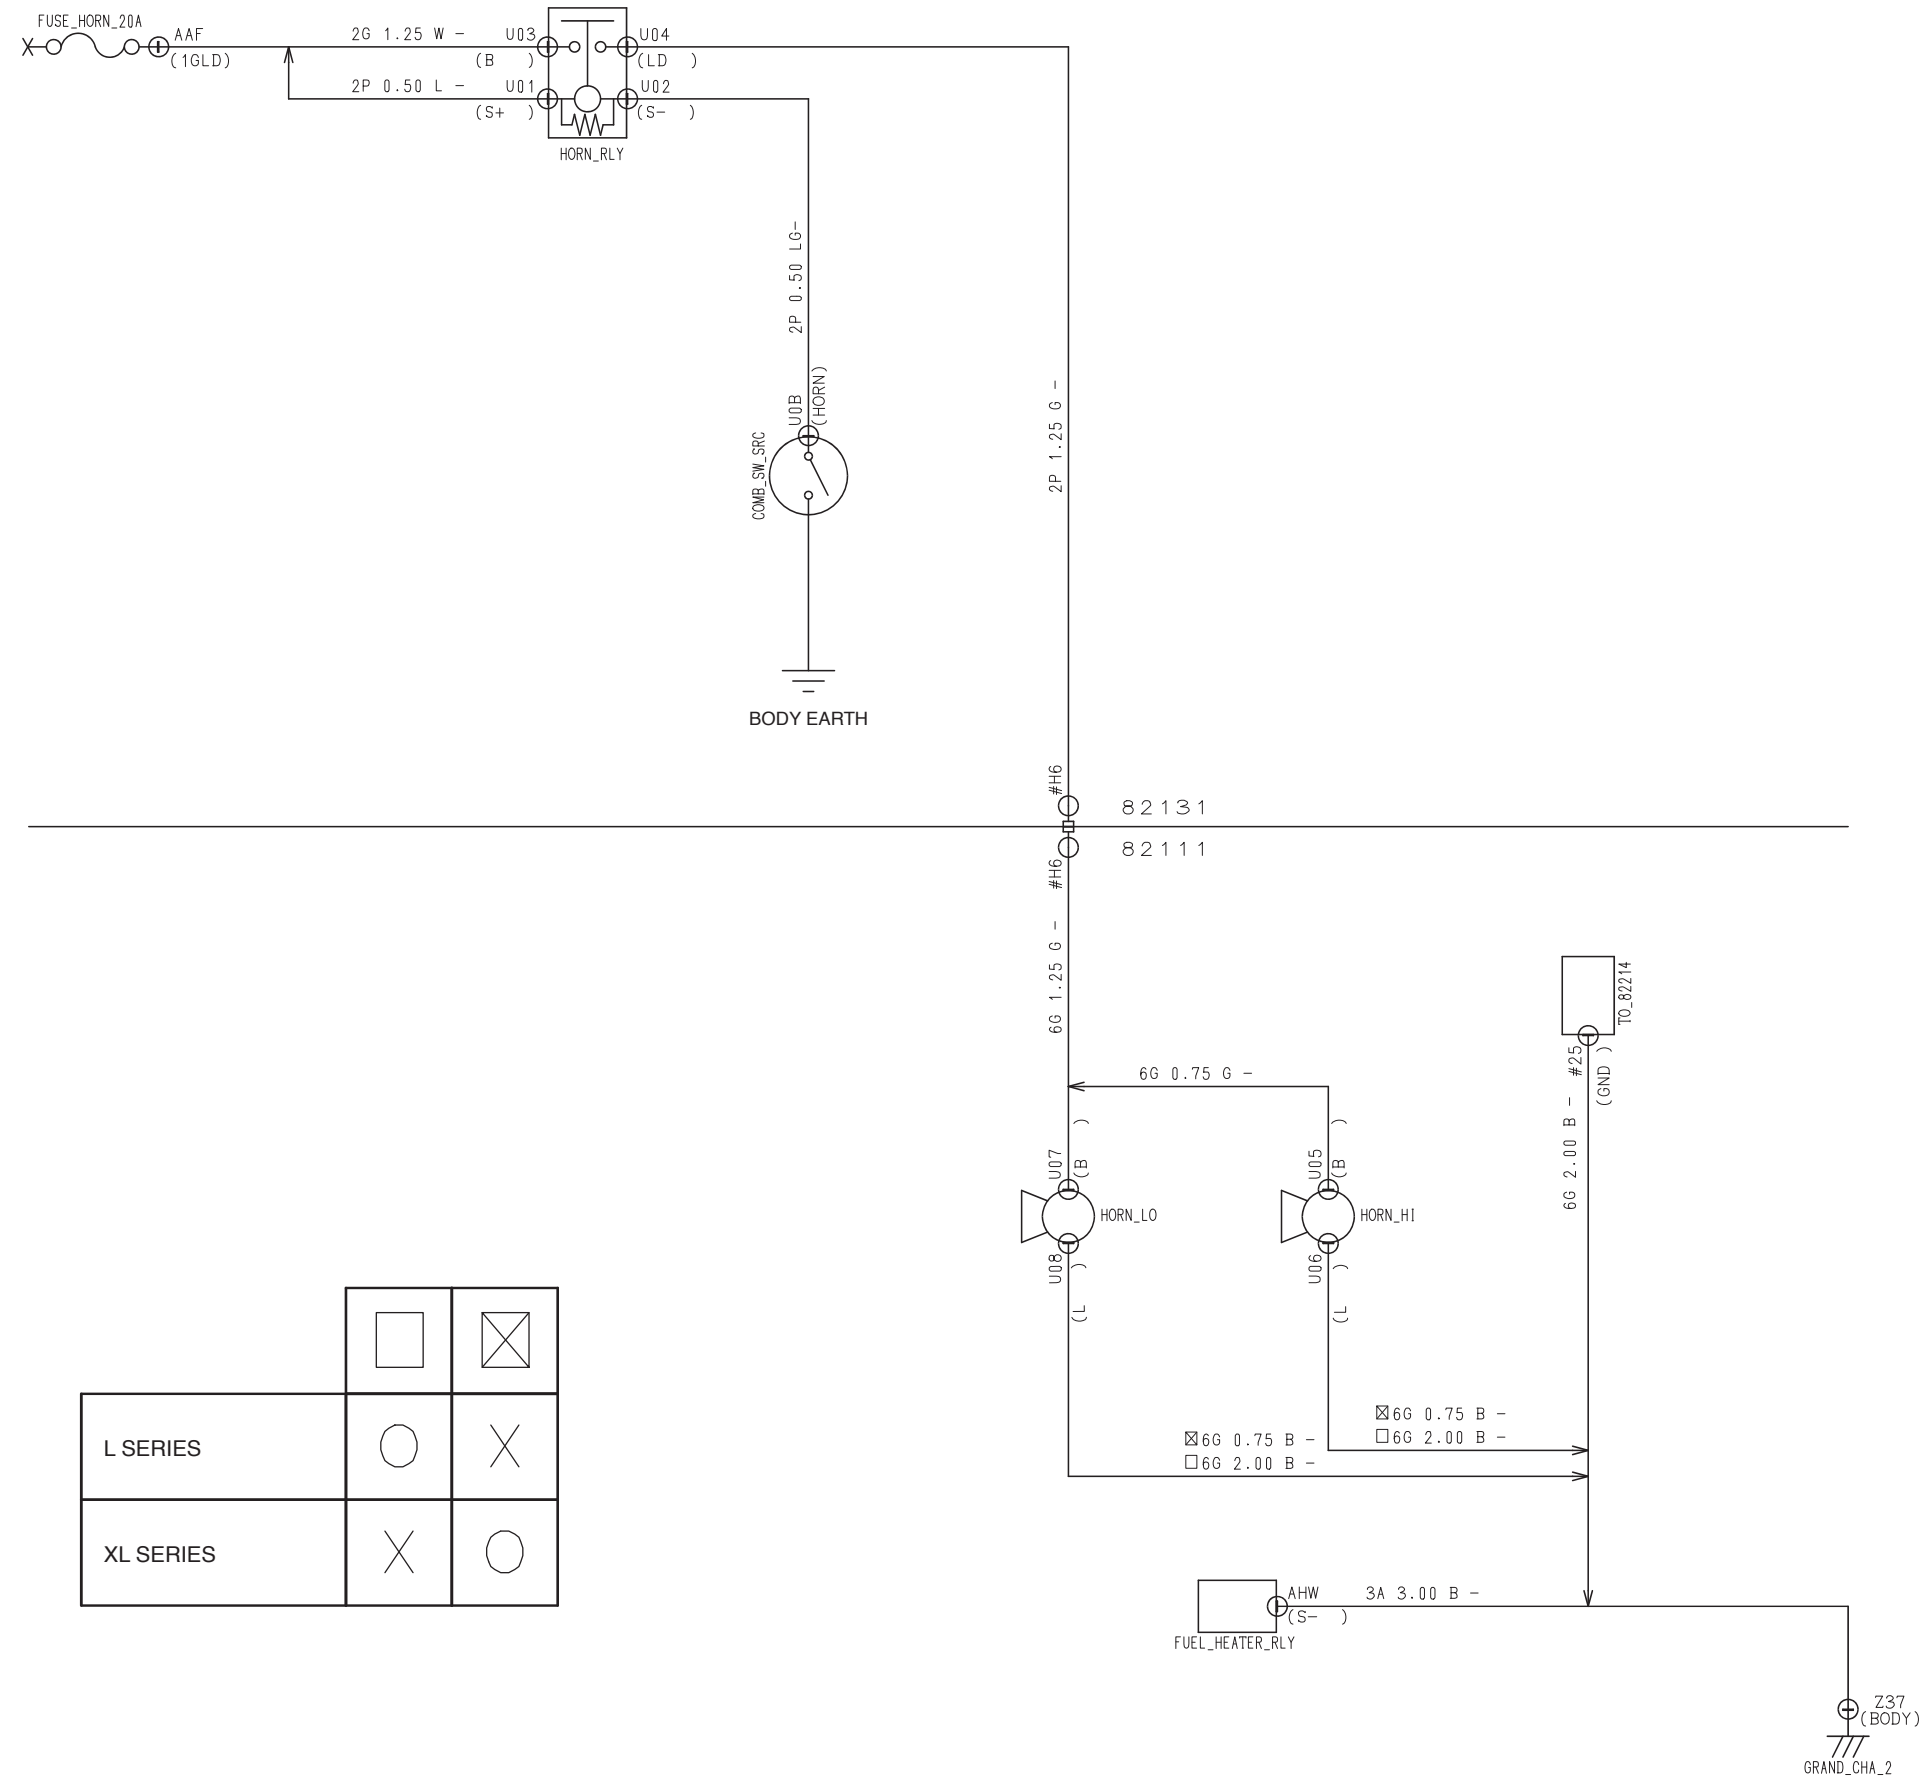


## 18. HEATING MIRROR CIRCUIT & REMOTE CONTROL MIRROR CIRCUIT

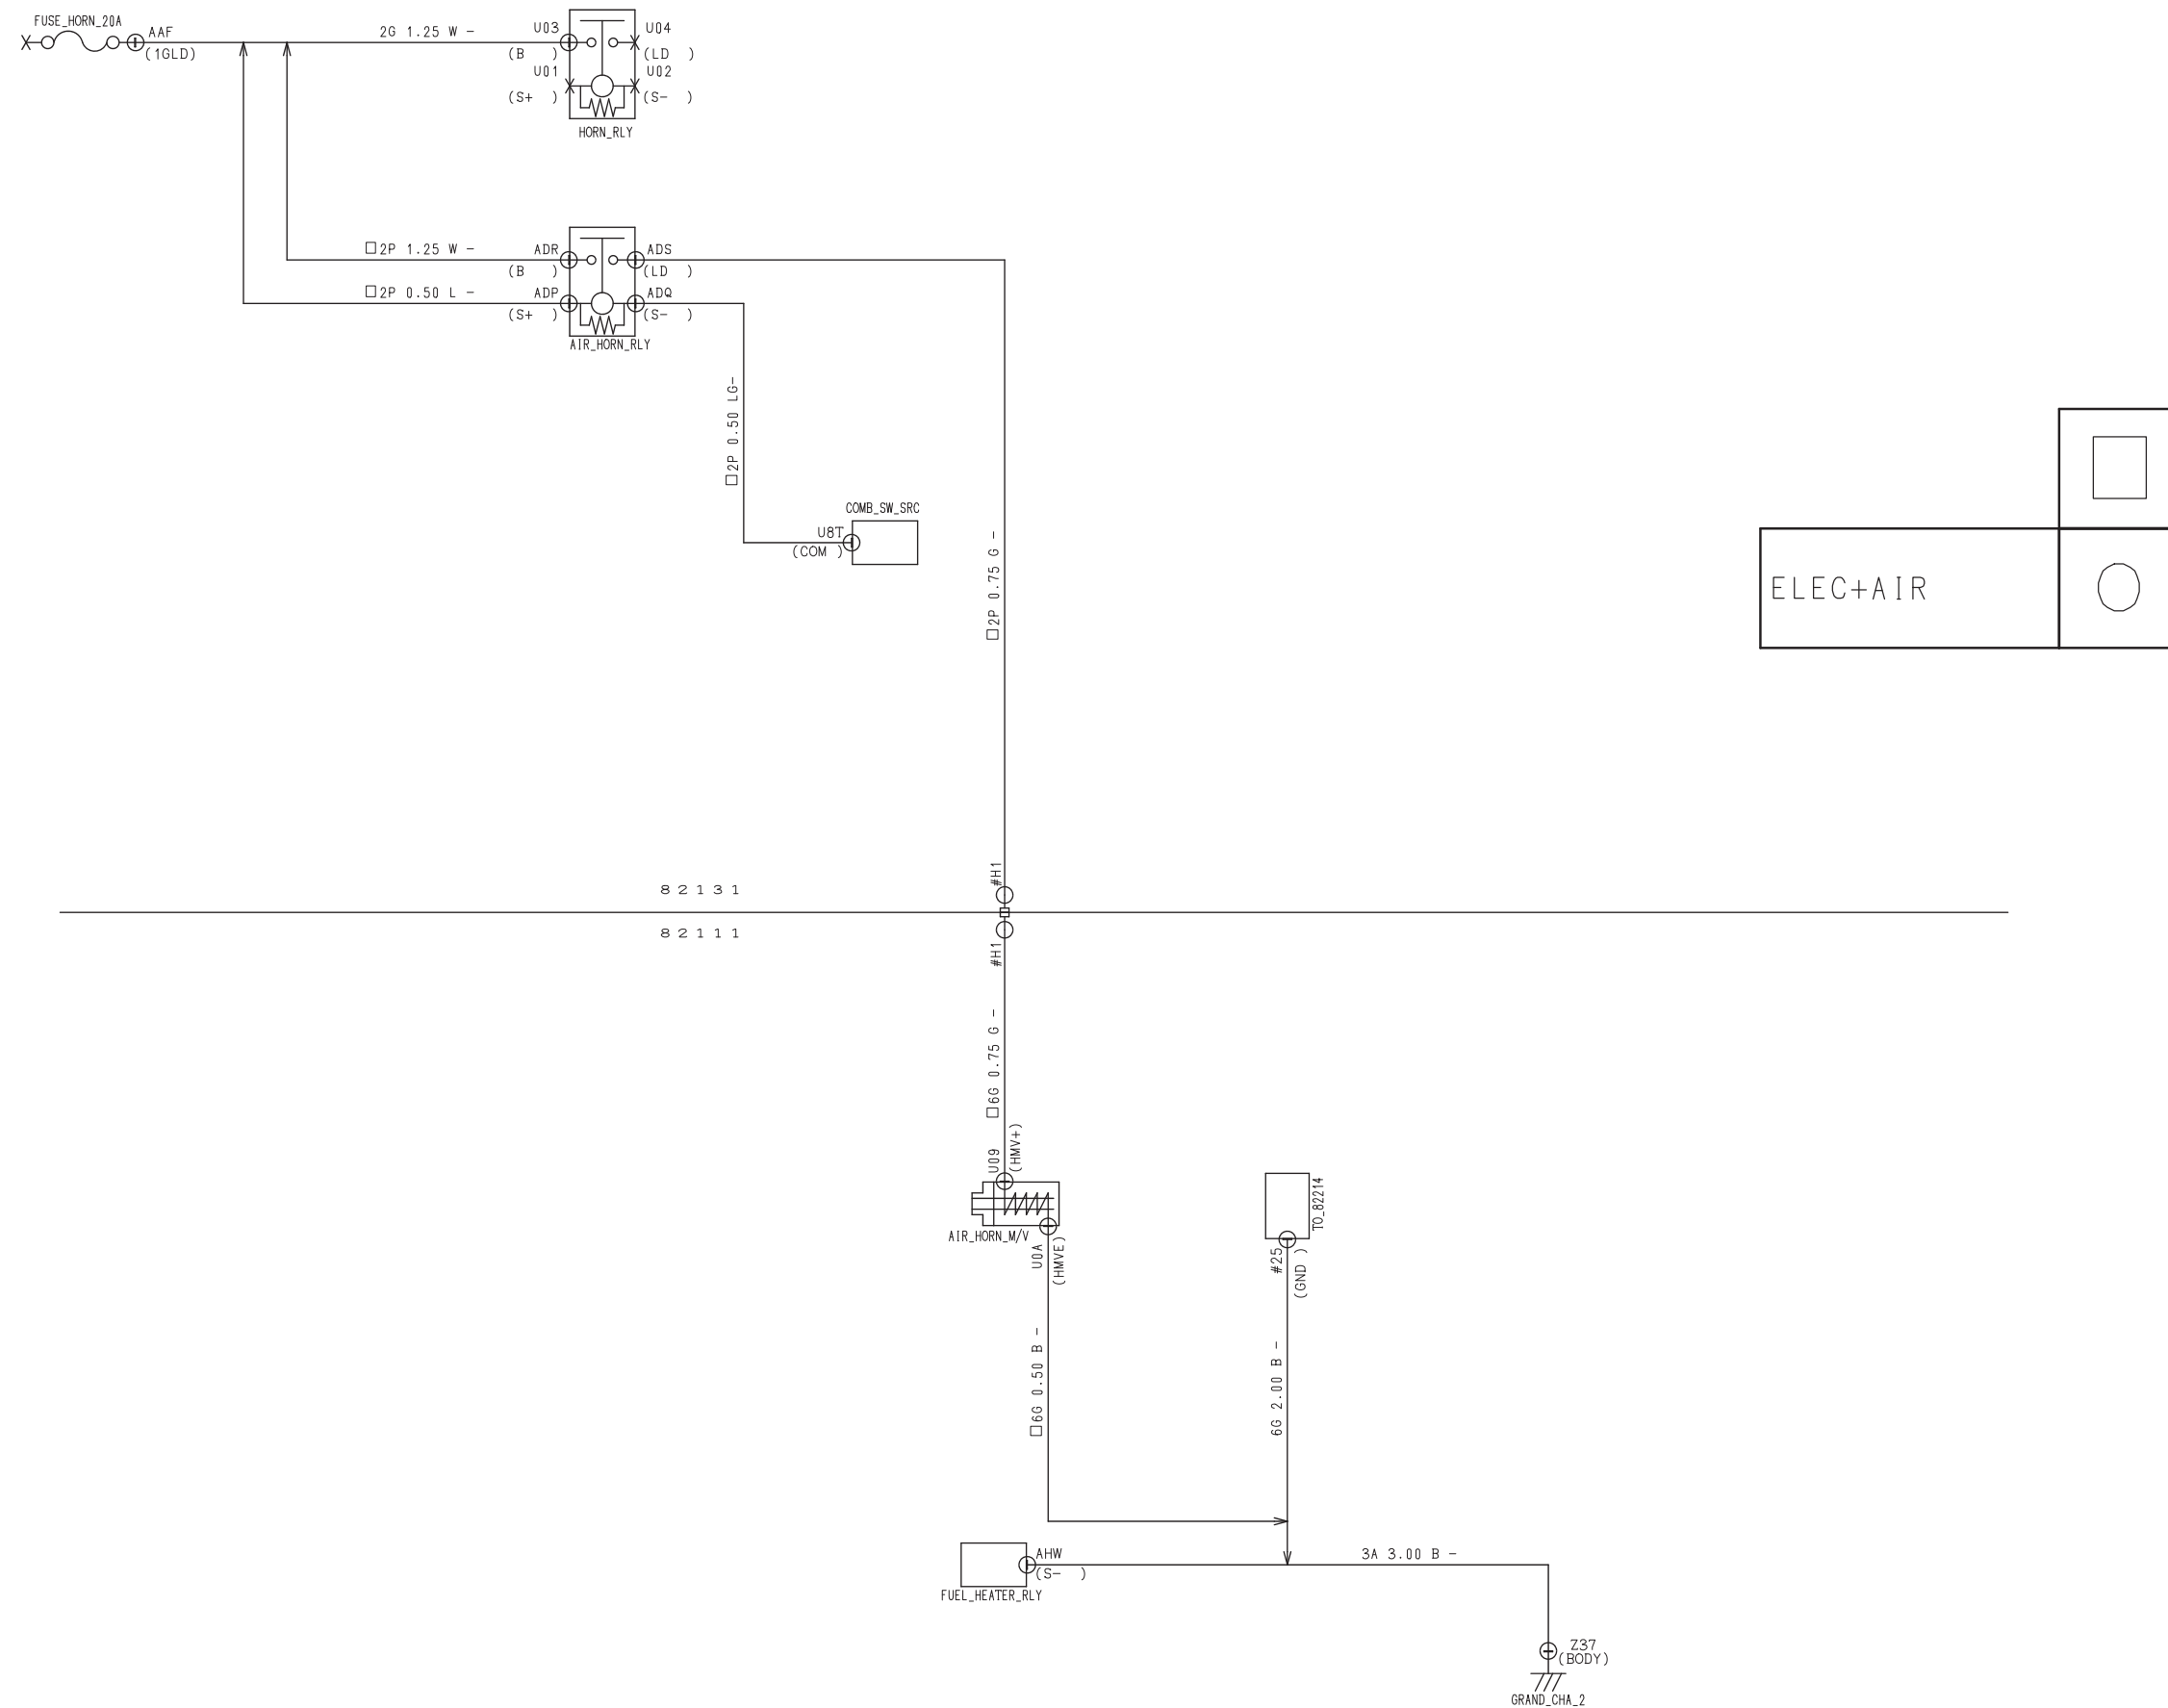


		
L/PW*D/L*L/MIR		
W/MIR_HTR		

## 19. ELECTRICAL HORN CIRCUIT

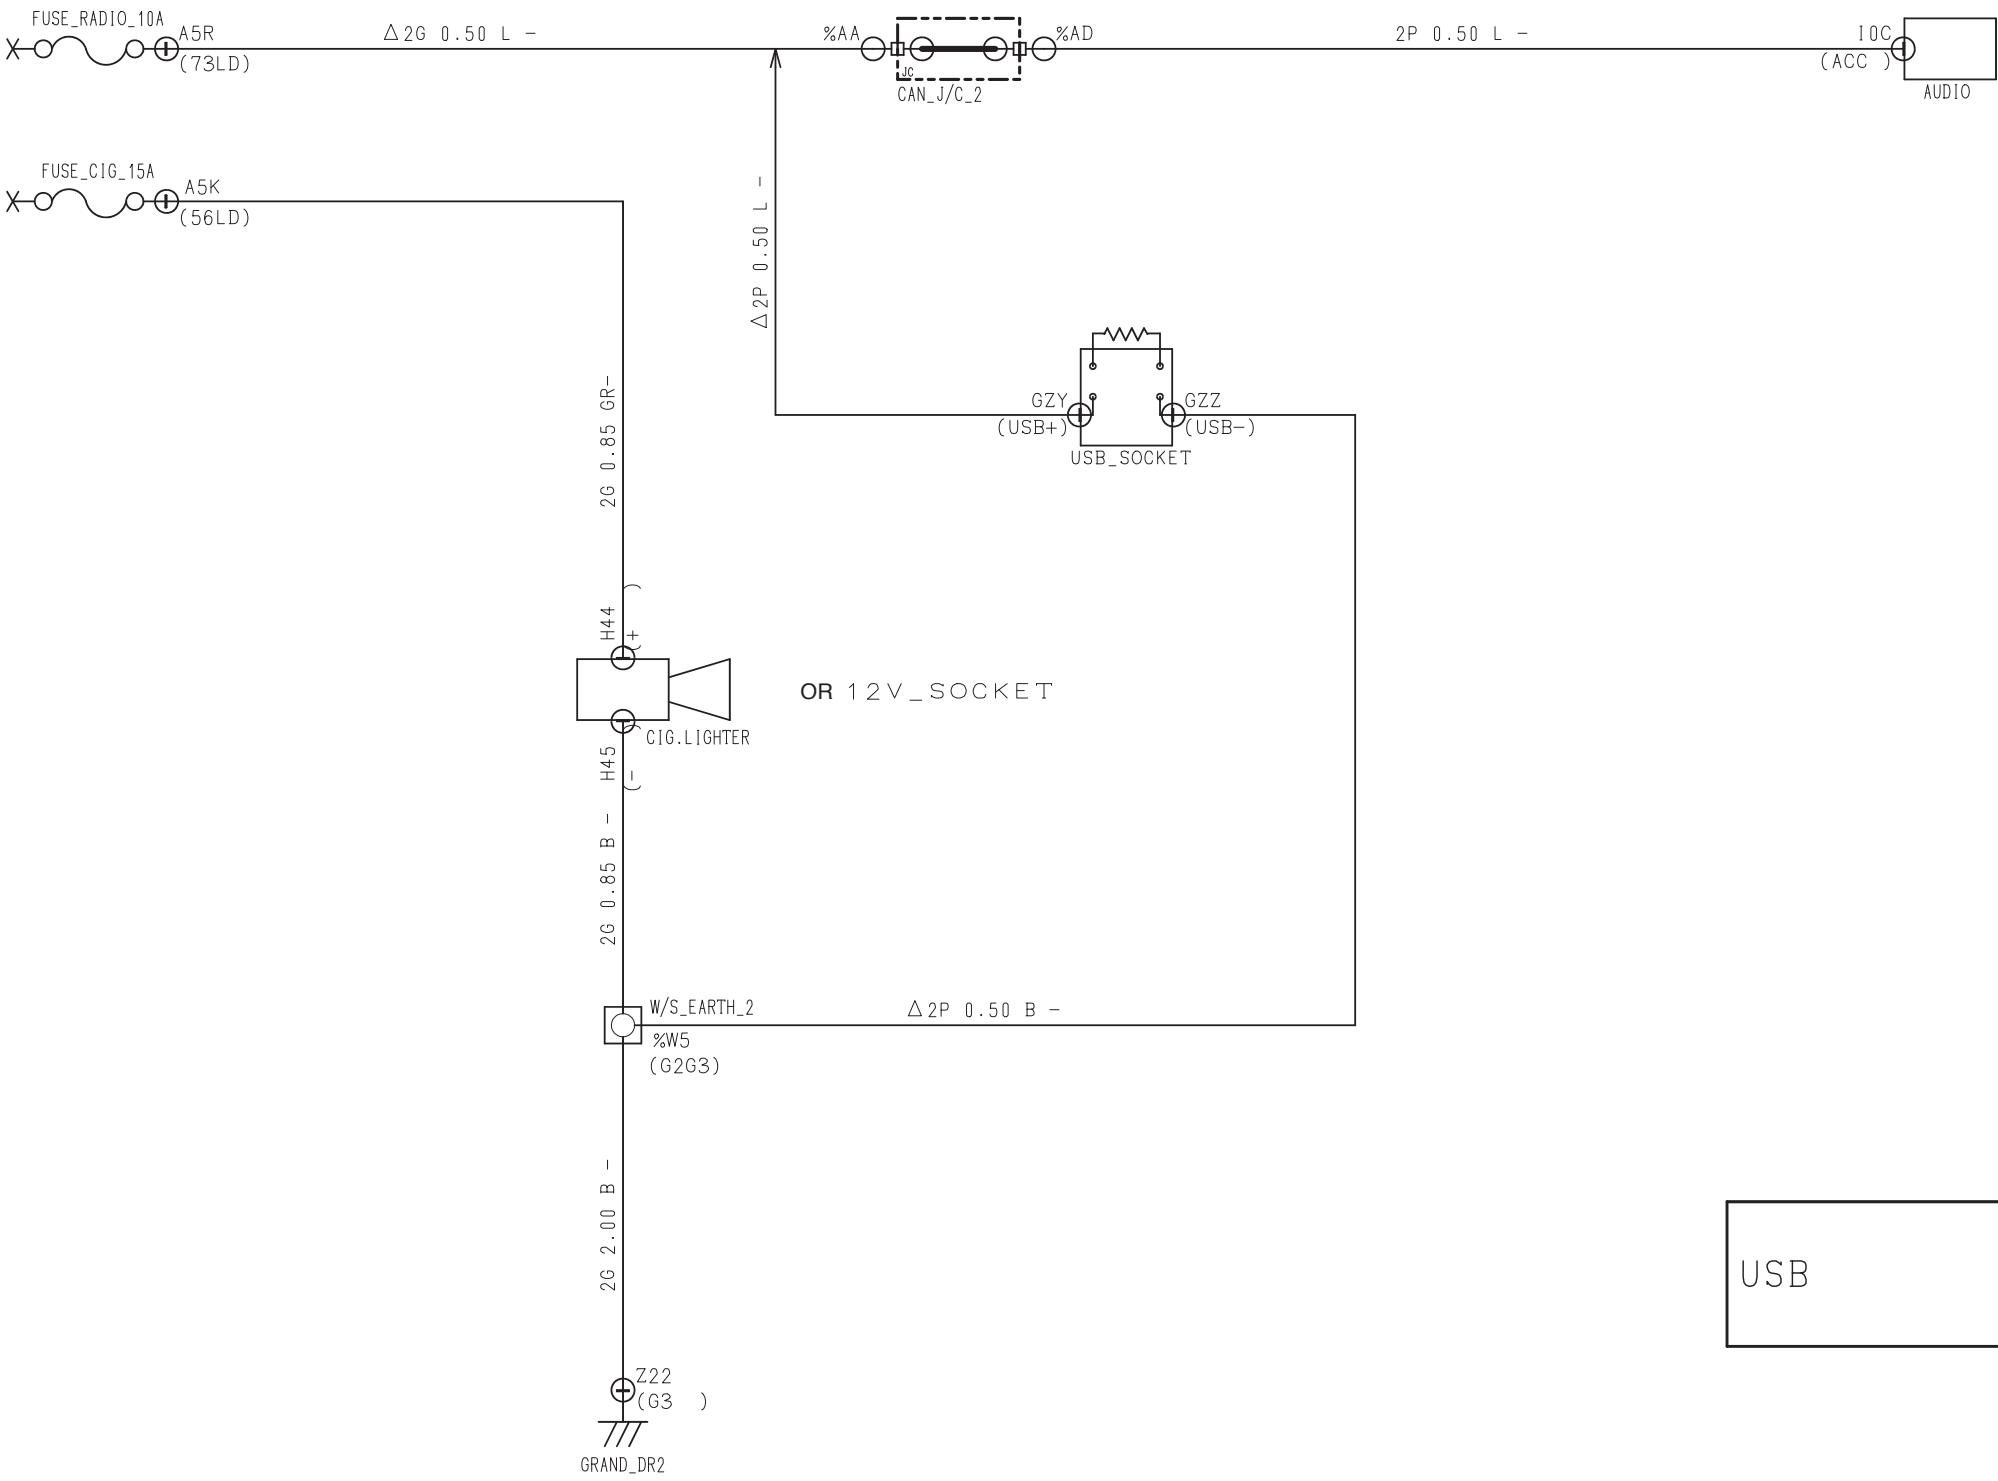


## 20. AIR HORN CIRCUIT

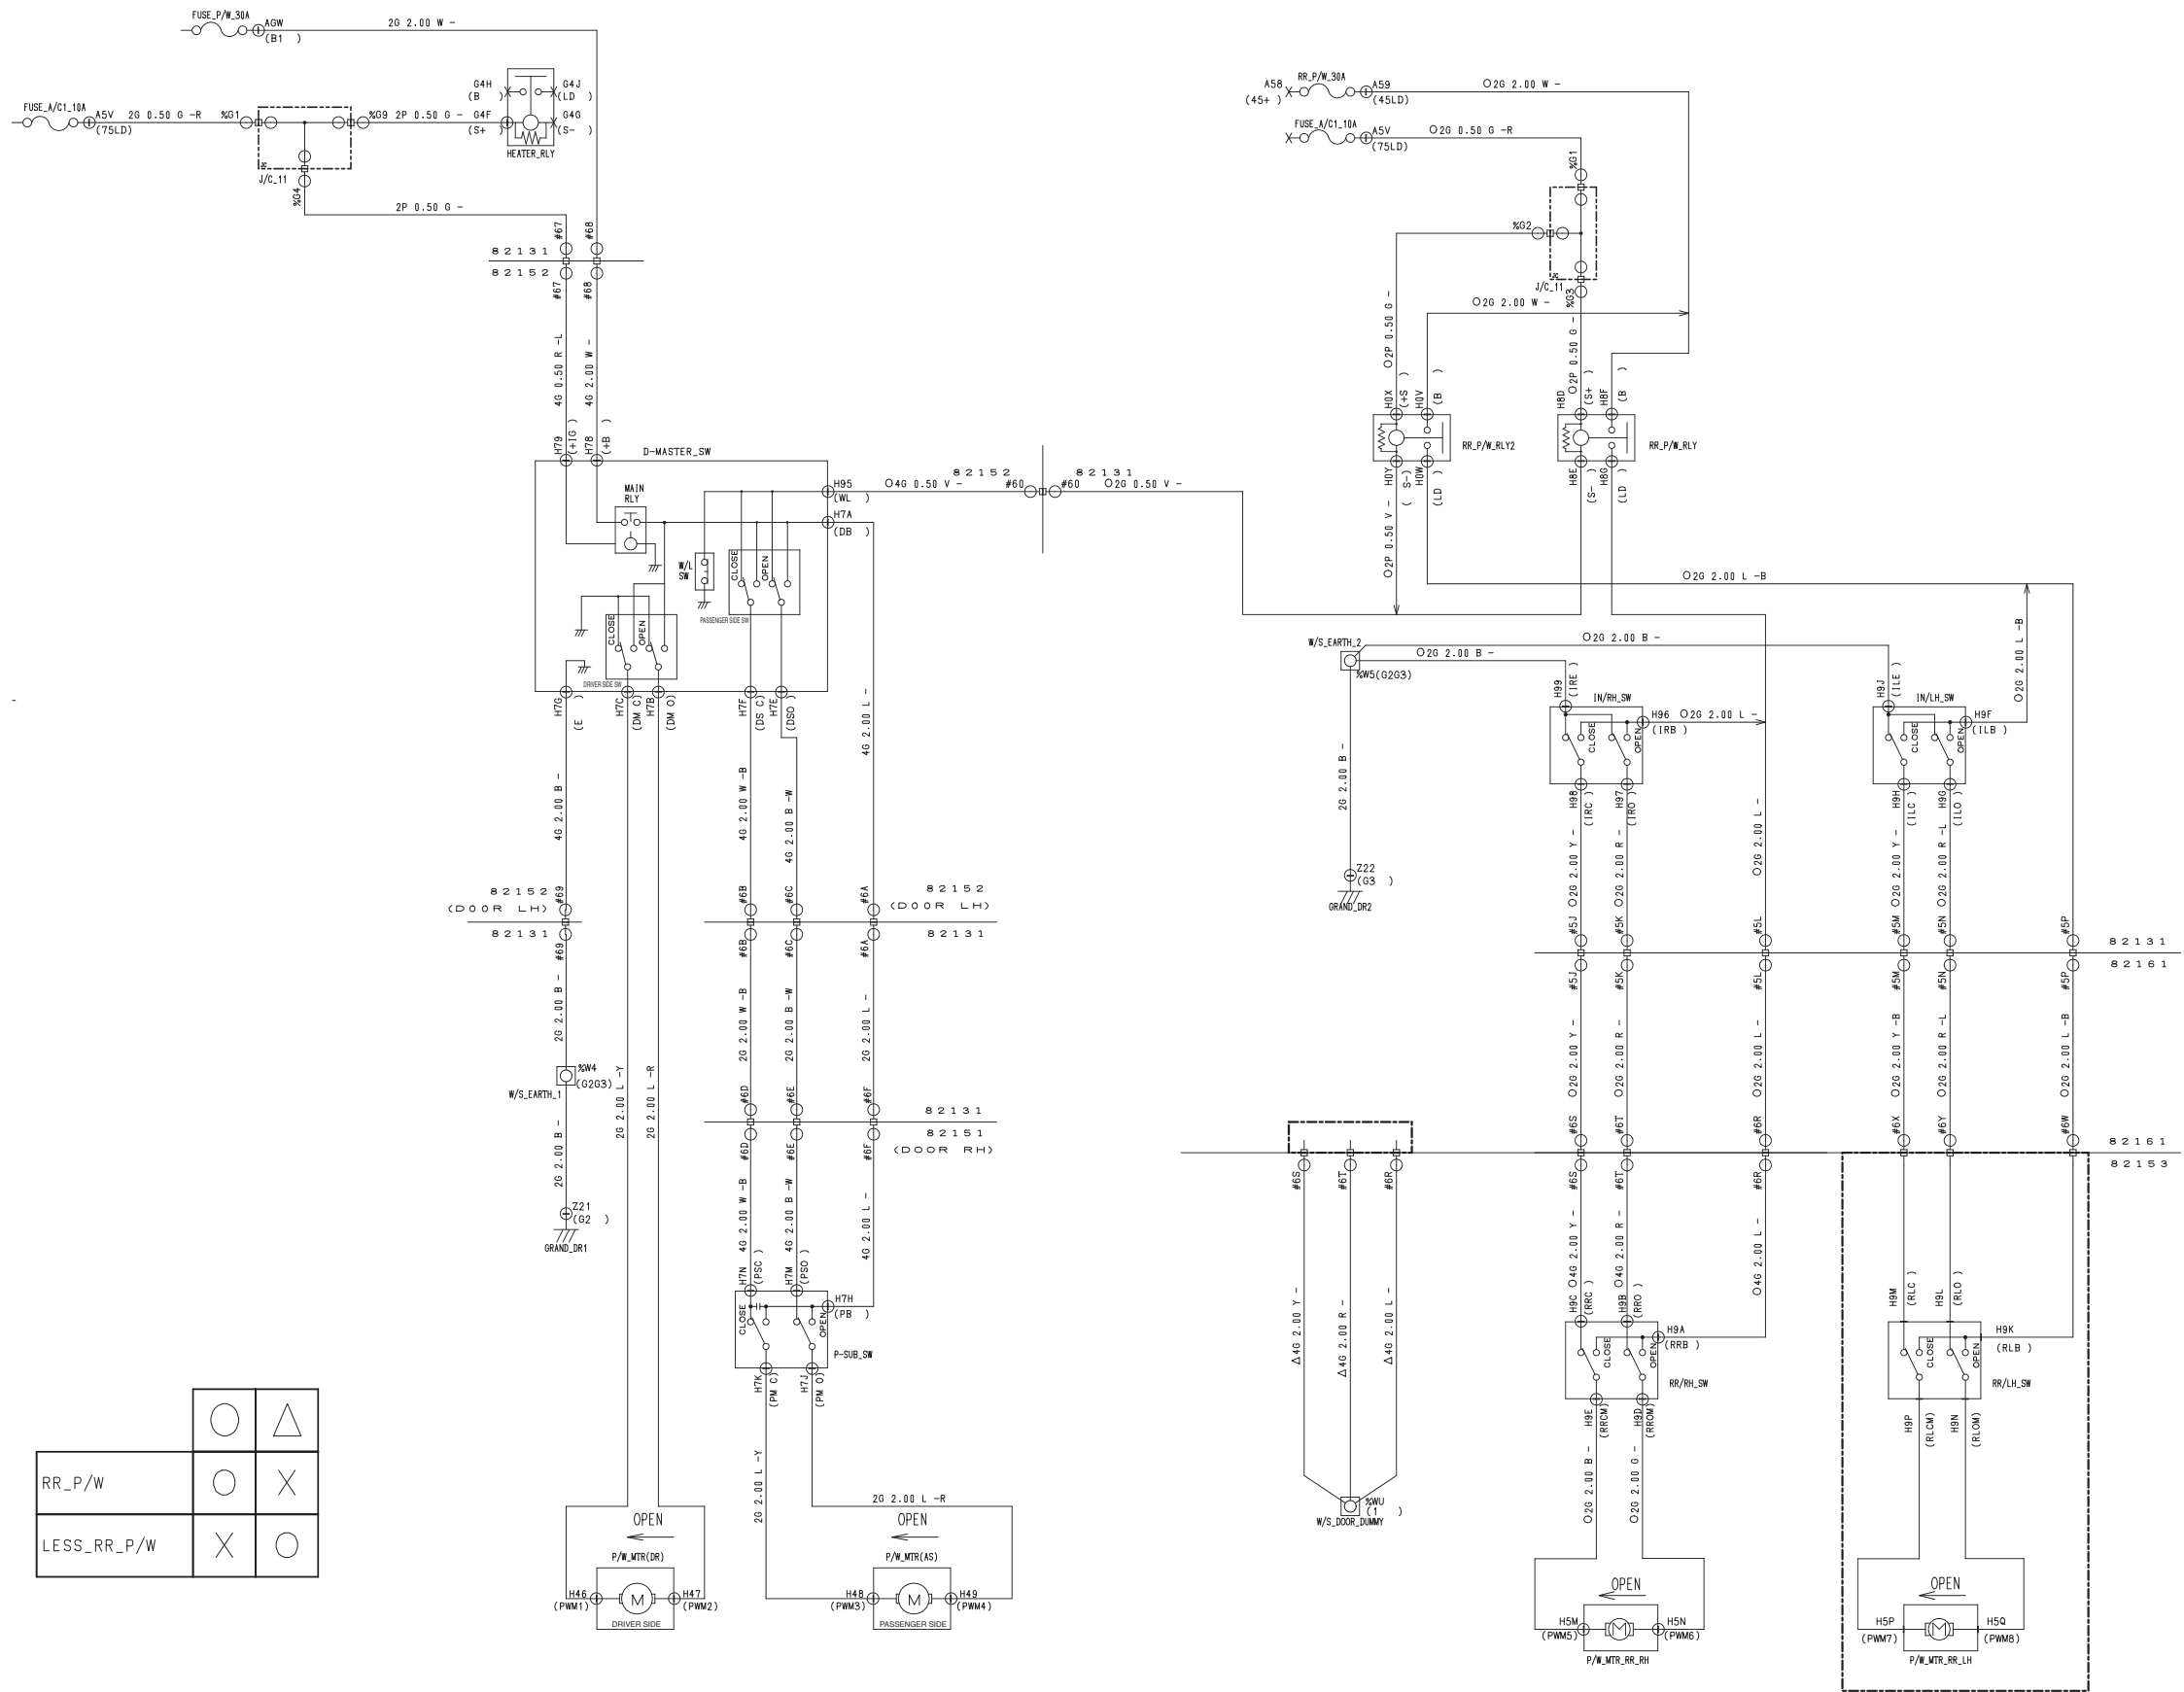


21. CIGARETTE LIGHTER & ACC. SOCKET CIRCUIT

8 2 1 3 1



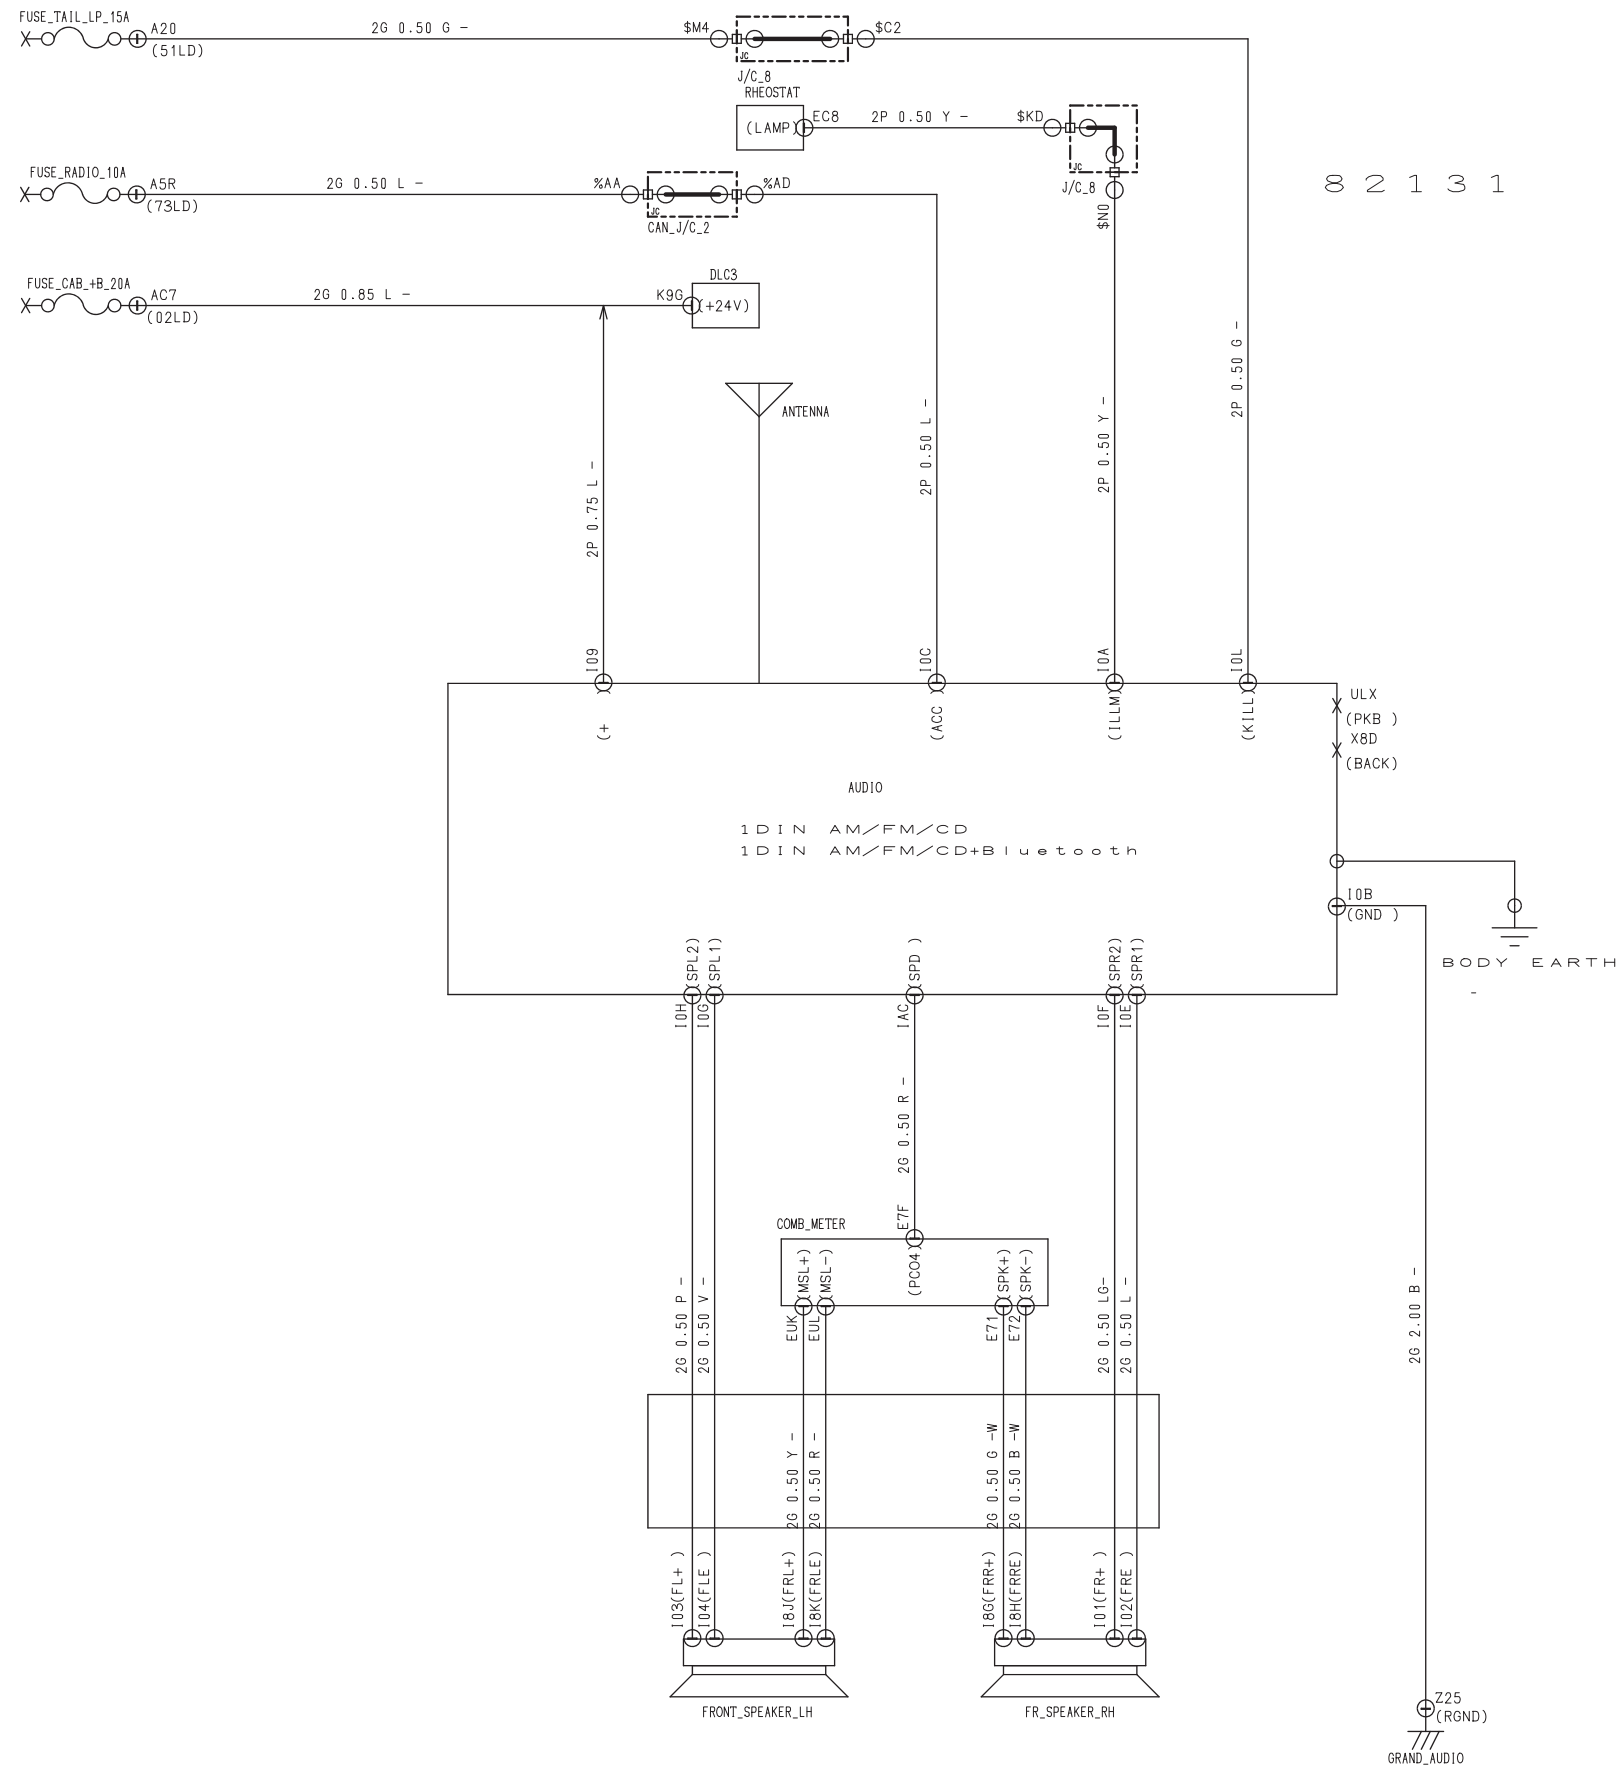
22. POWER WINDOW CIRCUIT



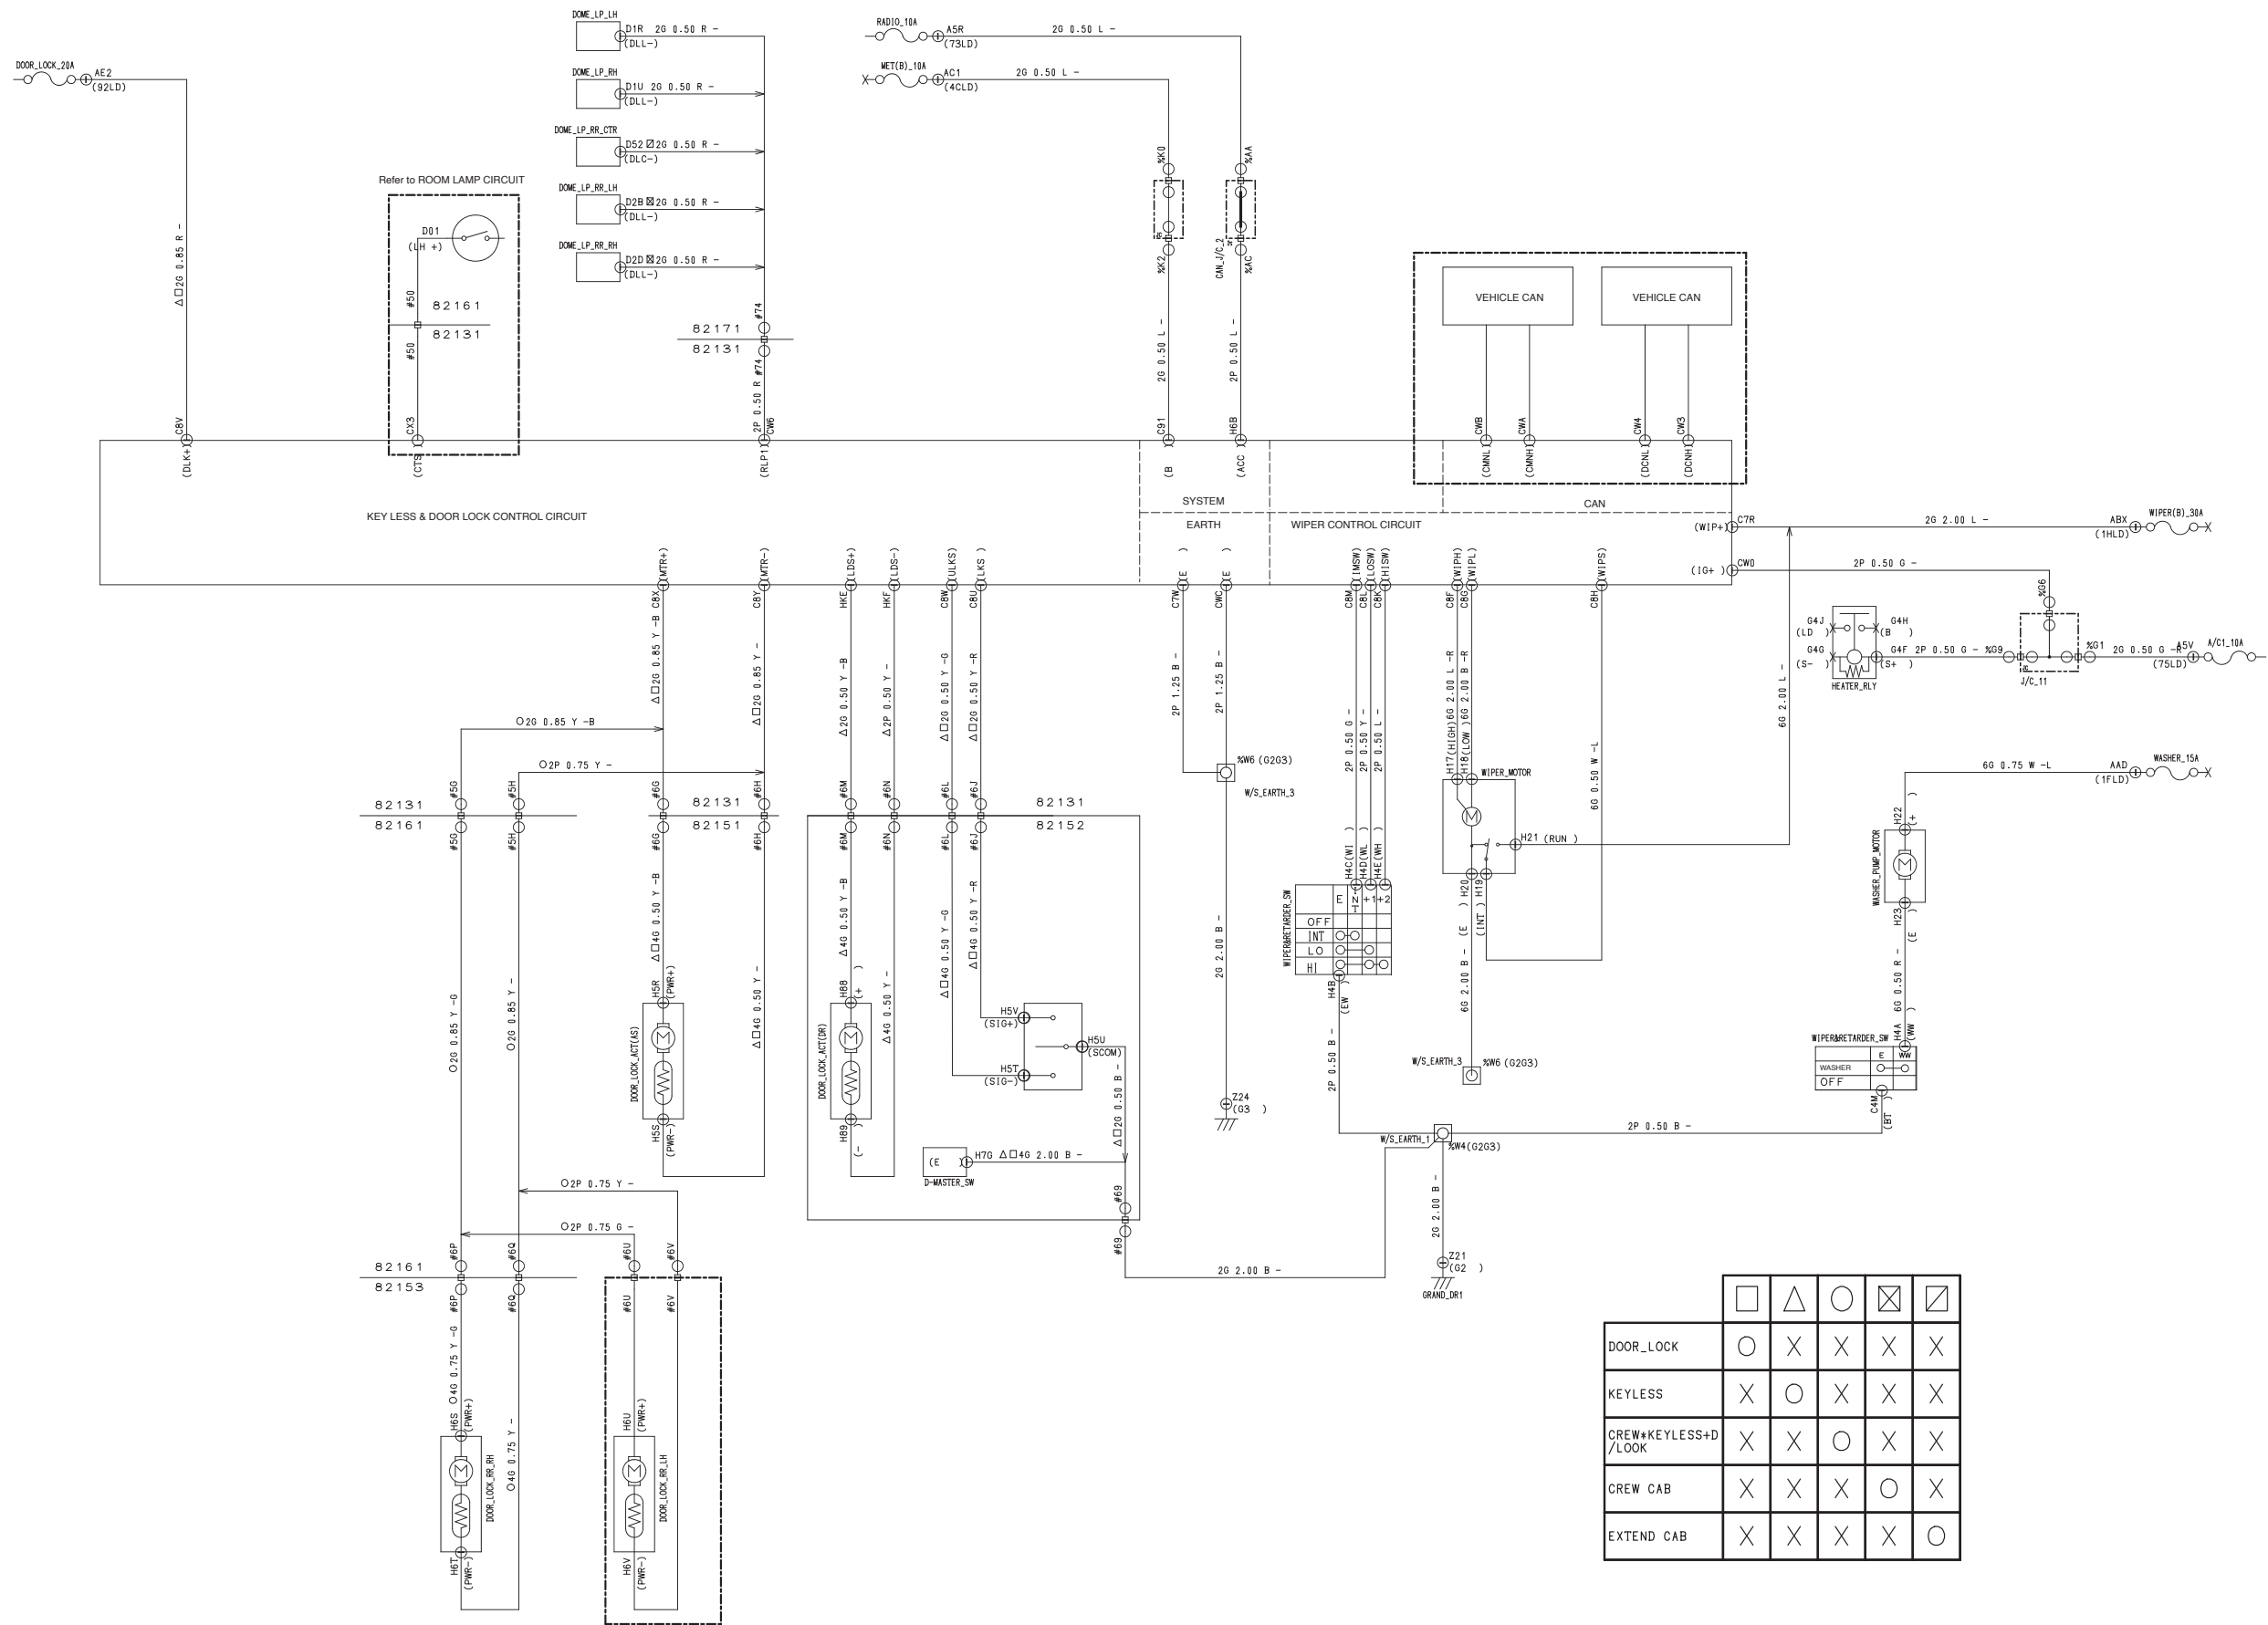
RR_P/W		
LESS_RR_P/W		



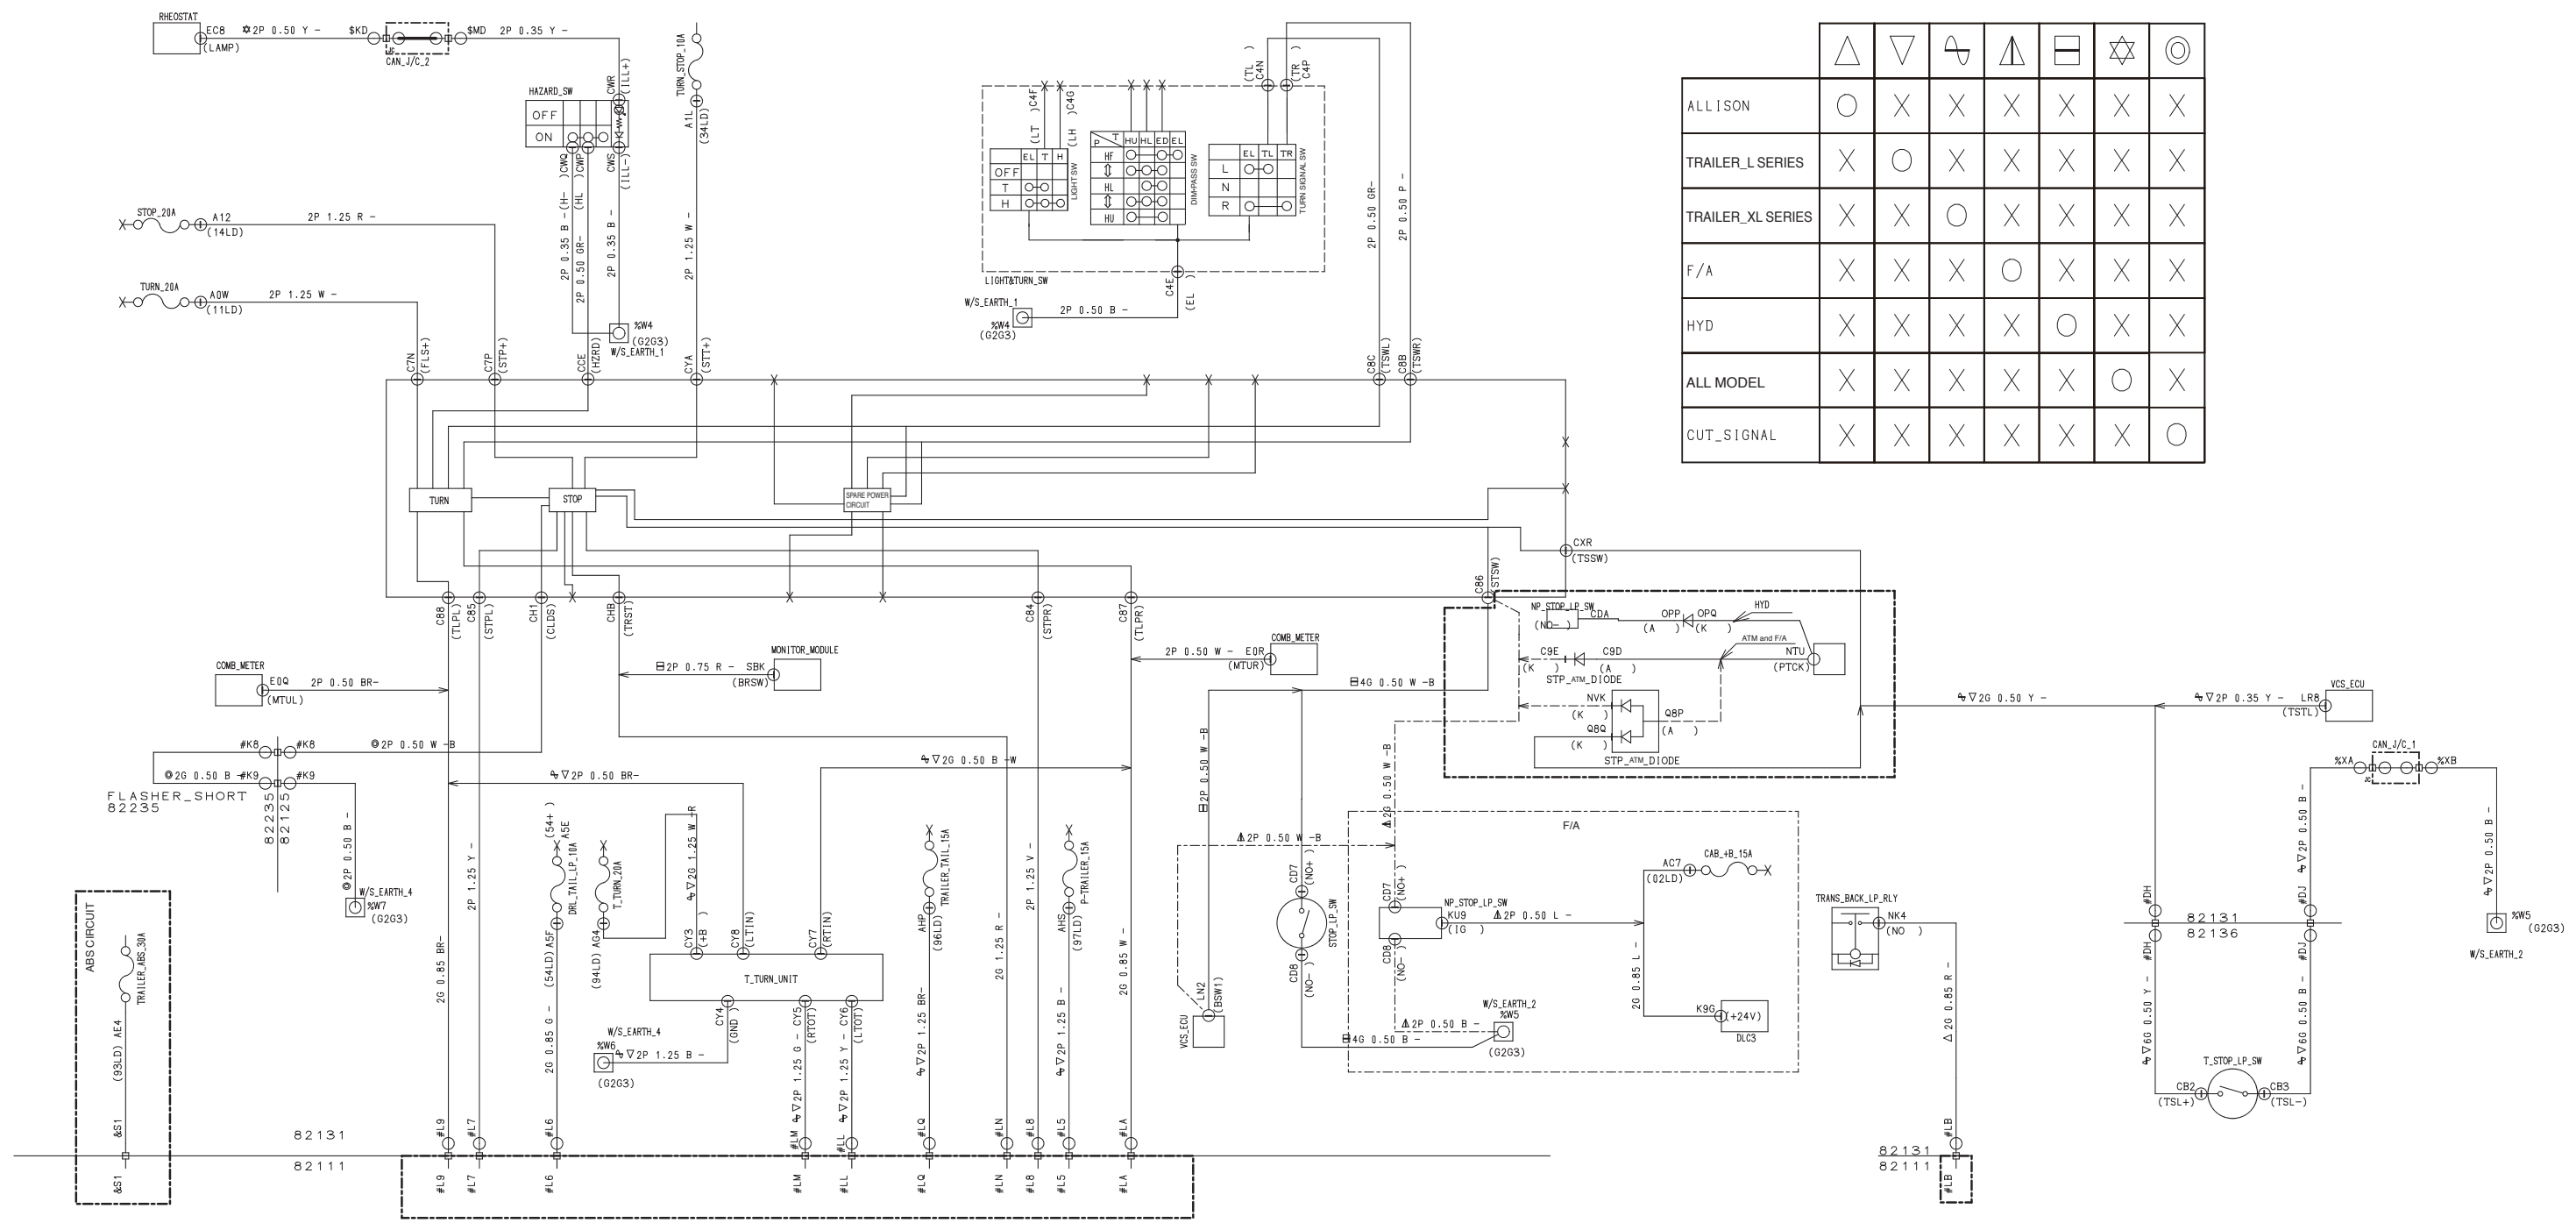
8 2 1 3 1



24. BODY CONTROL CIRCUIT\_POWER D/L & KEY LESS ENTRY

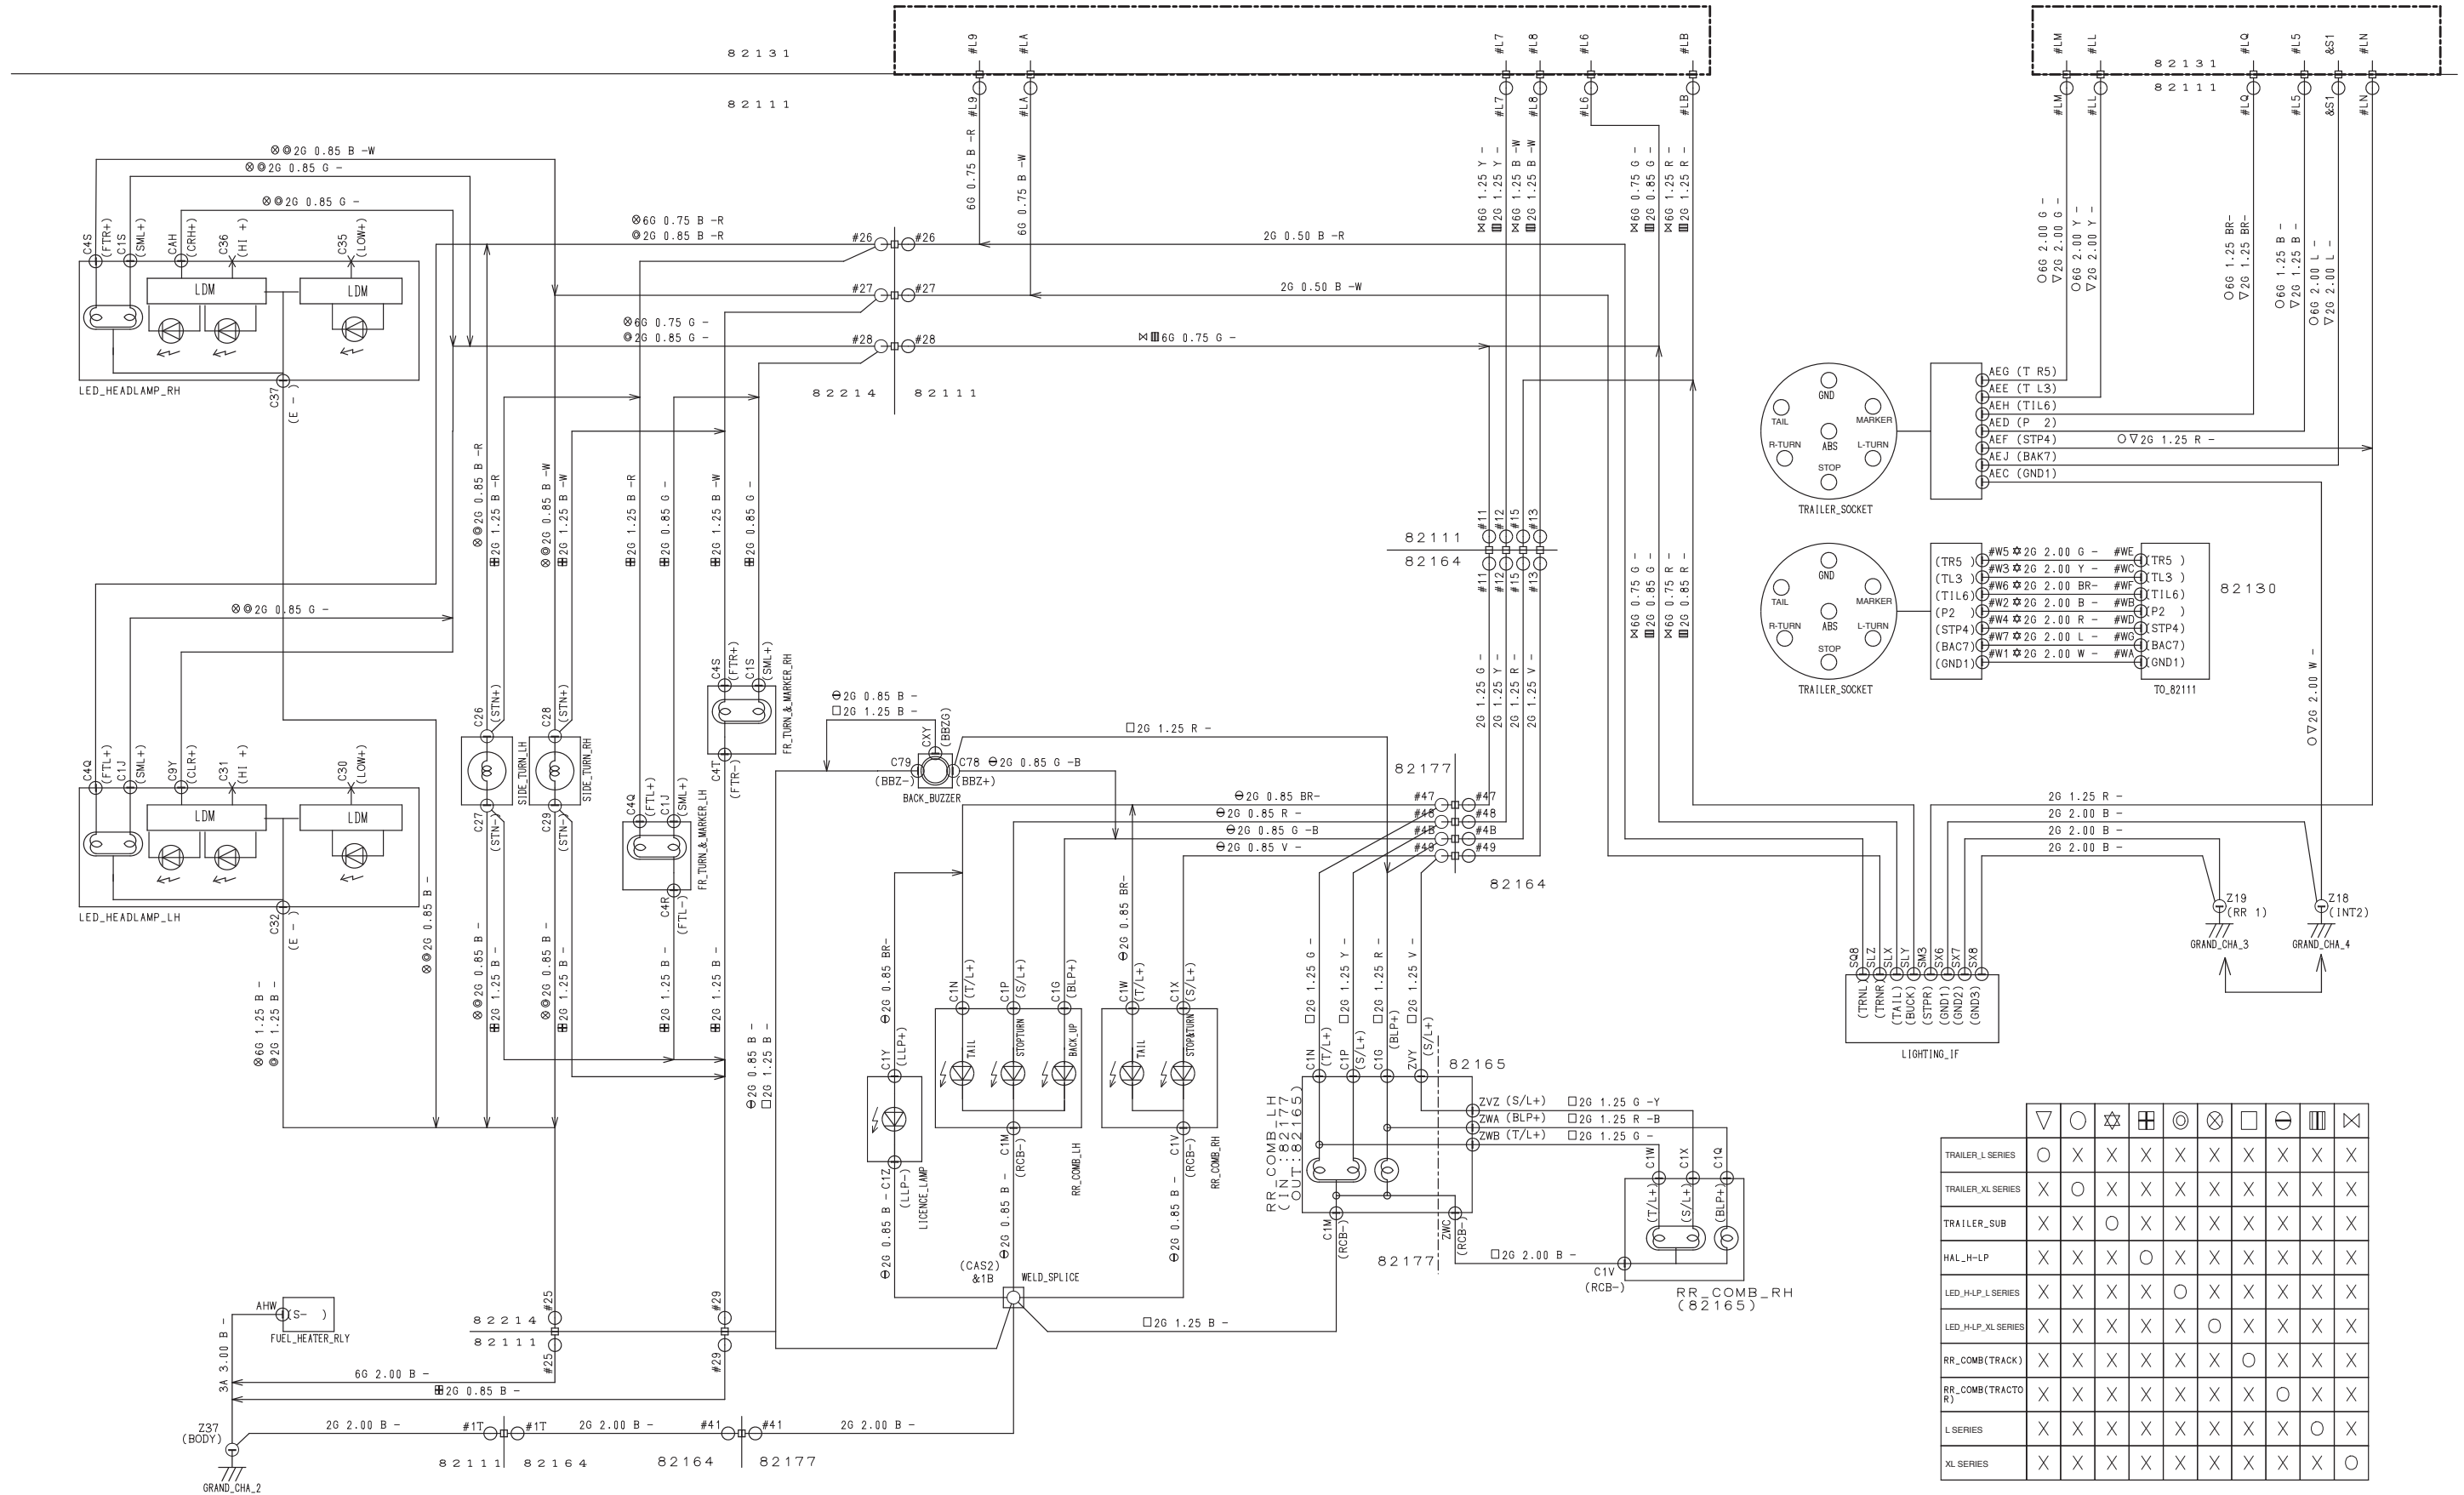


25. BODY CONTROL CIRCUIT\_CAB



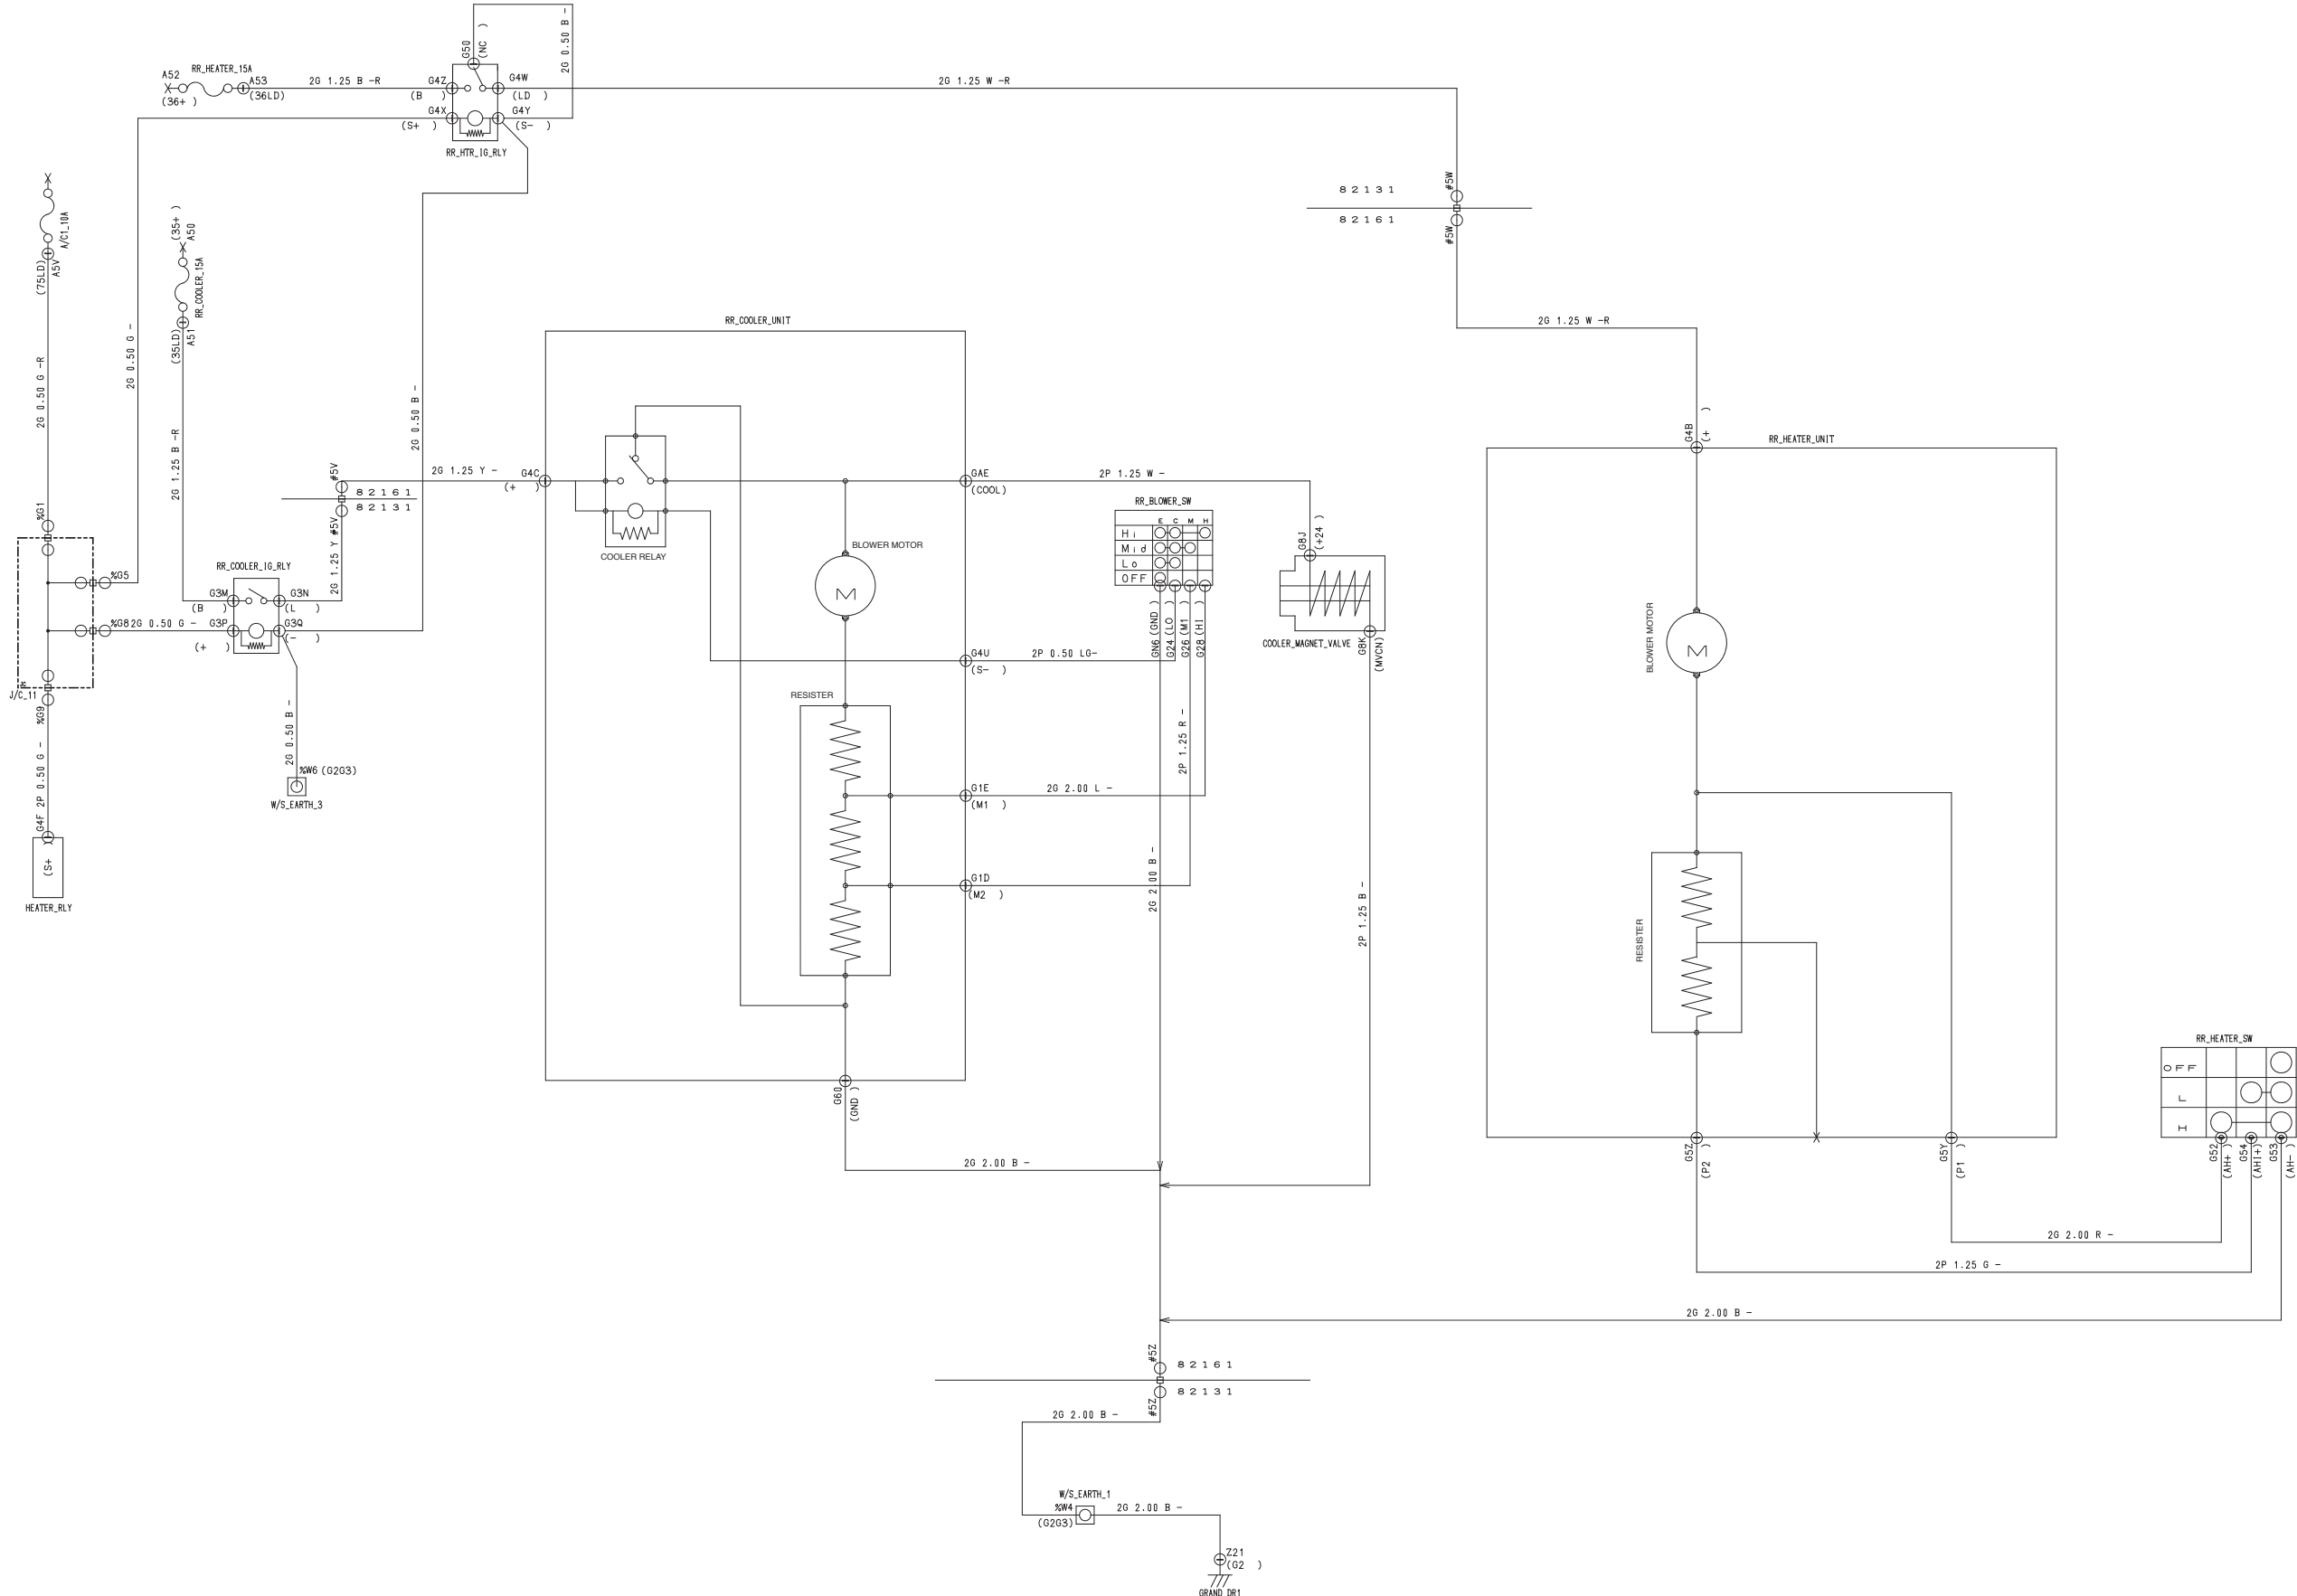
ALLISON		X	X	X	X	X	X
TRAILER_L SERIES	X		X	X	X	X	X
TRAILER_XL SERIES	X	X		X	X	X	X
F/A	X	X	X		X	X	X
HYD	X	X	X	X		X	X
ALL MODEL	X	X	X	X	X		X
CUT_SIGNAL	X	X	X	X	X	X	

## 26. BODY CONTROL CIRCUIT\_CHASSIS

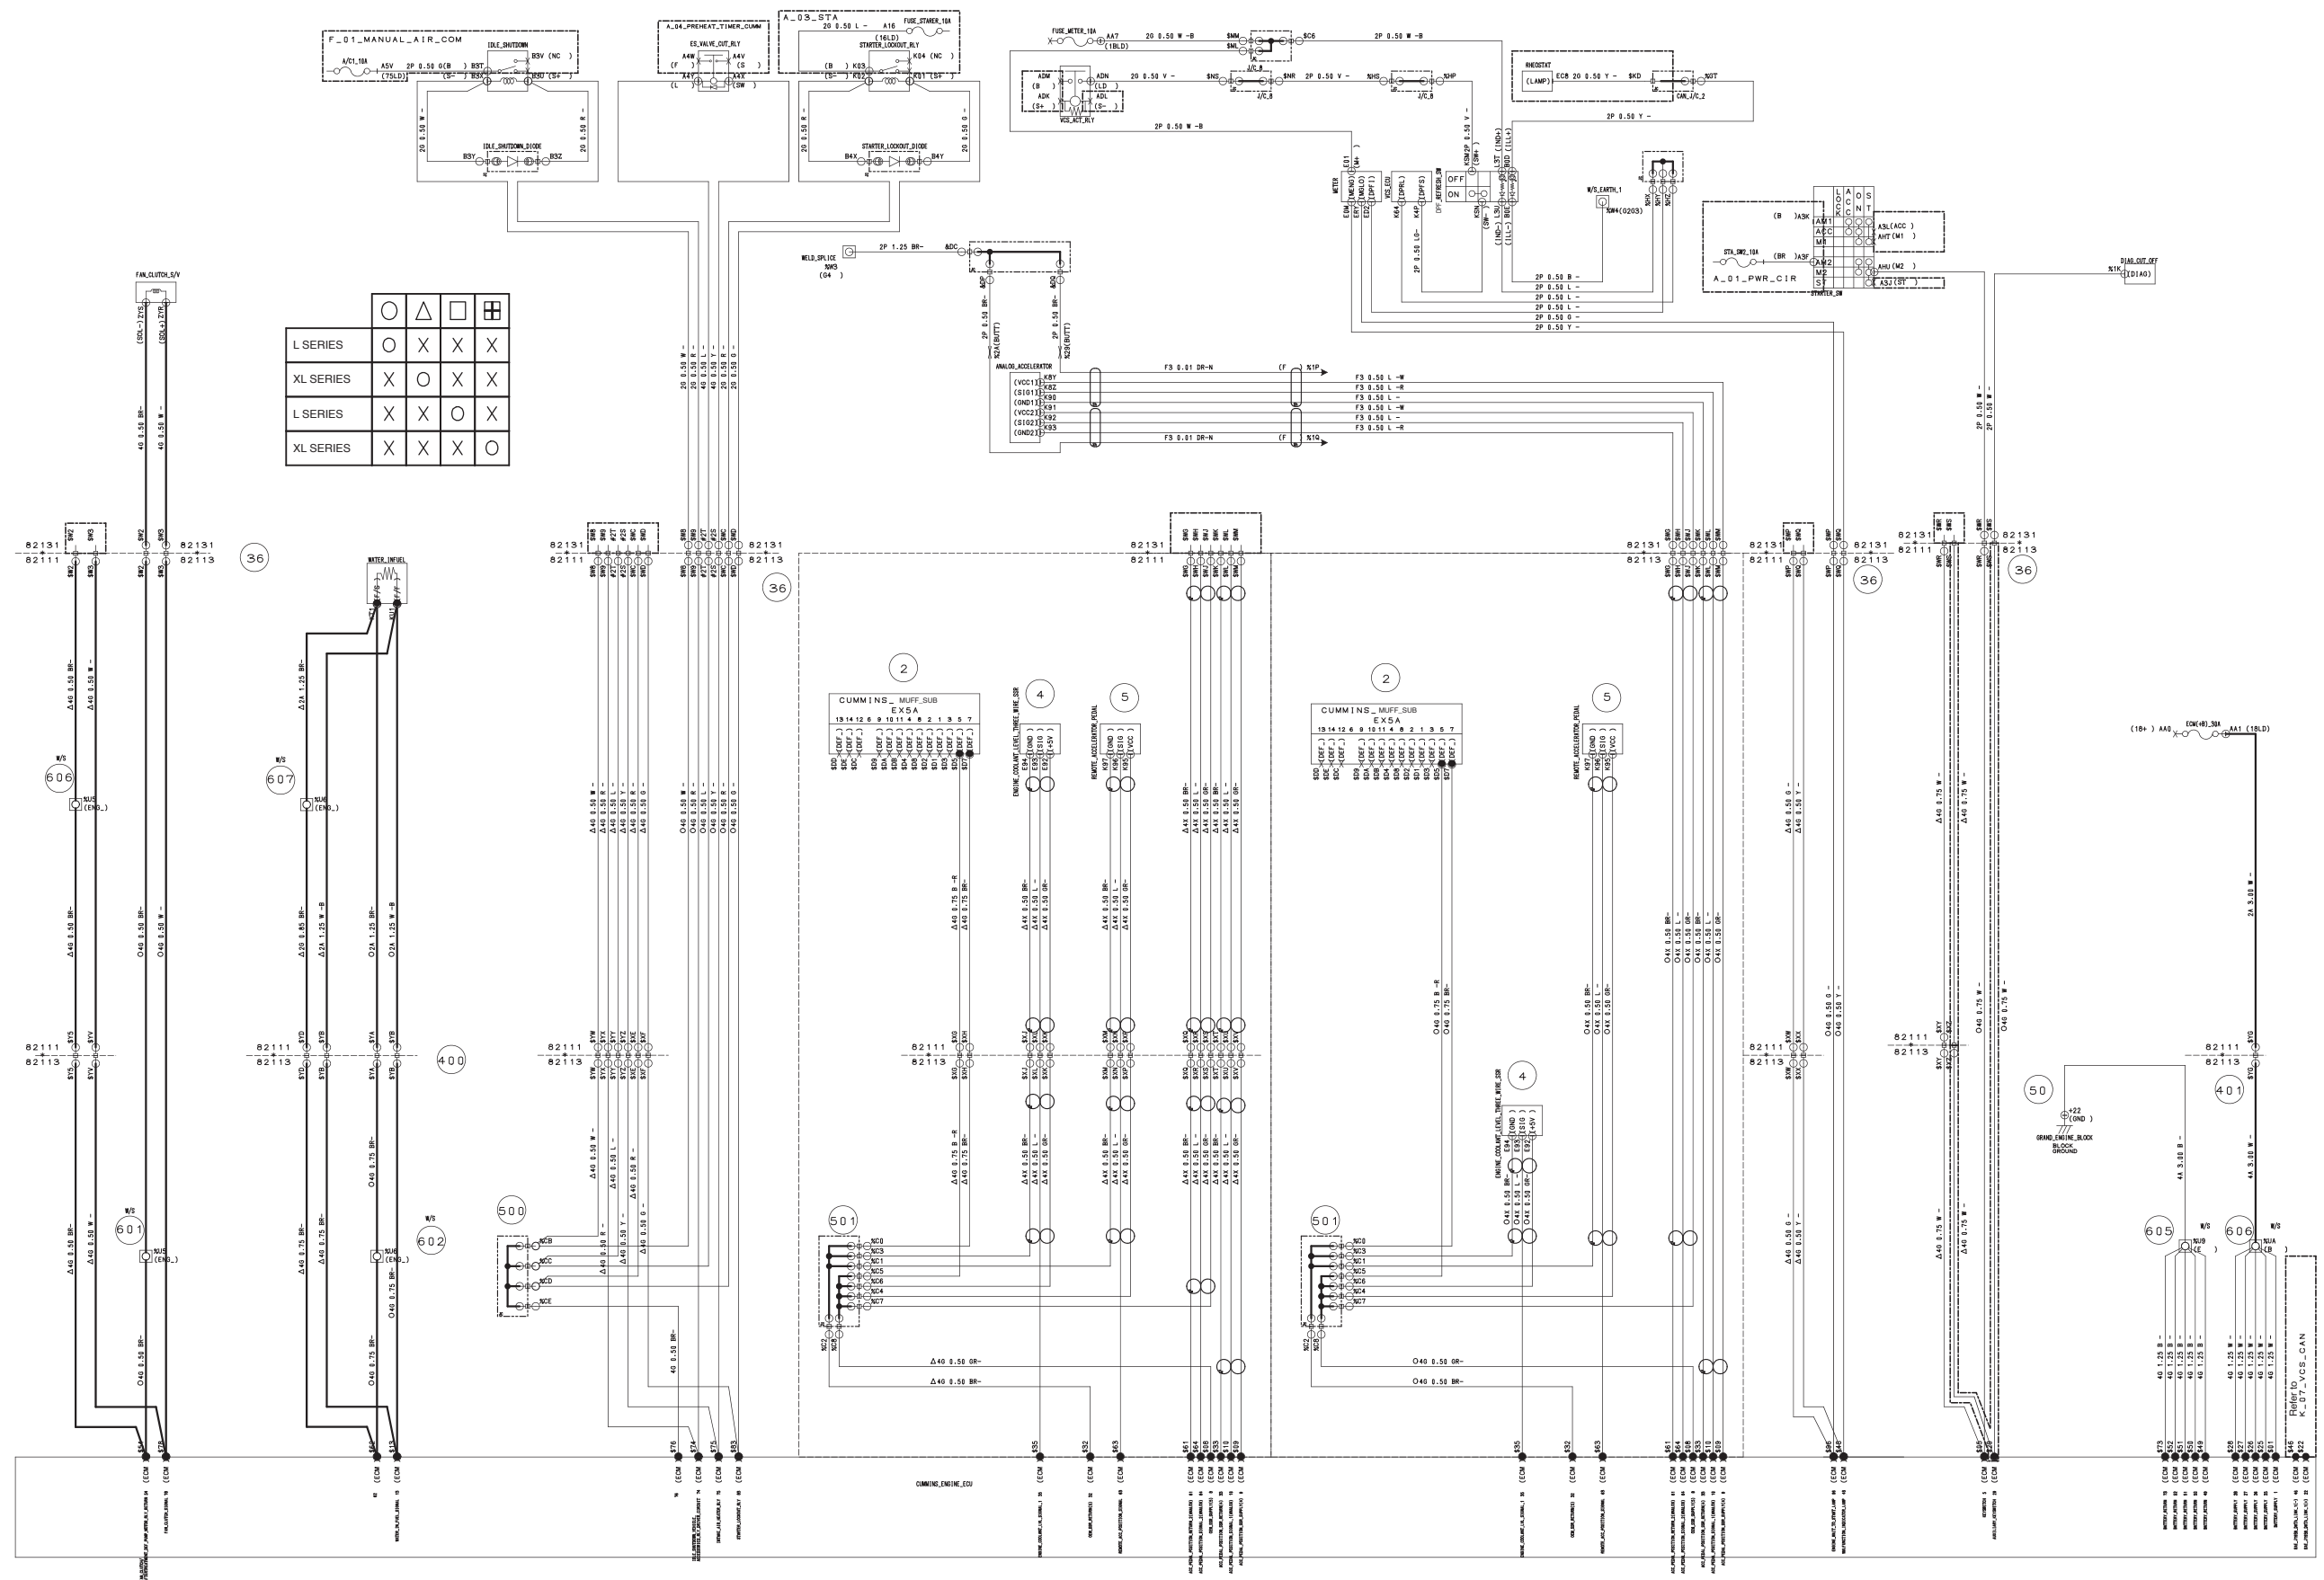


[illegible]

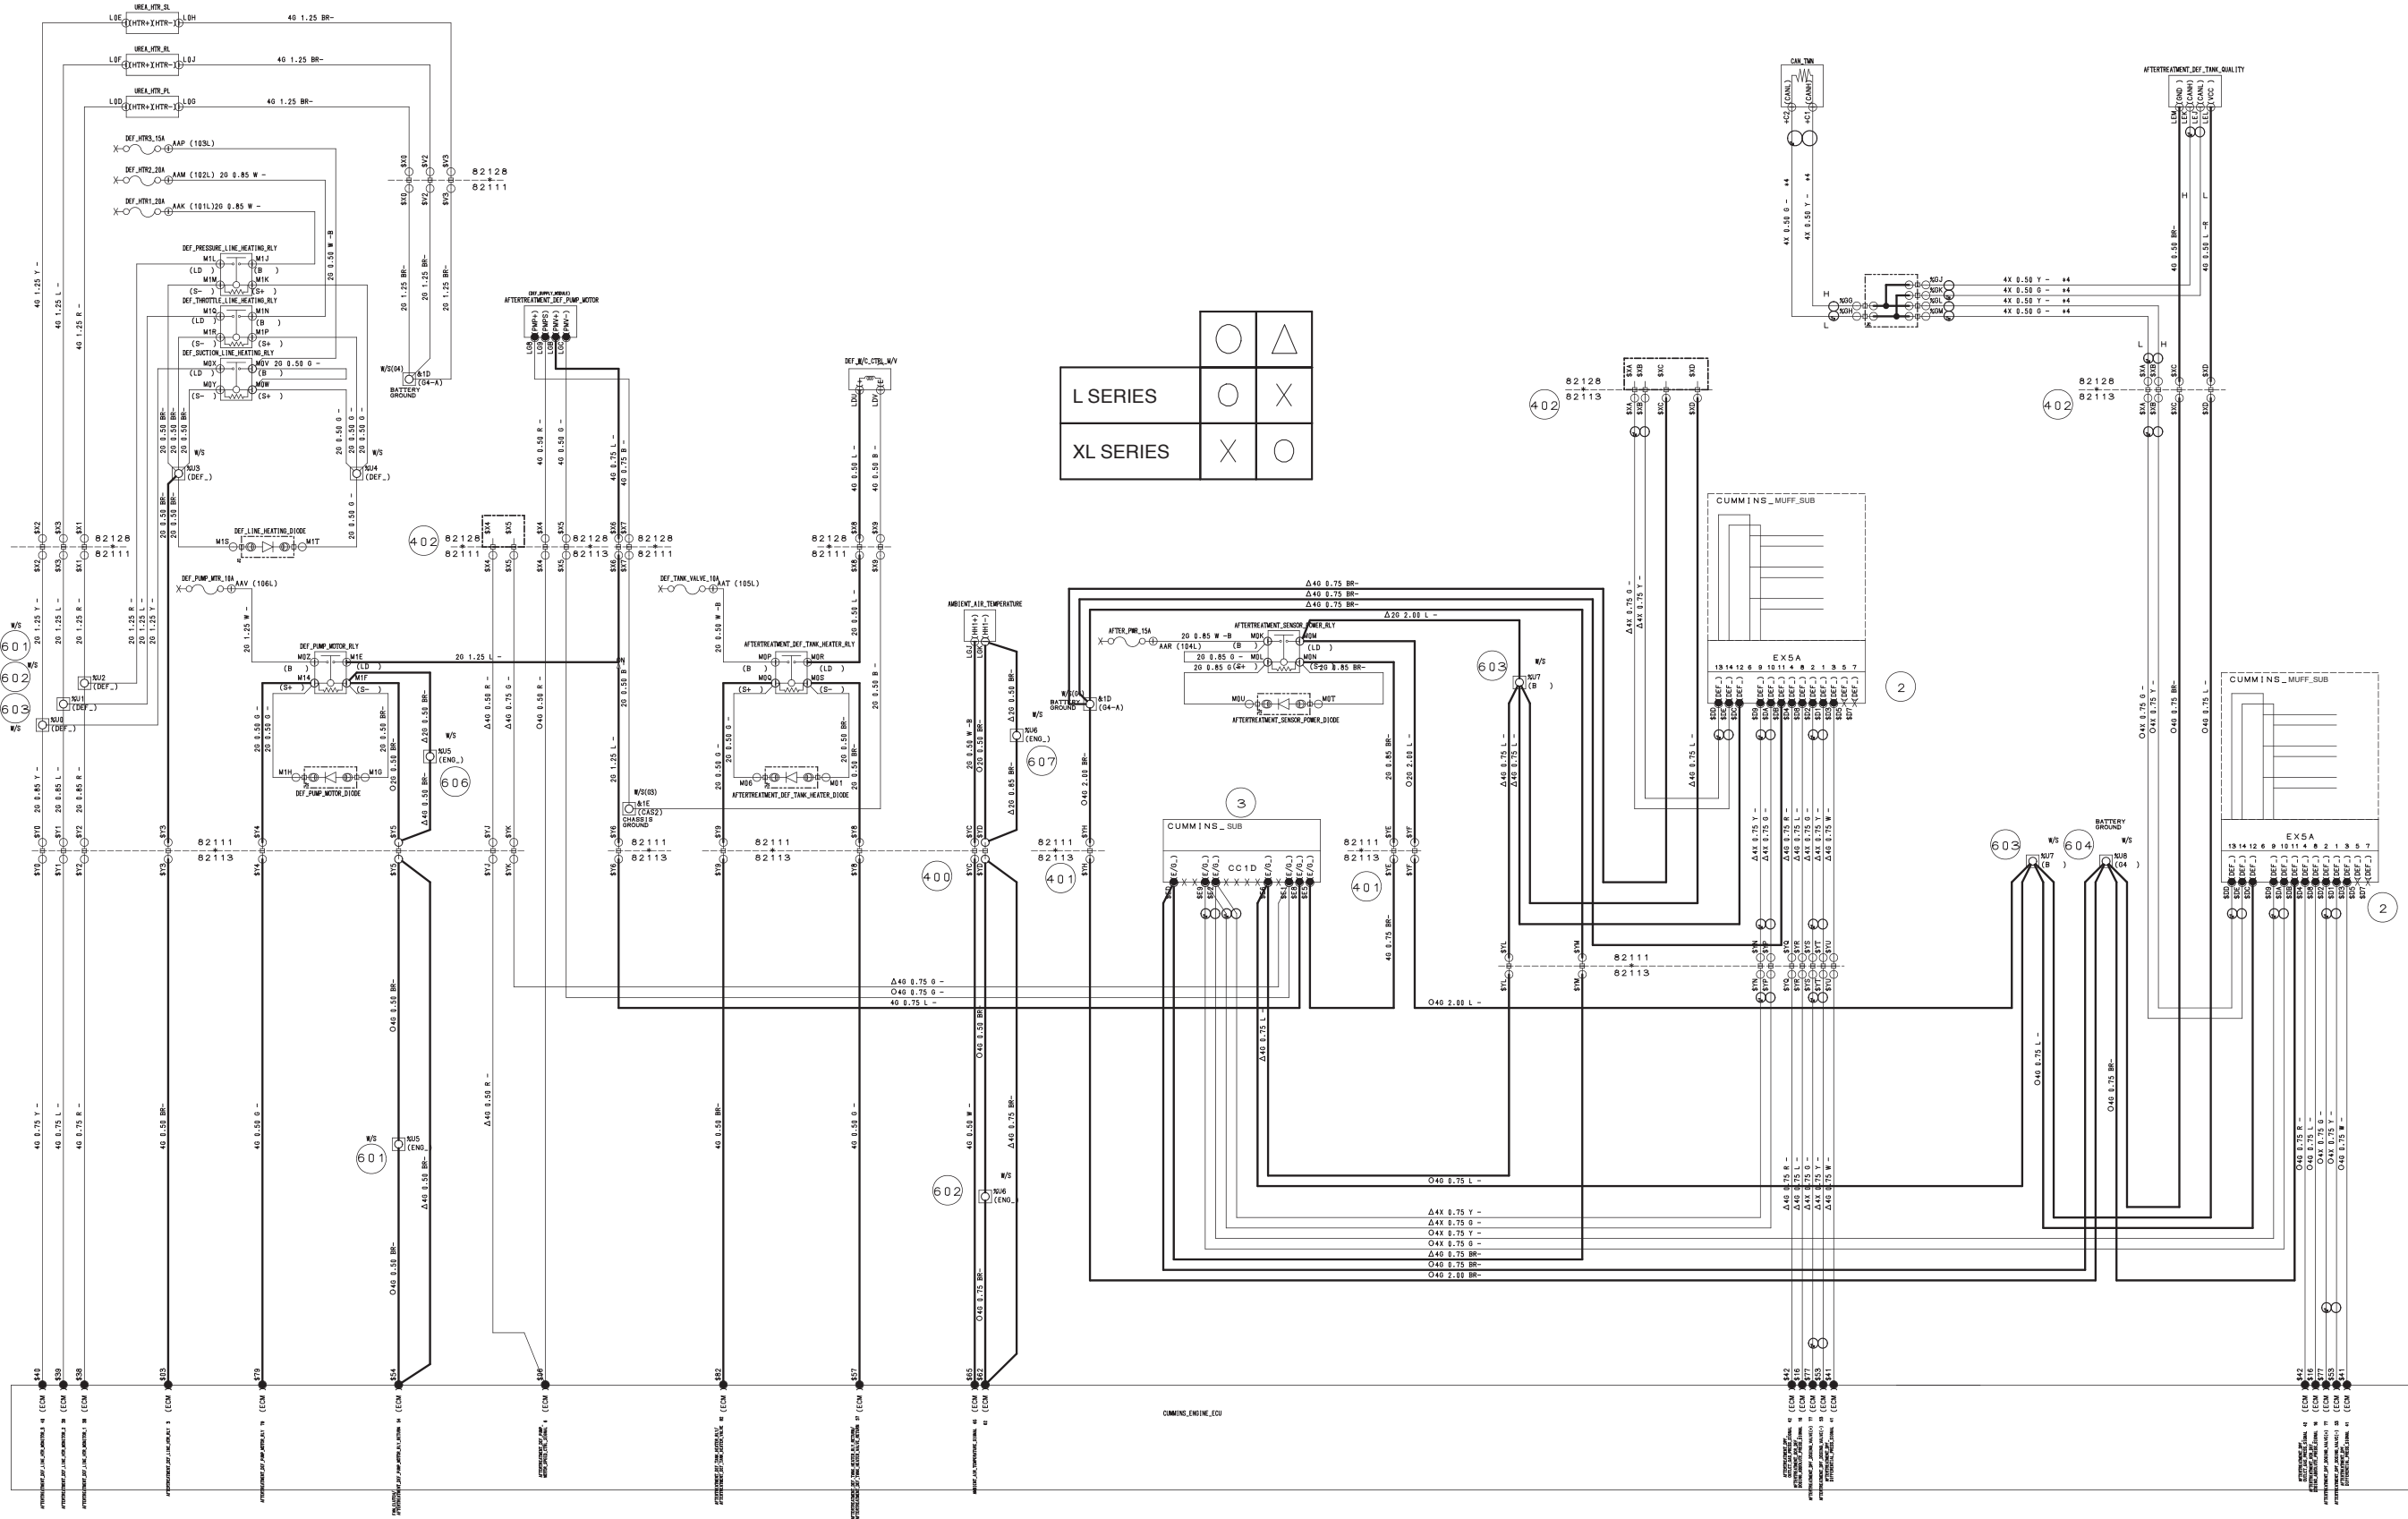
## 28. REAR COOLER & REAR HEATER CIRCUIT



## 29. CUMMINS ENGINE ECU & ECM CIRCUIT

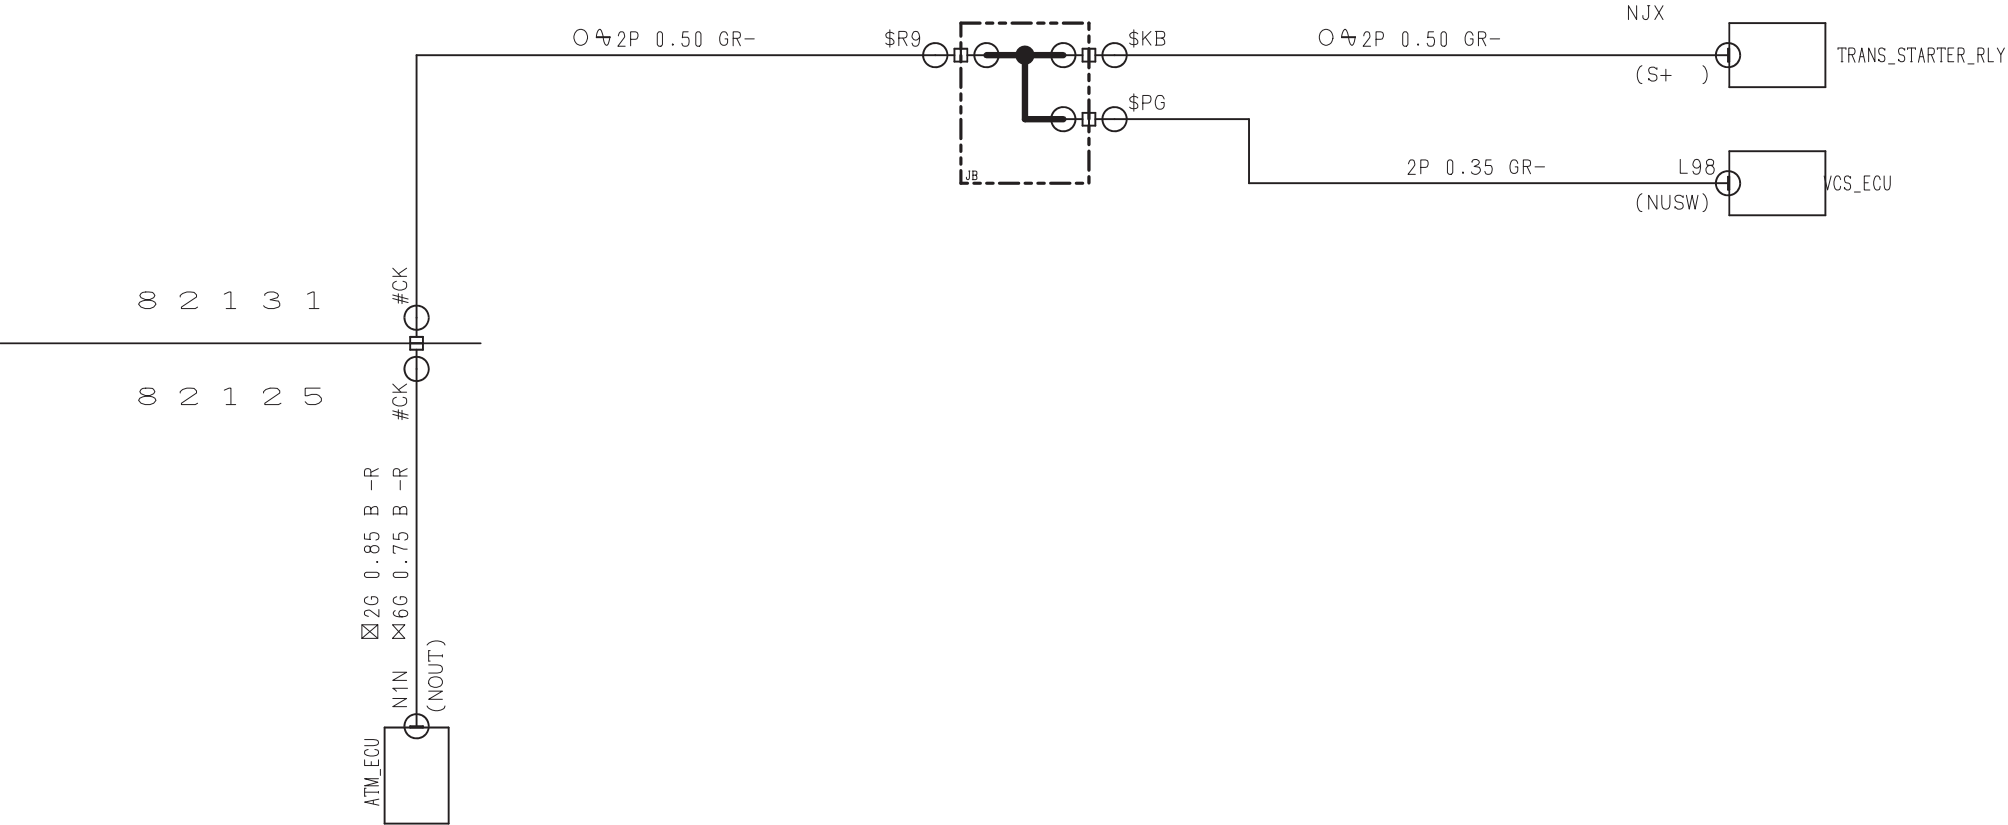


30. AFTERTRATMENT SYSTEM CIRCUIT

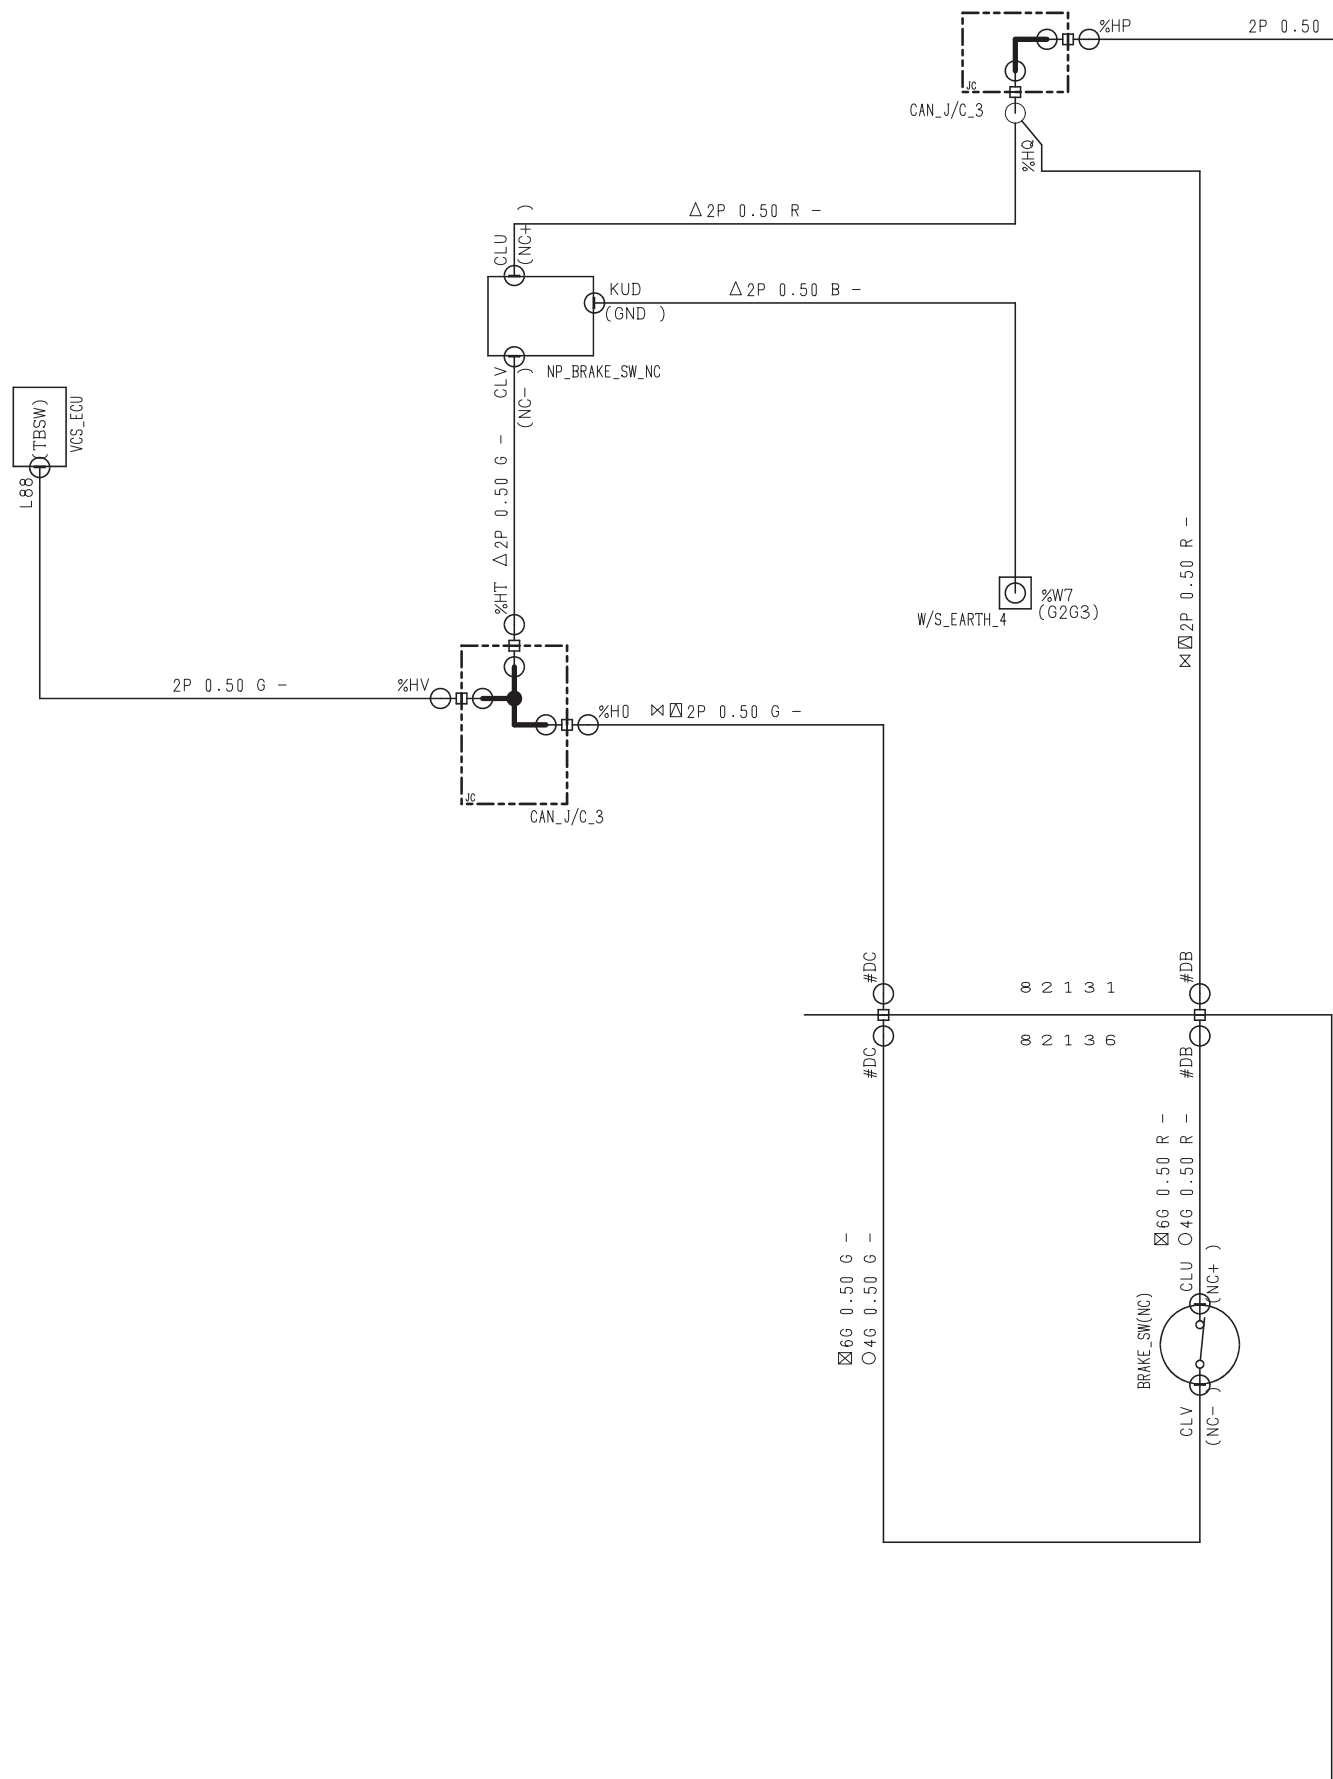


































31. COMMON RAIL CIRCUIT\_ATM EXHAUST BRAKE

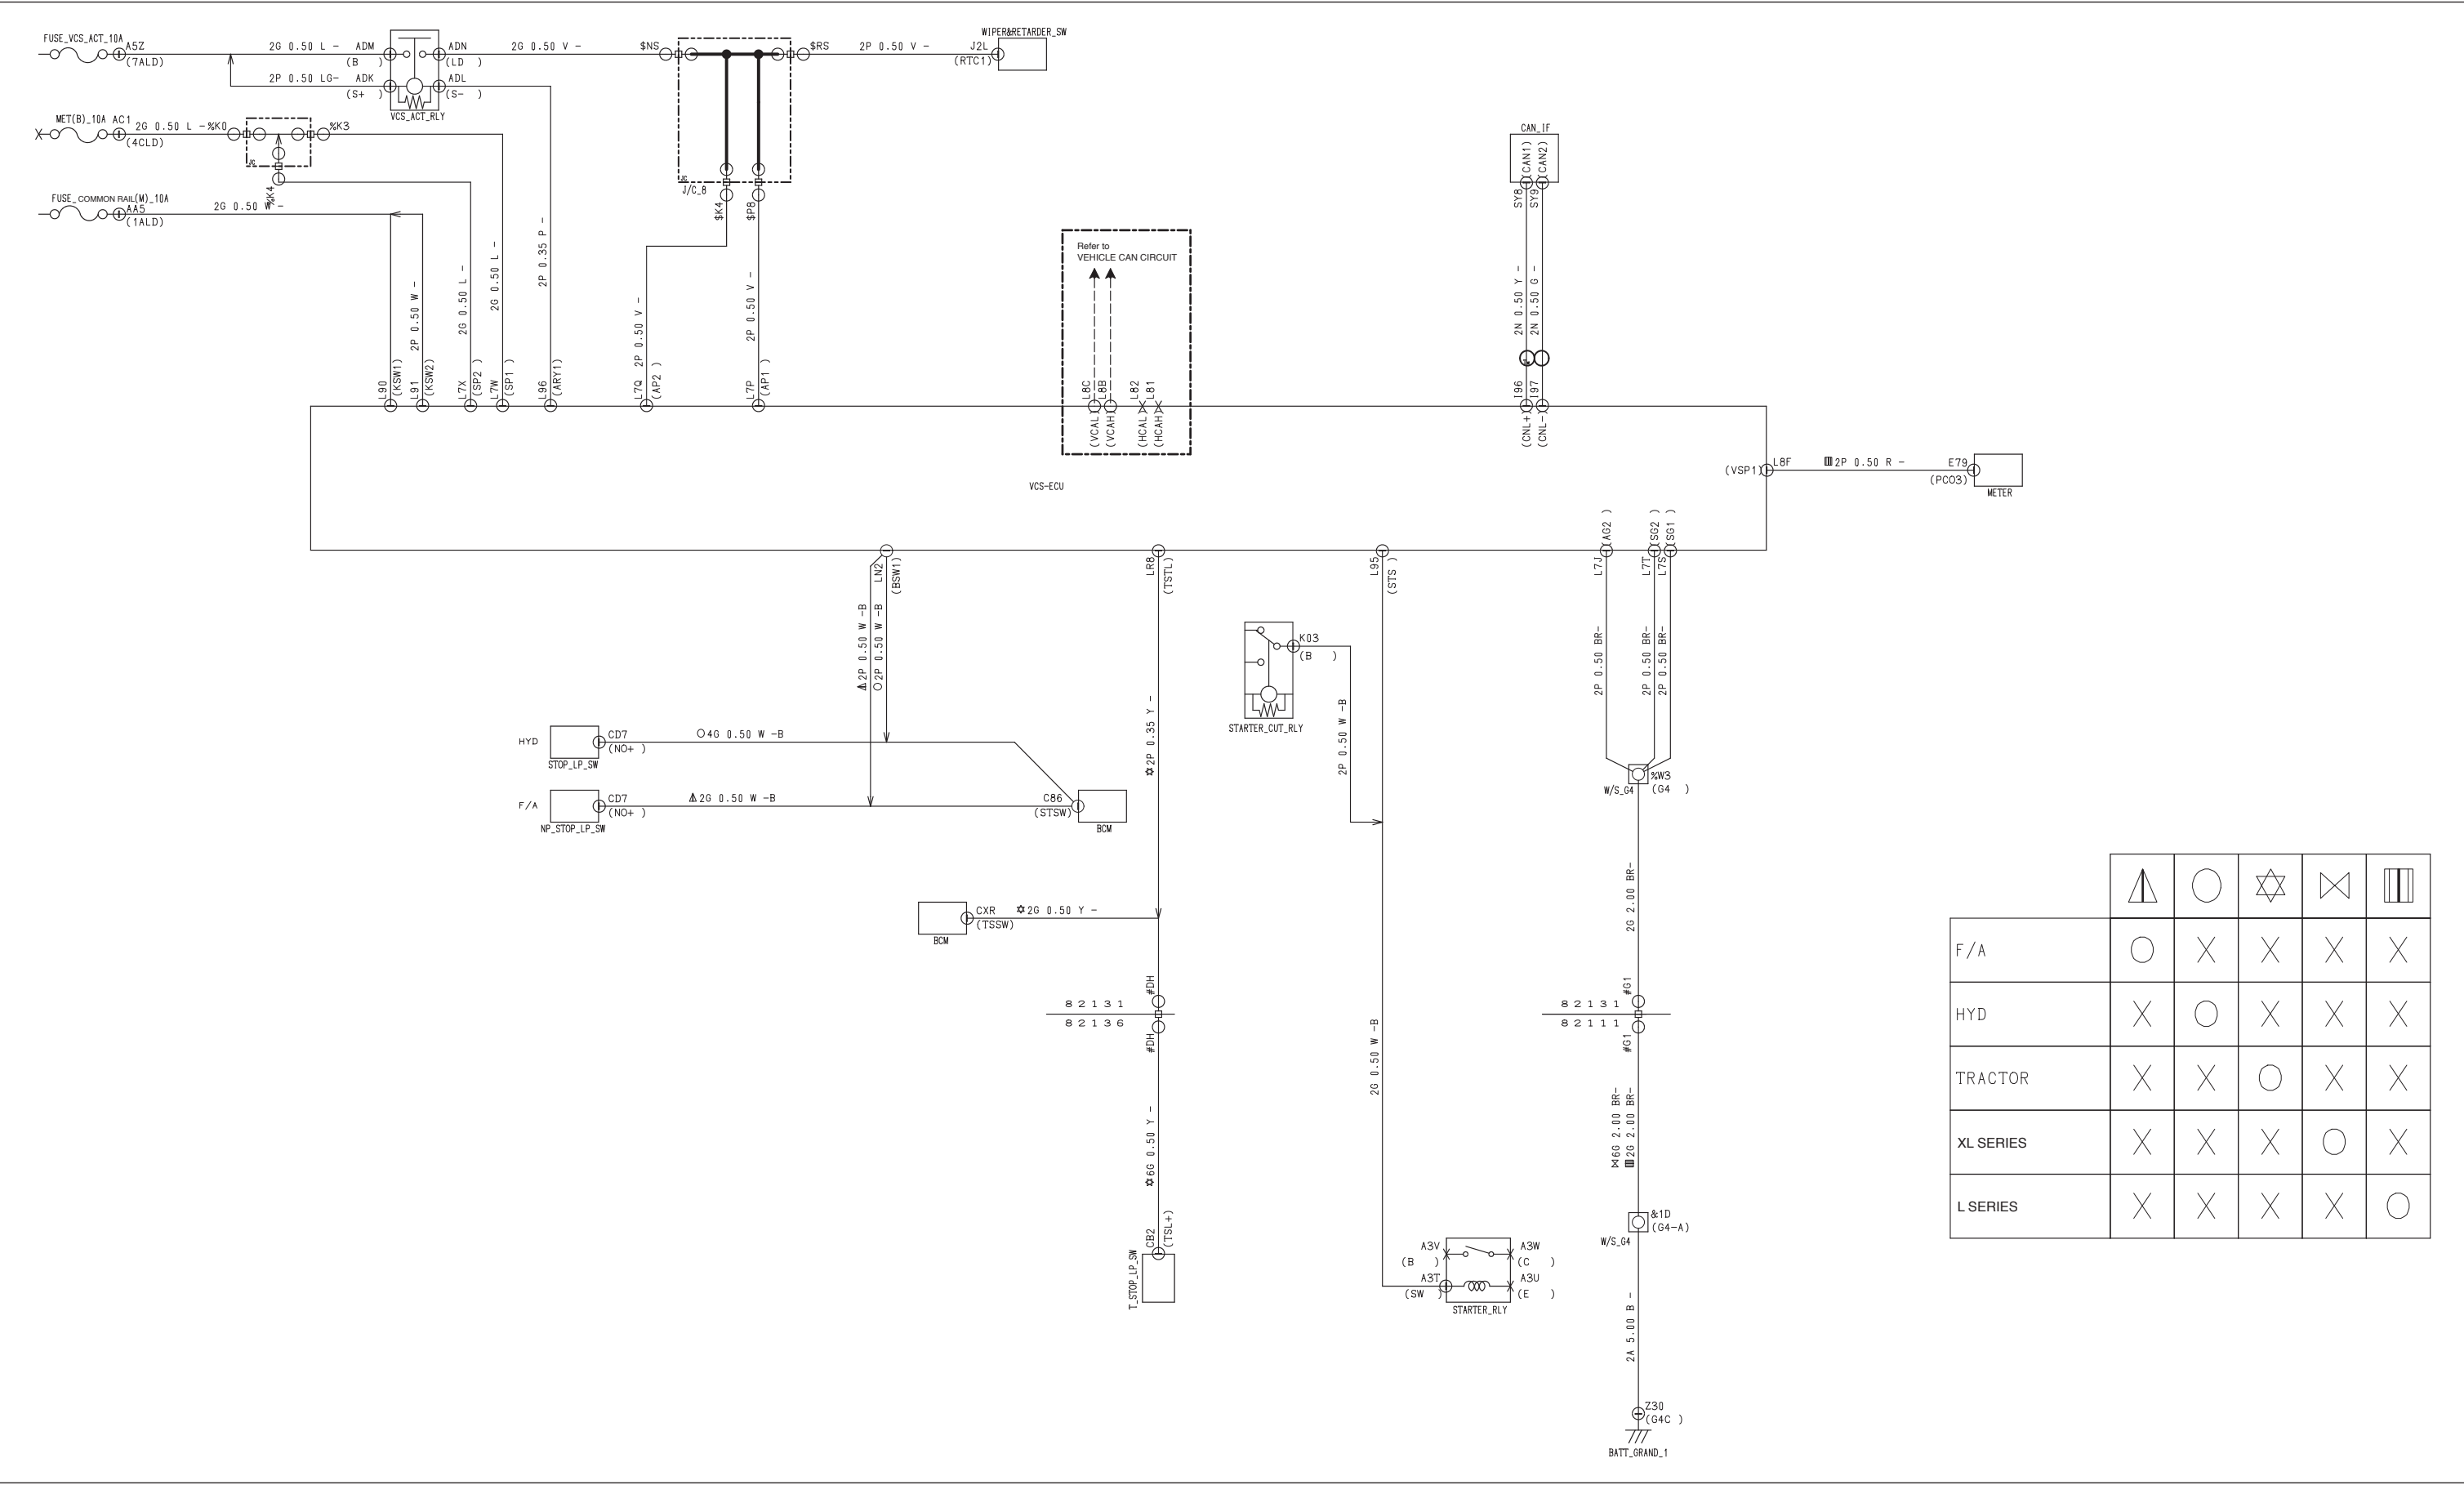


ATM 2200		X	X	X
ATM 3000	X		X	X
L SERIES_ENGINE	X	X		X
XL SERIES_ENGINE	X	X	X	

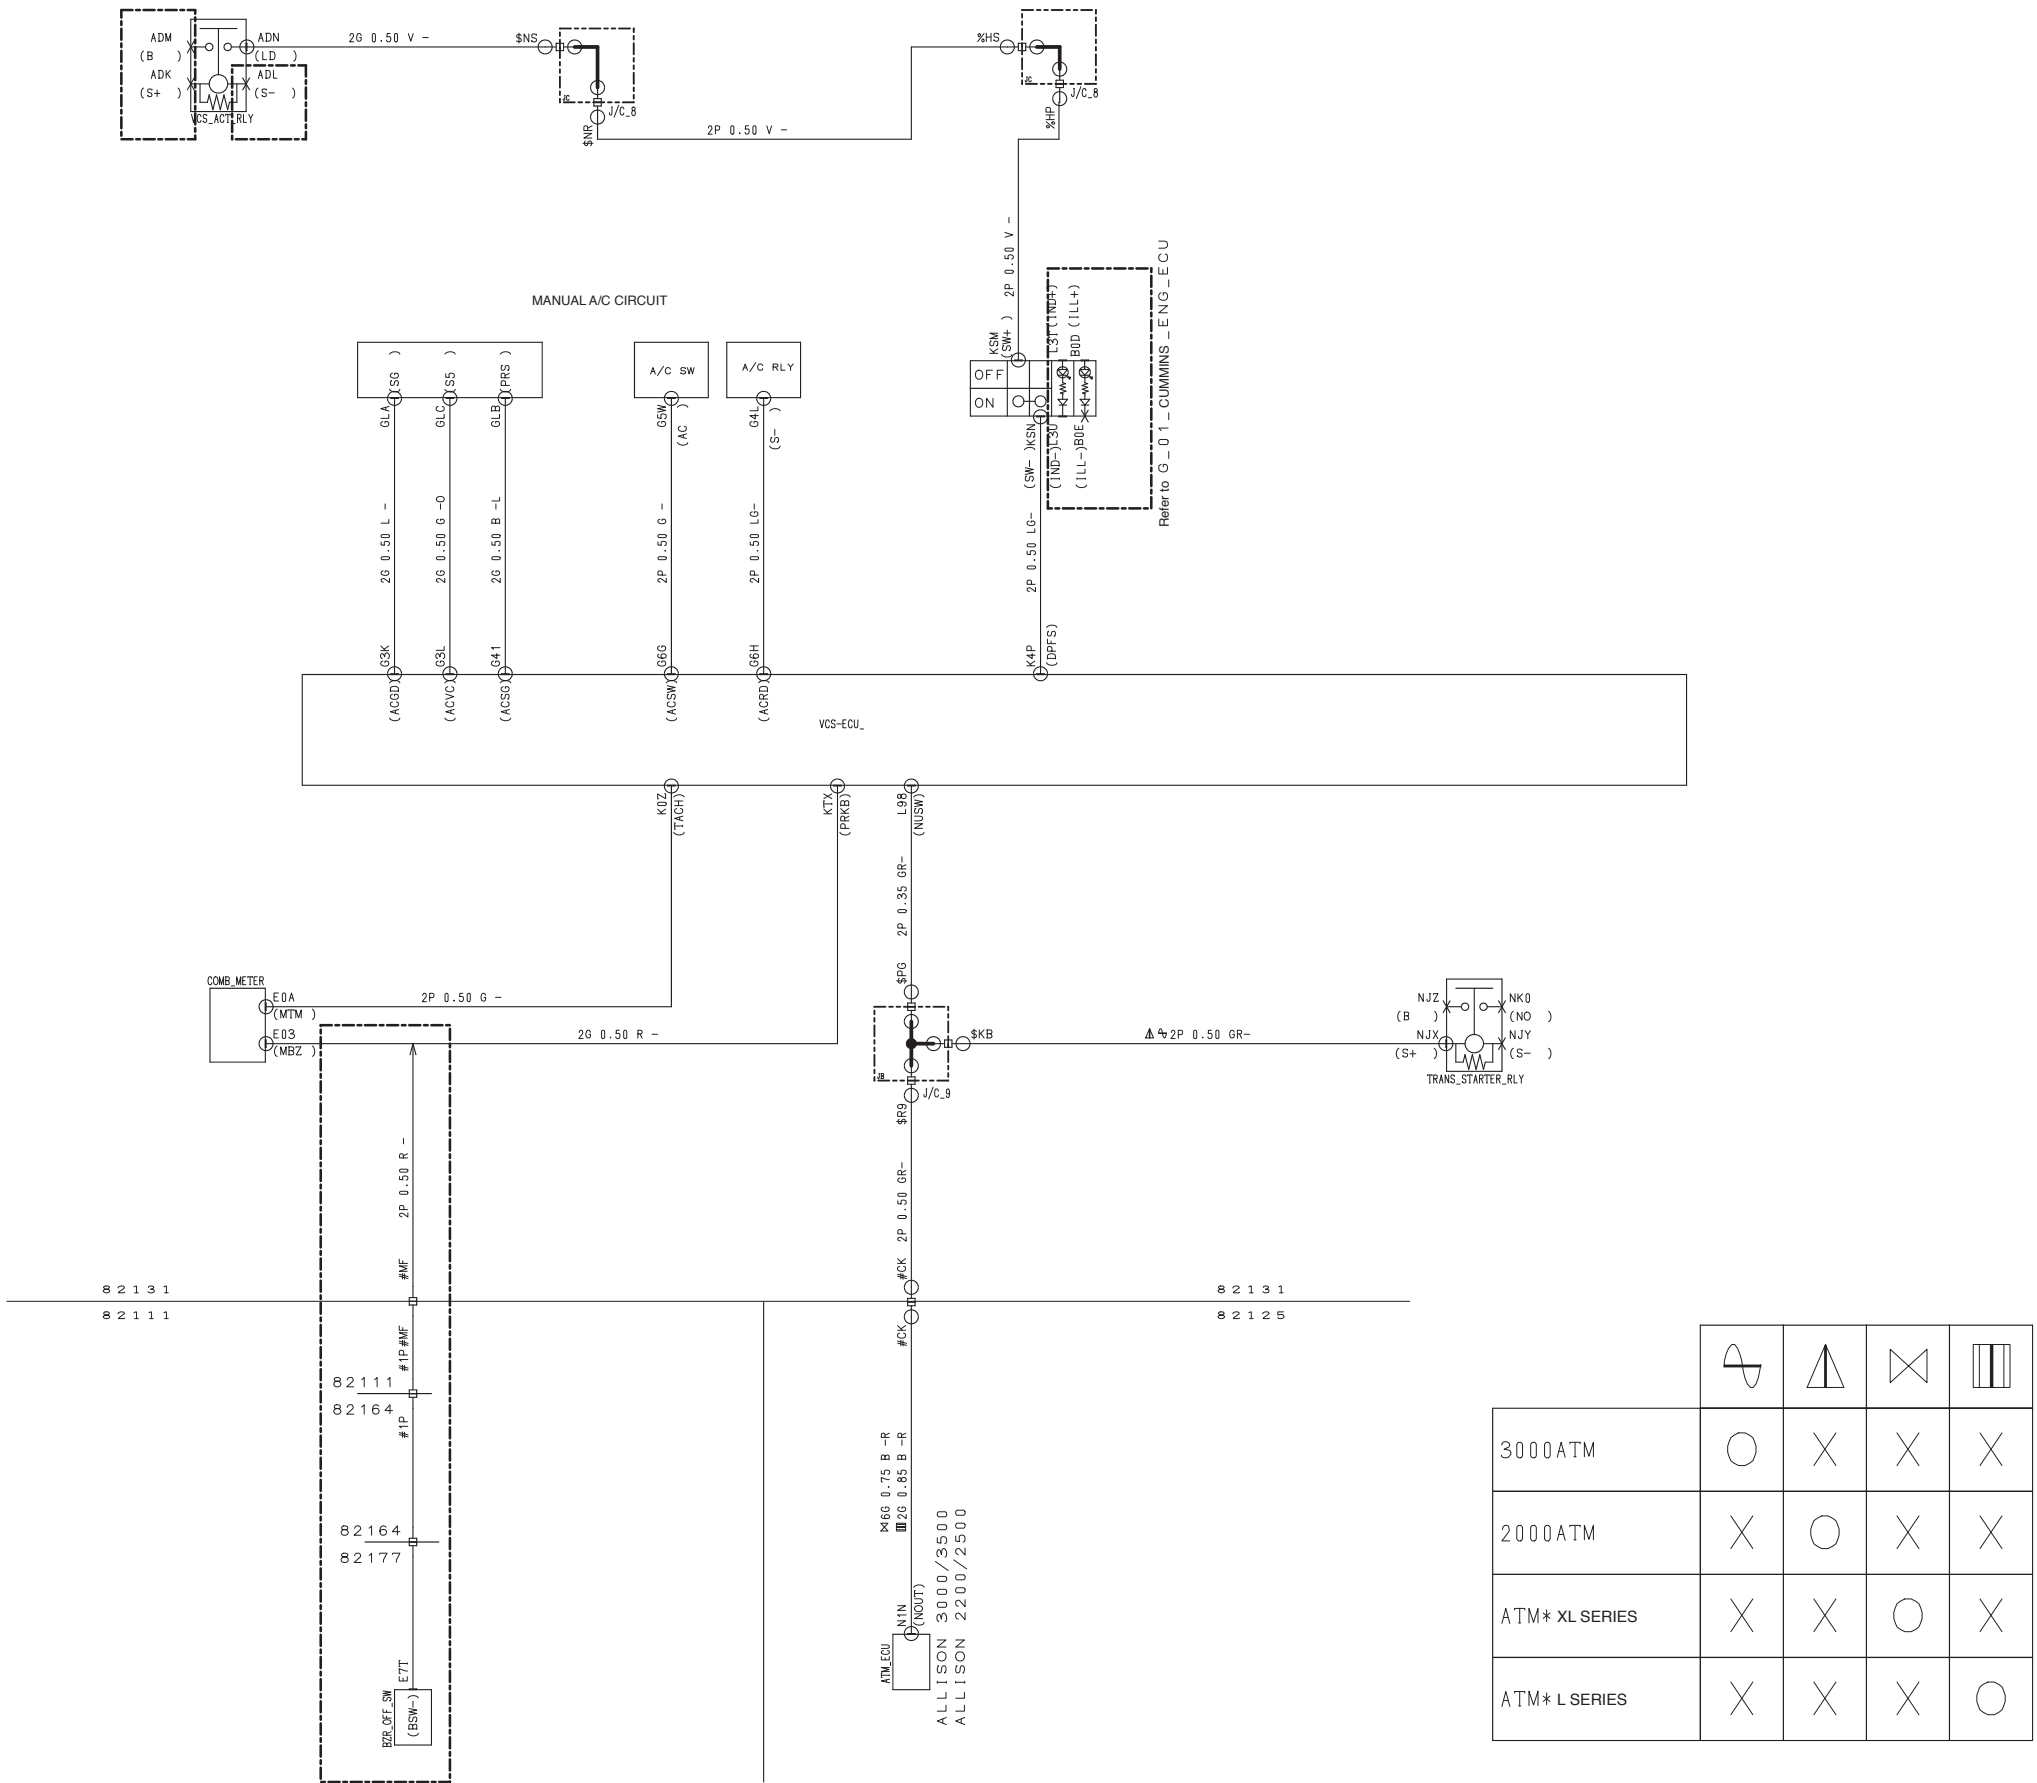
[illegible]

					
F / A _ XL SERIES					
F / A _ L SERIES					
HYD					
F / A _ TRUCK					
F / A _ TRAILER					

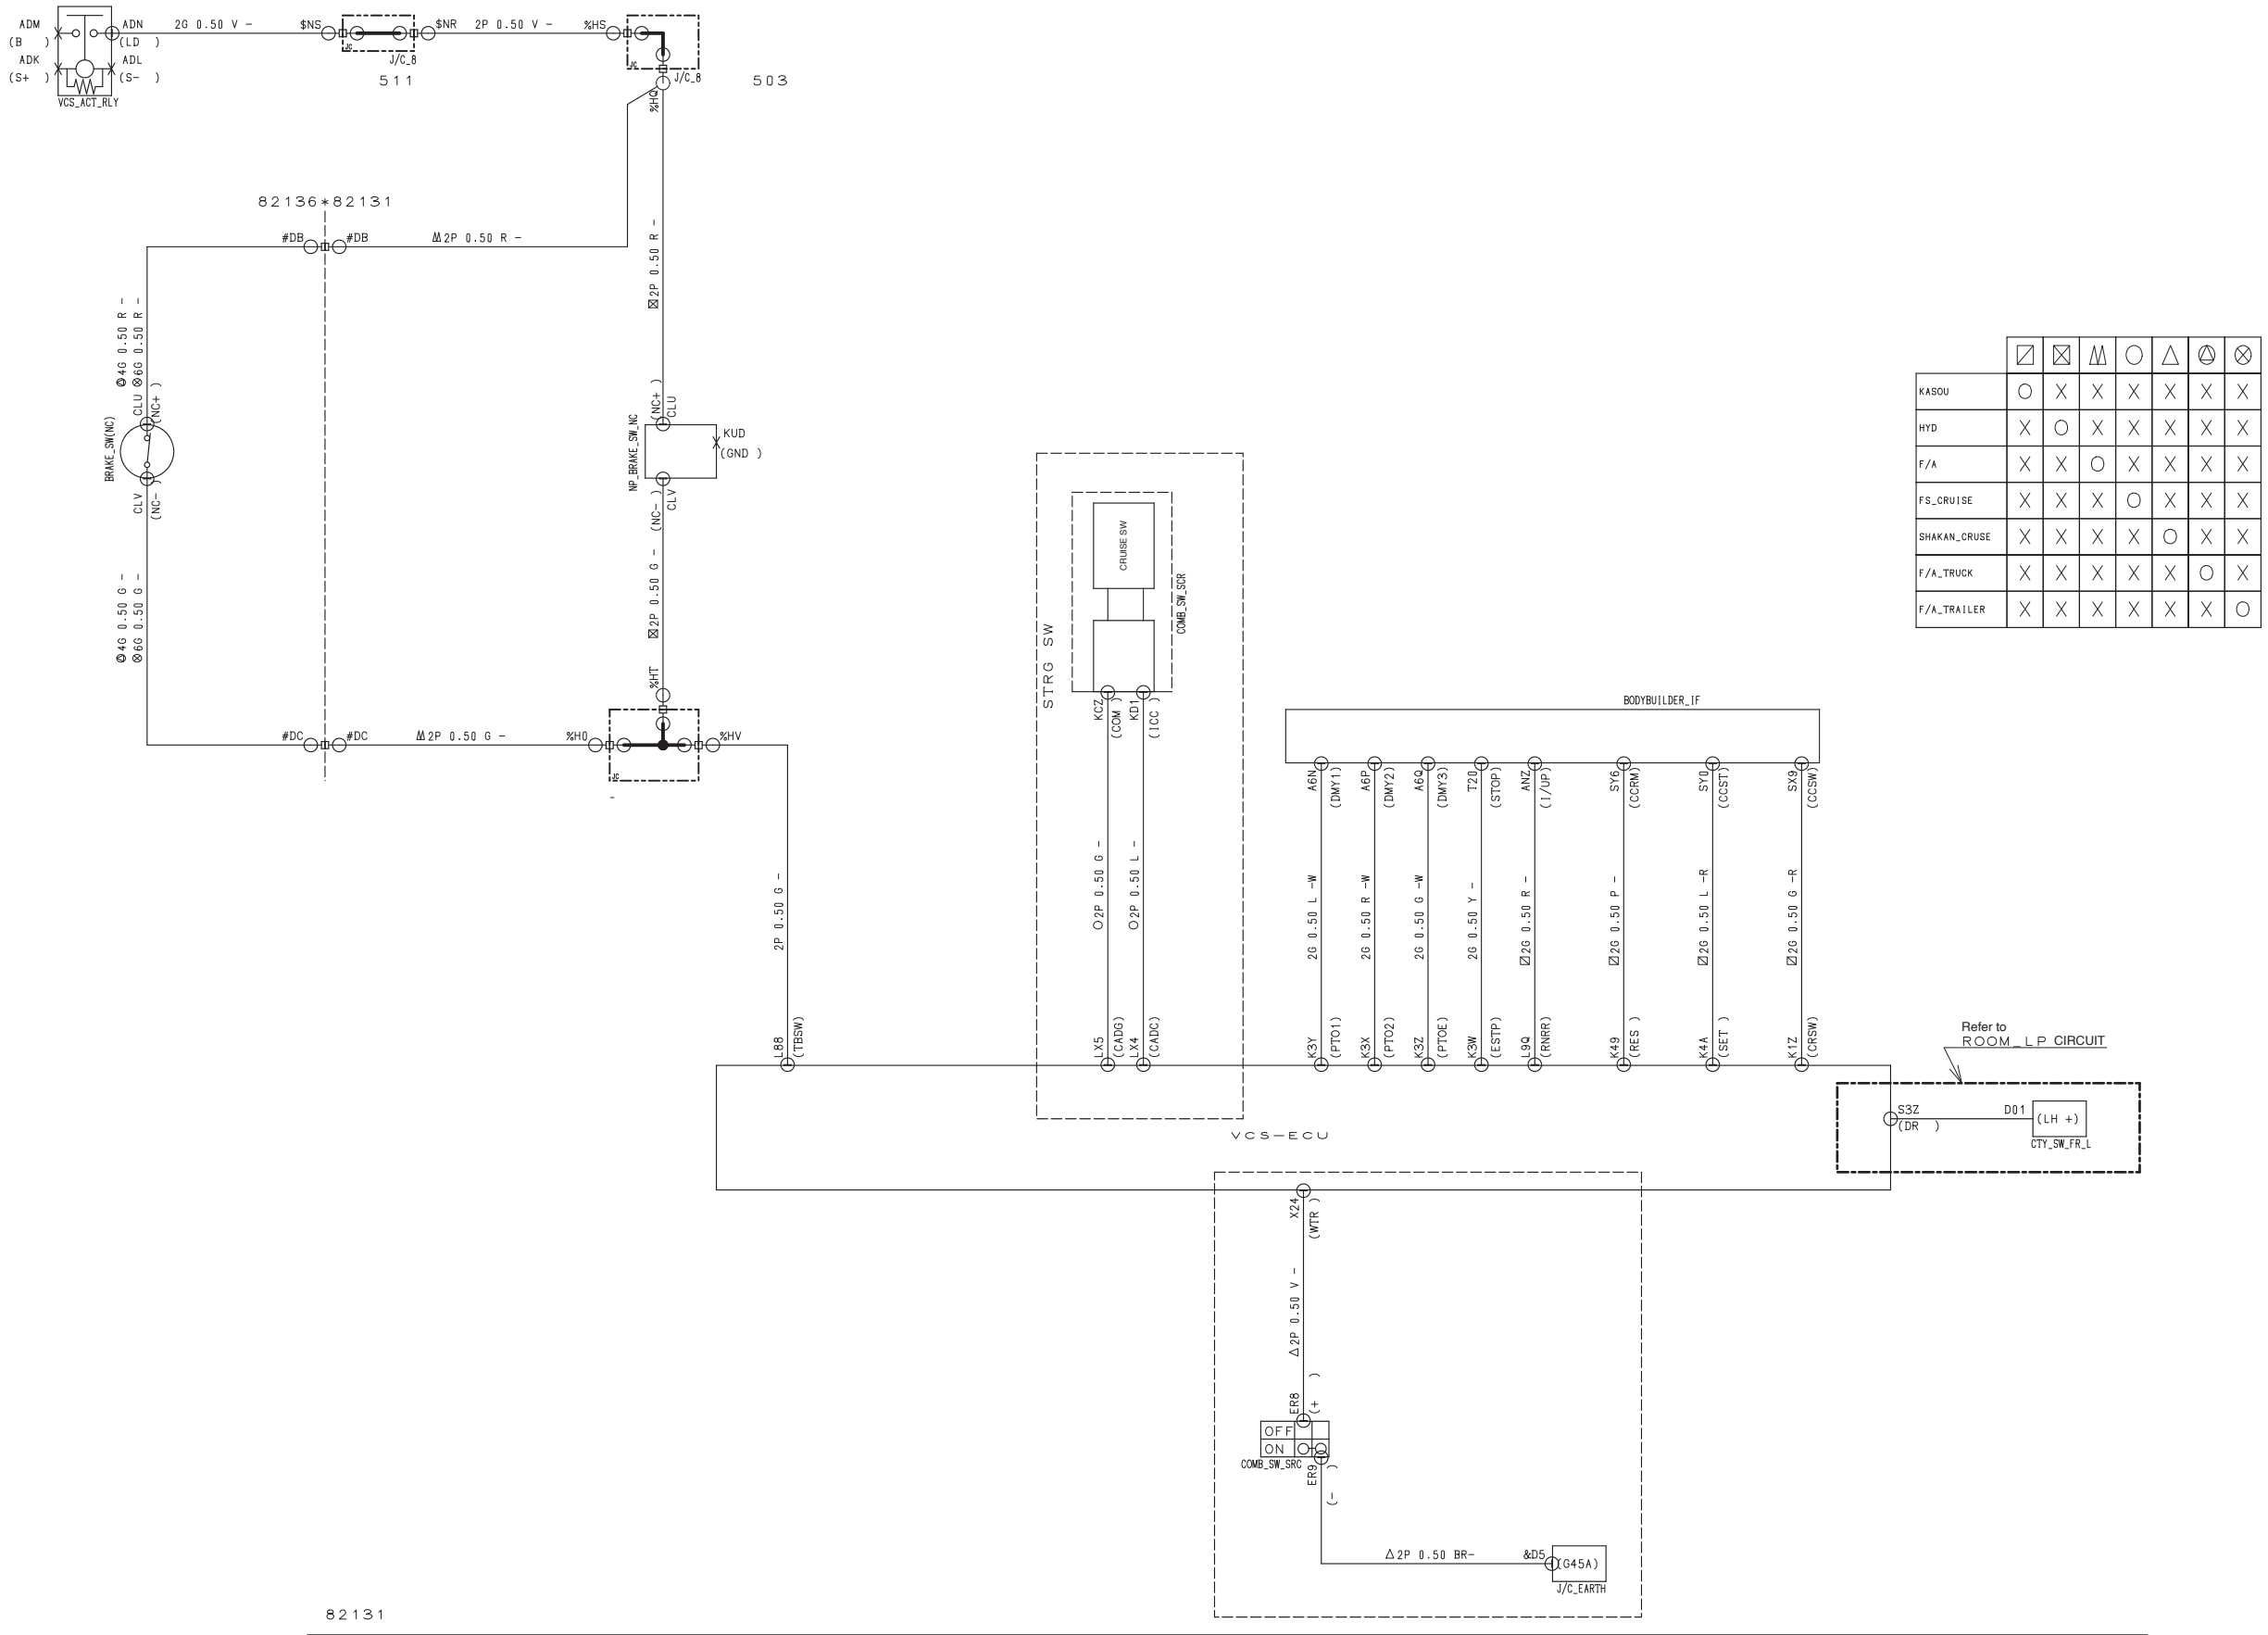
33. VEHICLE CONTROL ECU CIRCUIT\_1



34. VEHICLE CONTROL ECU CIRCUIT\_2

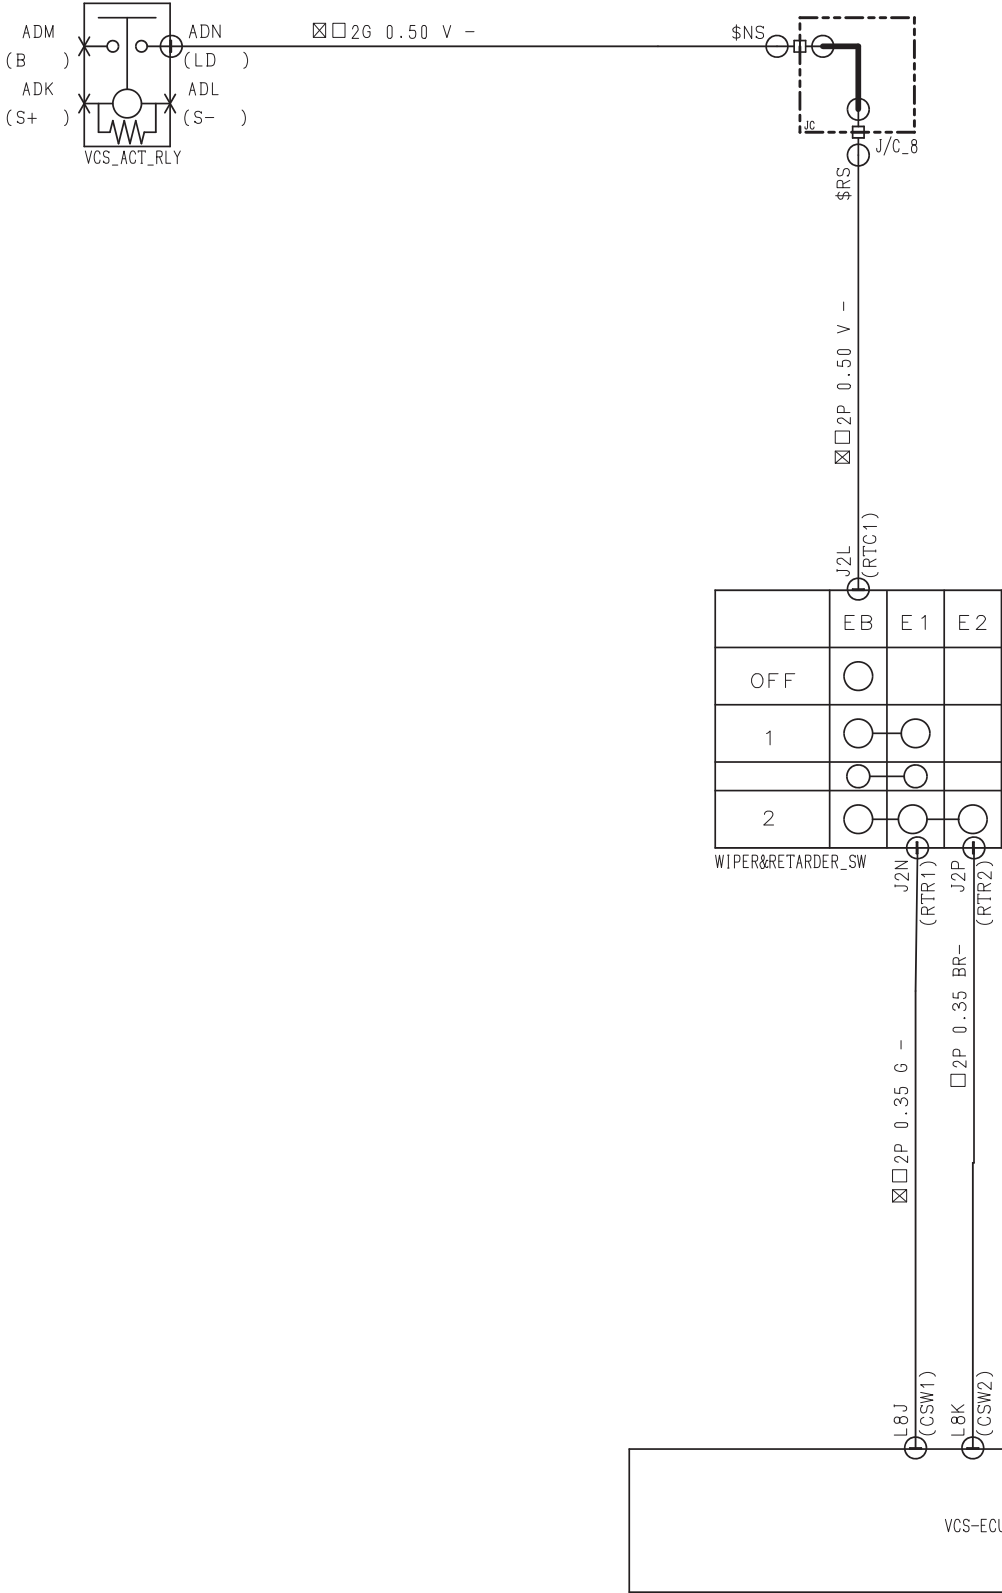


35. VEHICLE CONTROL ECU CIRCUIT\_3



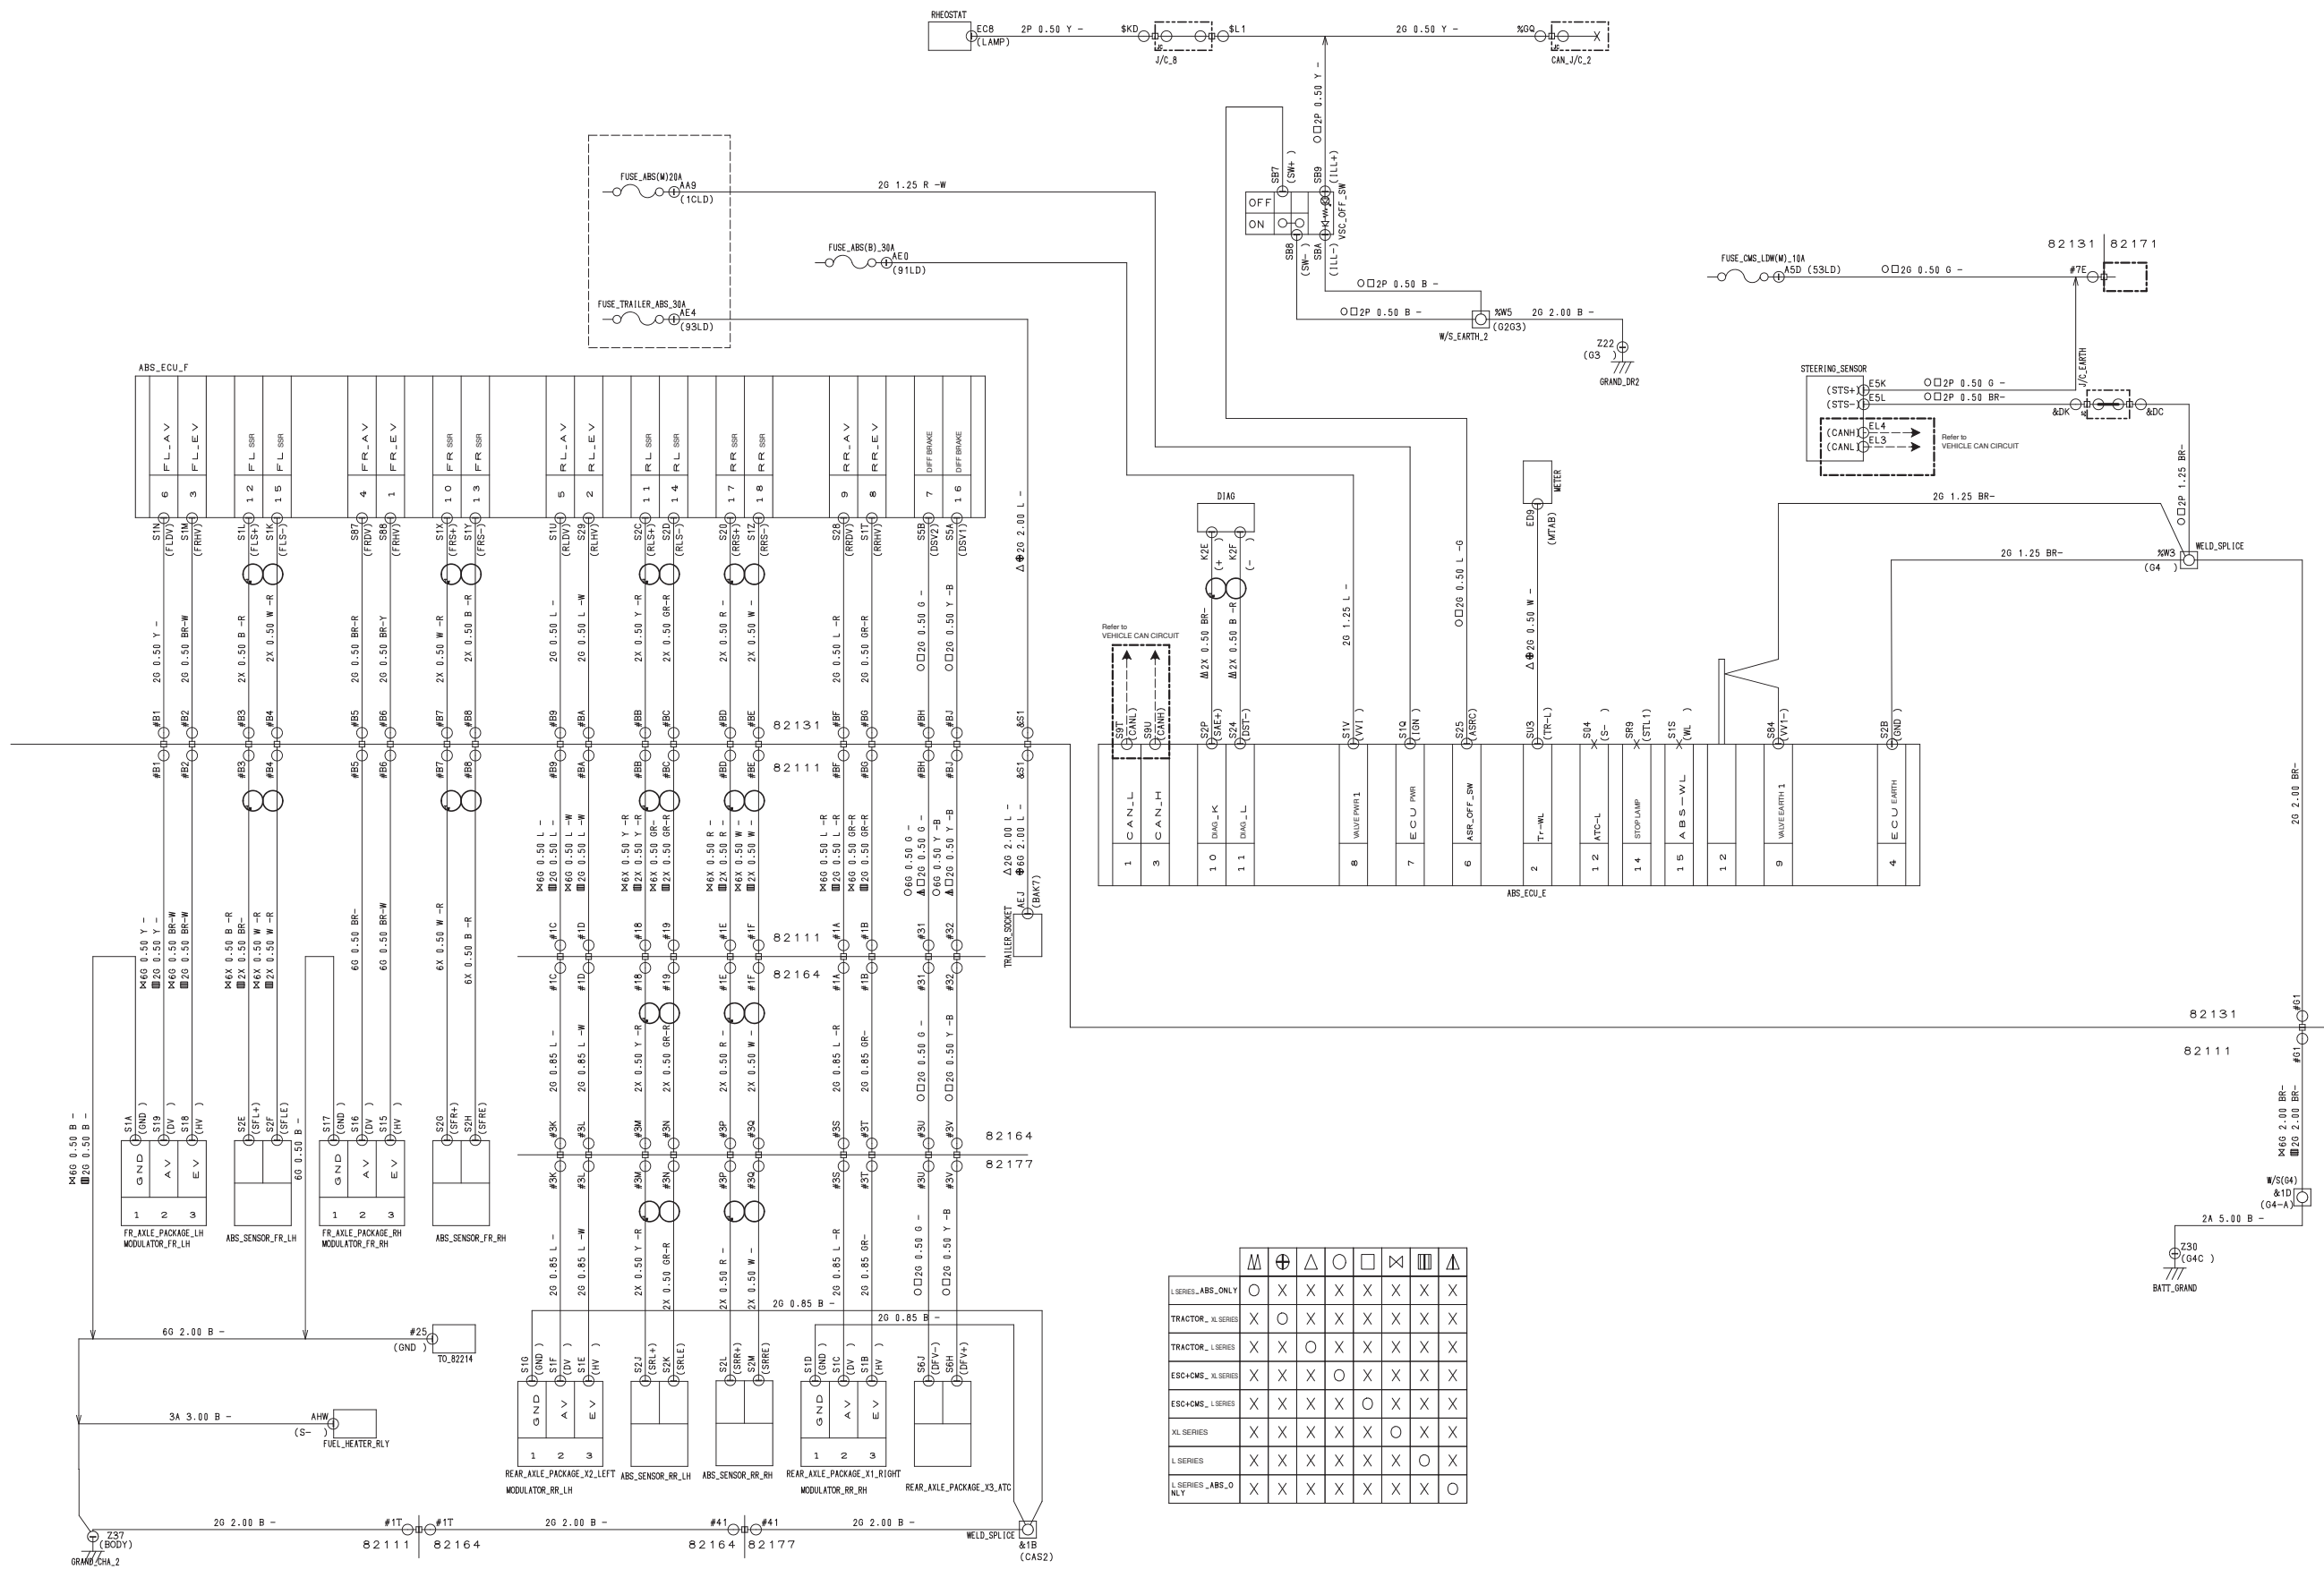
36. VEHICLE CONTROL ECU CIRCUIT\_4 (EXHAUST BRAKE)

8 2 1 3 1

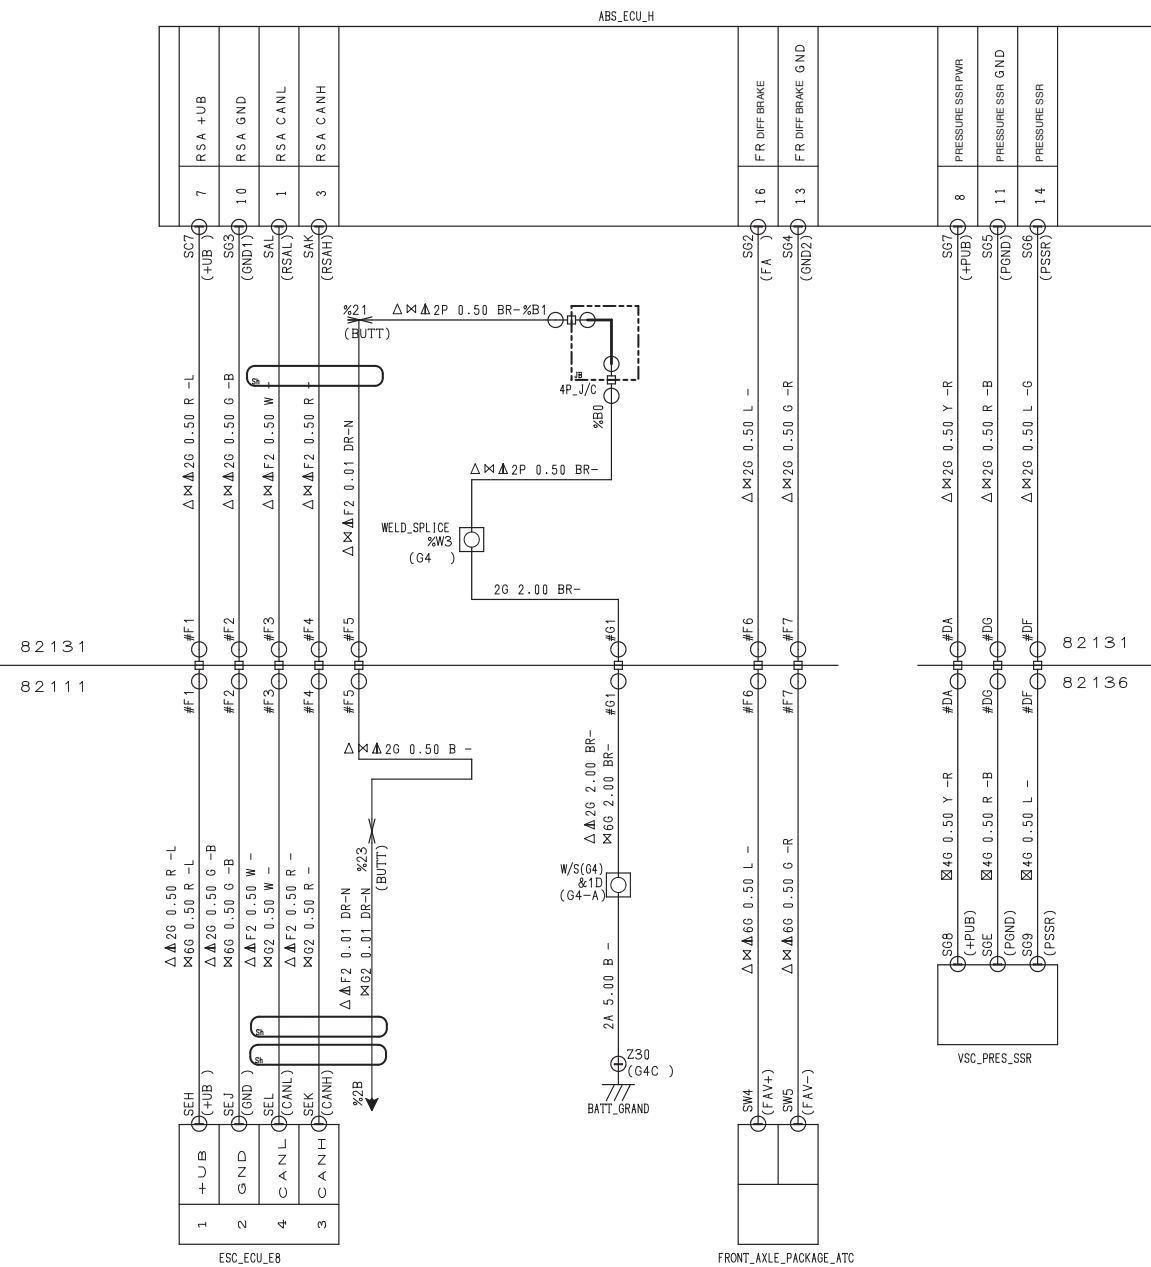












































JAKE2 XL SERIES		X
VGT	X	

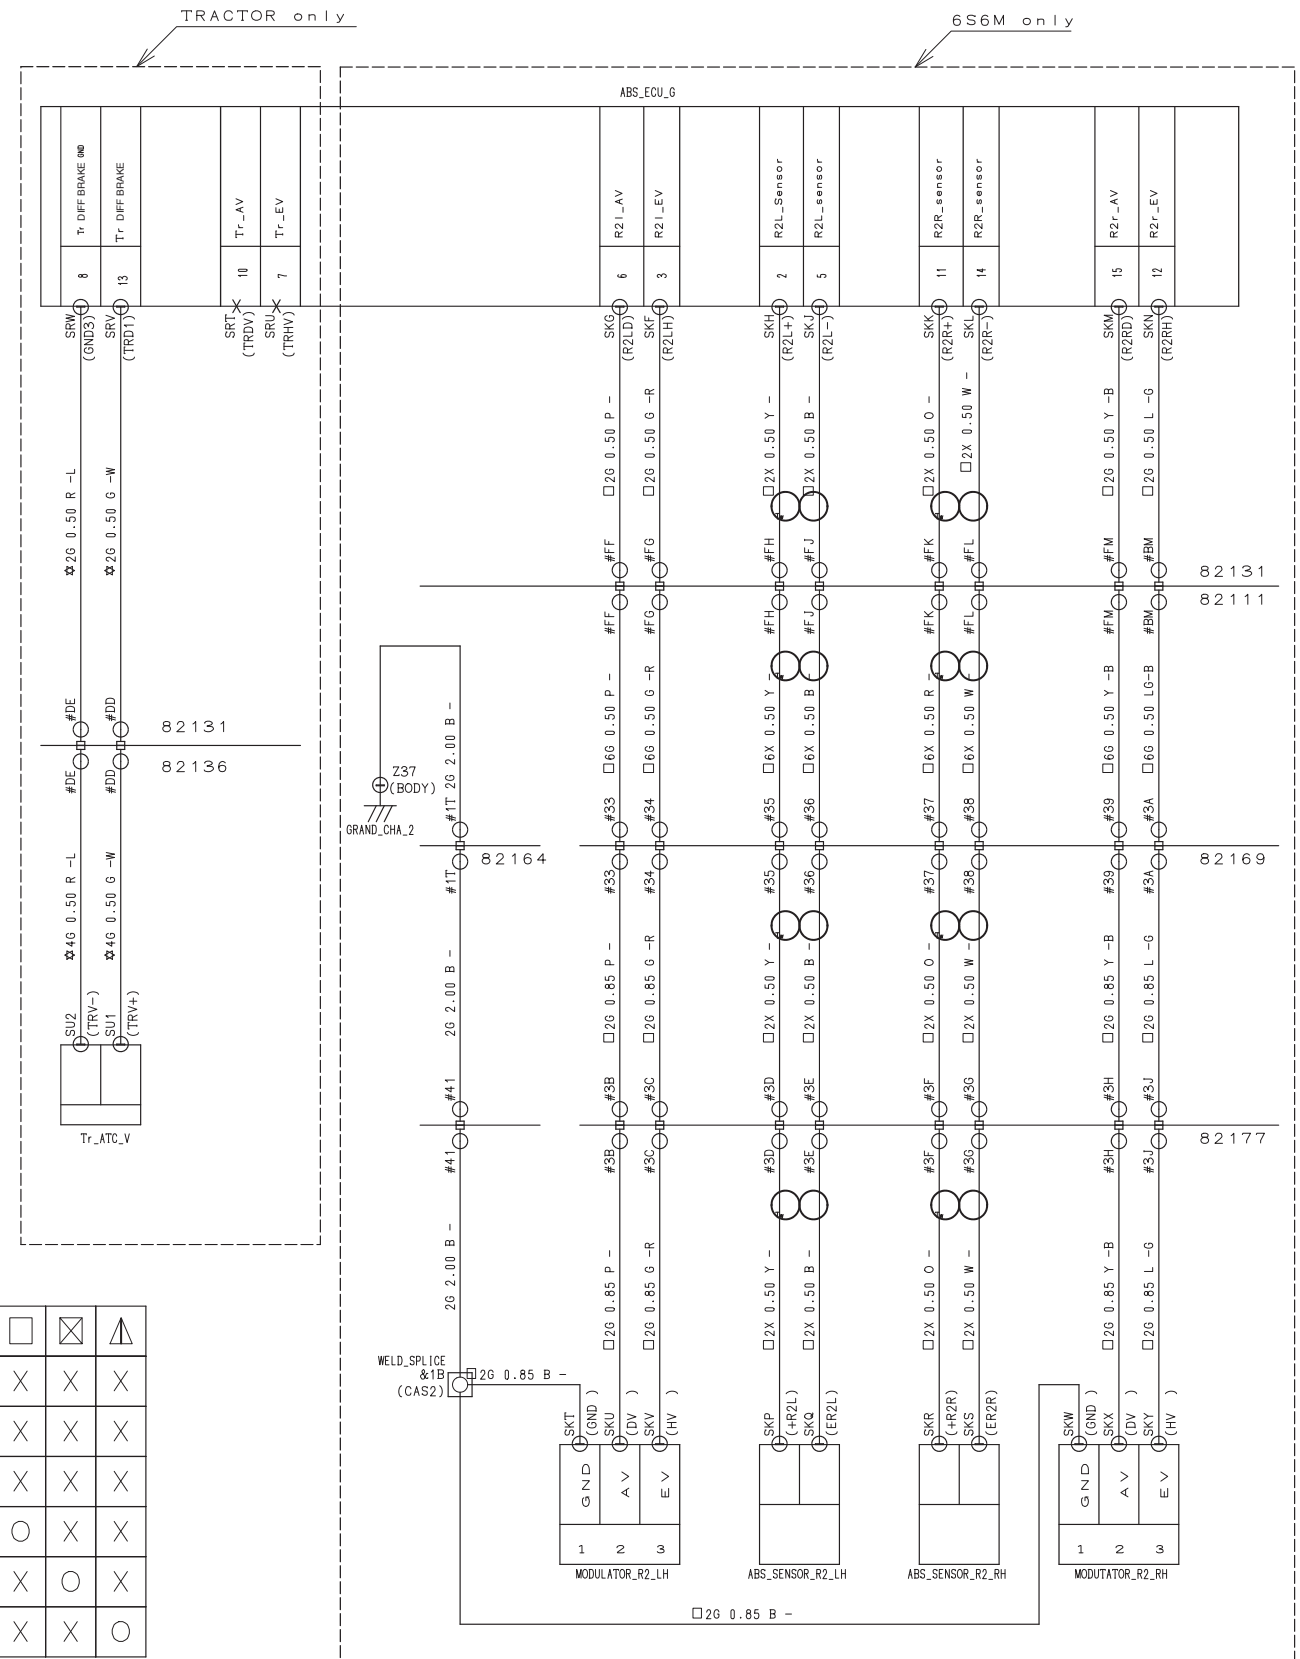
37. ABS CIRCUIT\_1



### 38. ABS\_CIRCUIT\_2

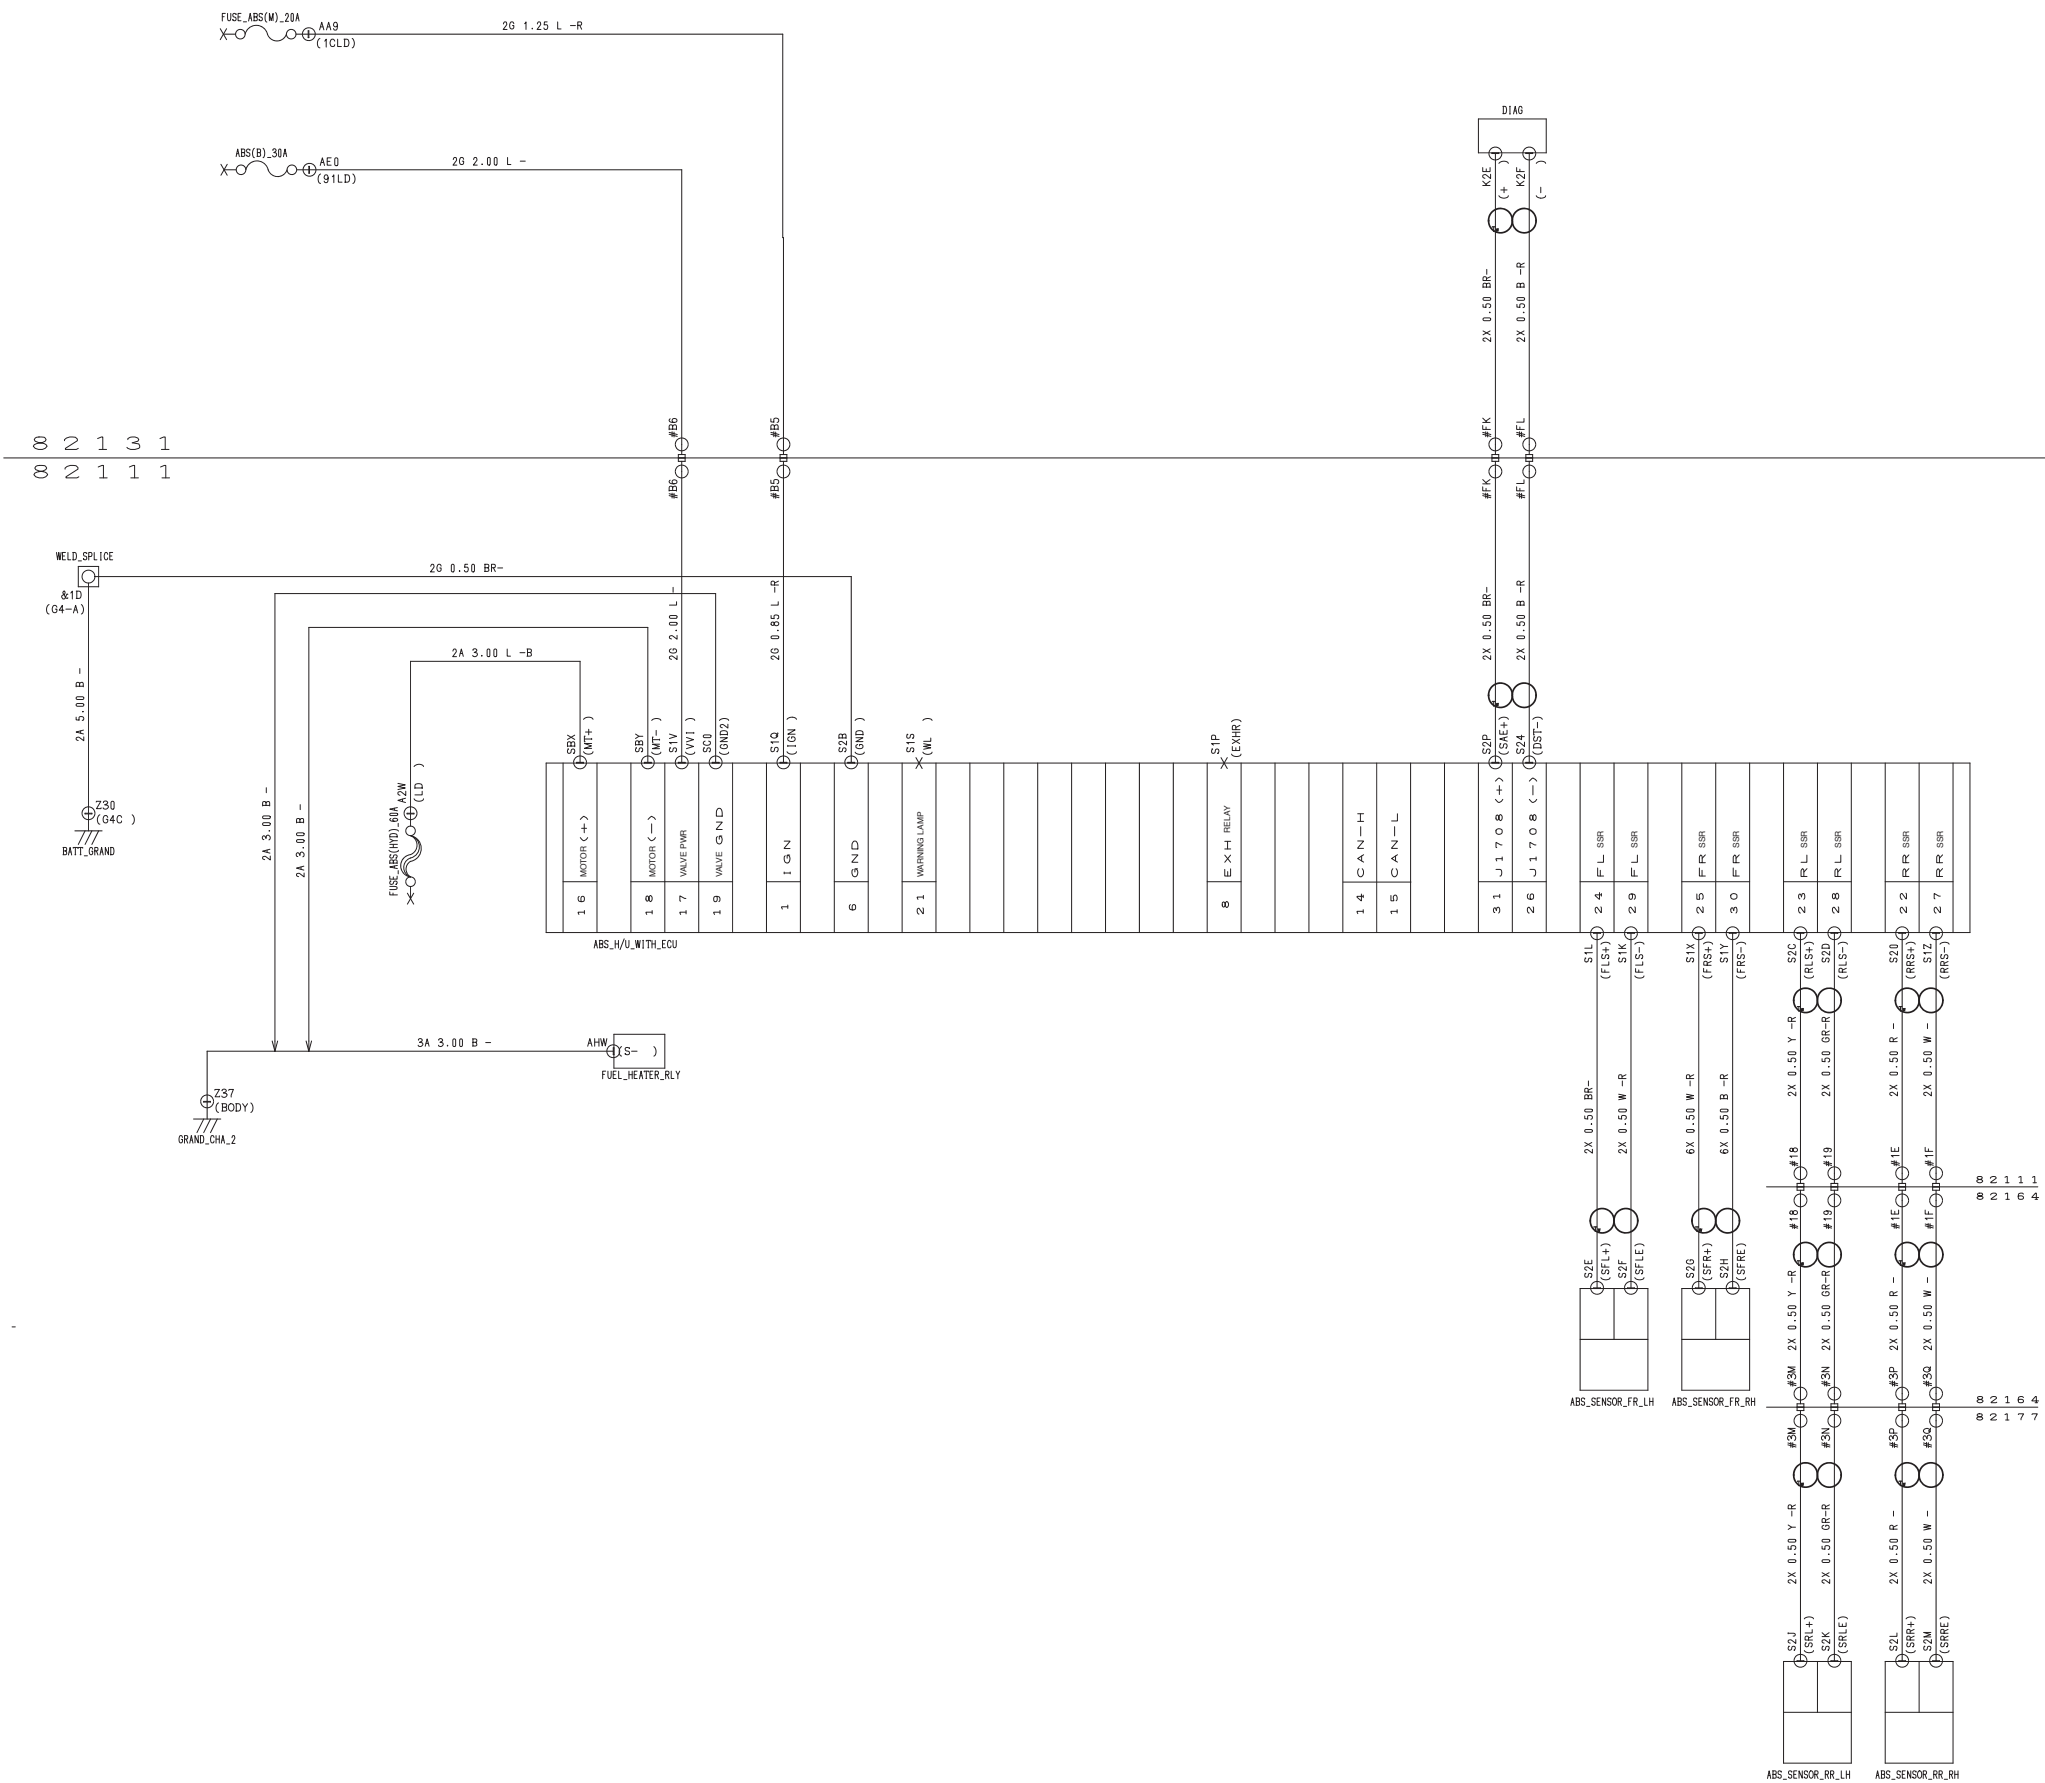


						
TRACTOR						
VSC_CMS_ L.SERIES						
VSC_CMS_ XL.SERIES						
6S6M						
VSC_CMS						
L.SERIES_ABS_ONLY						

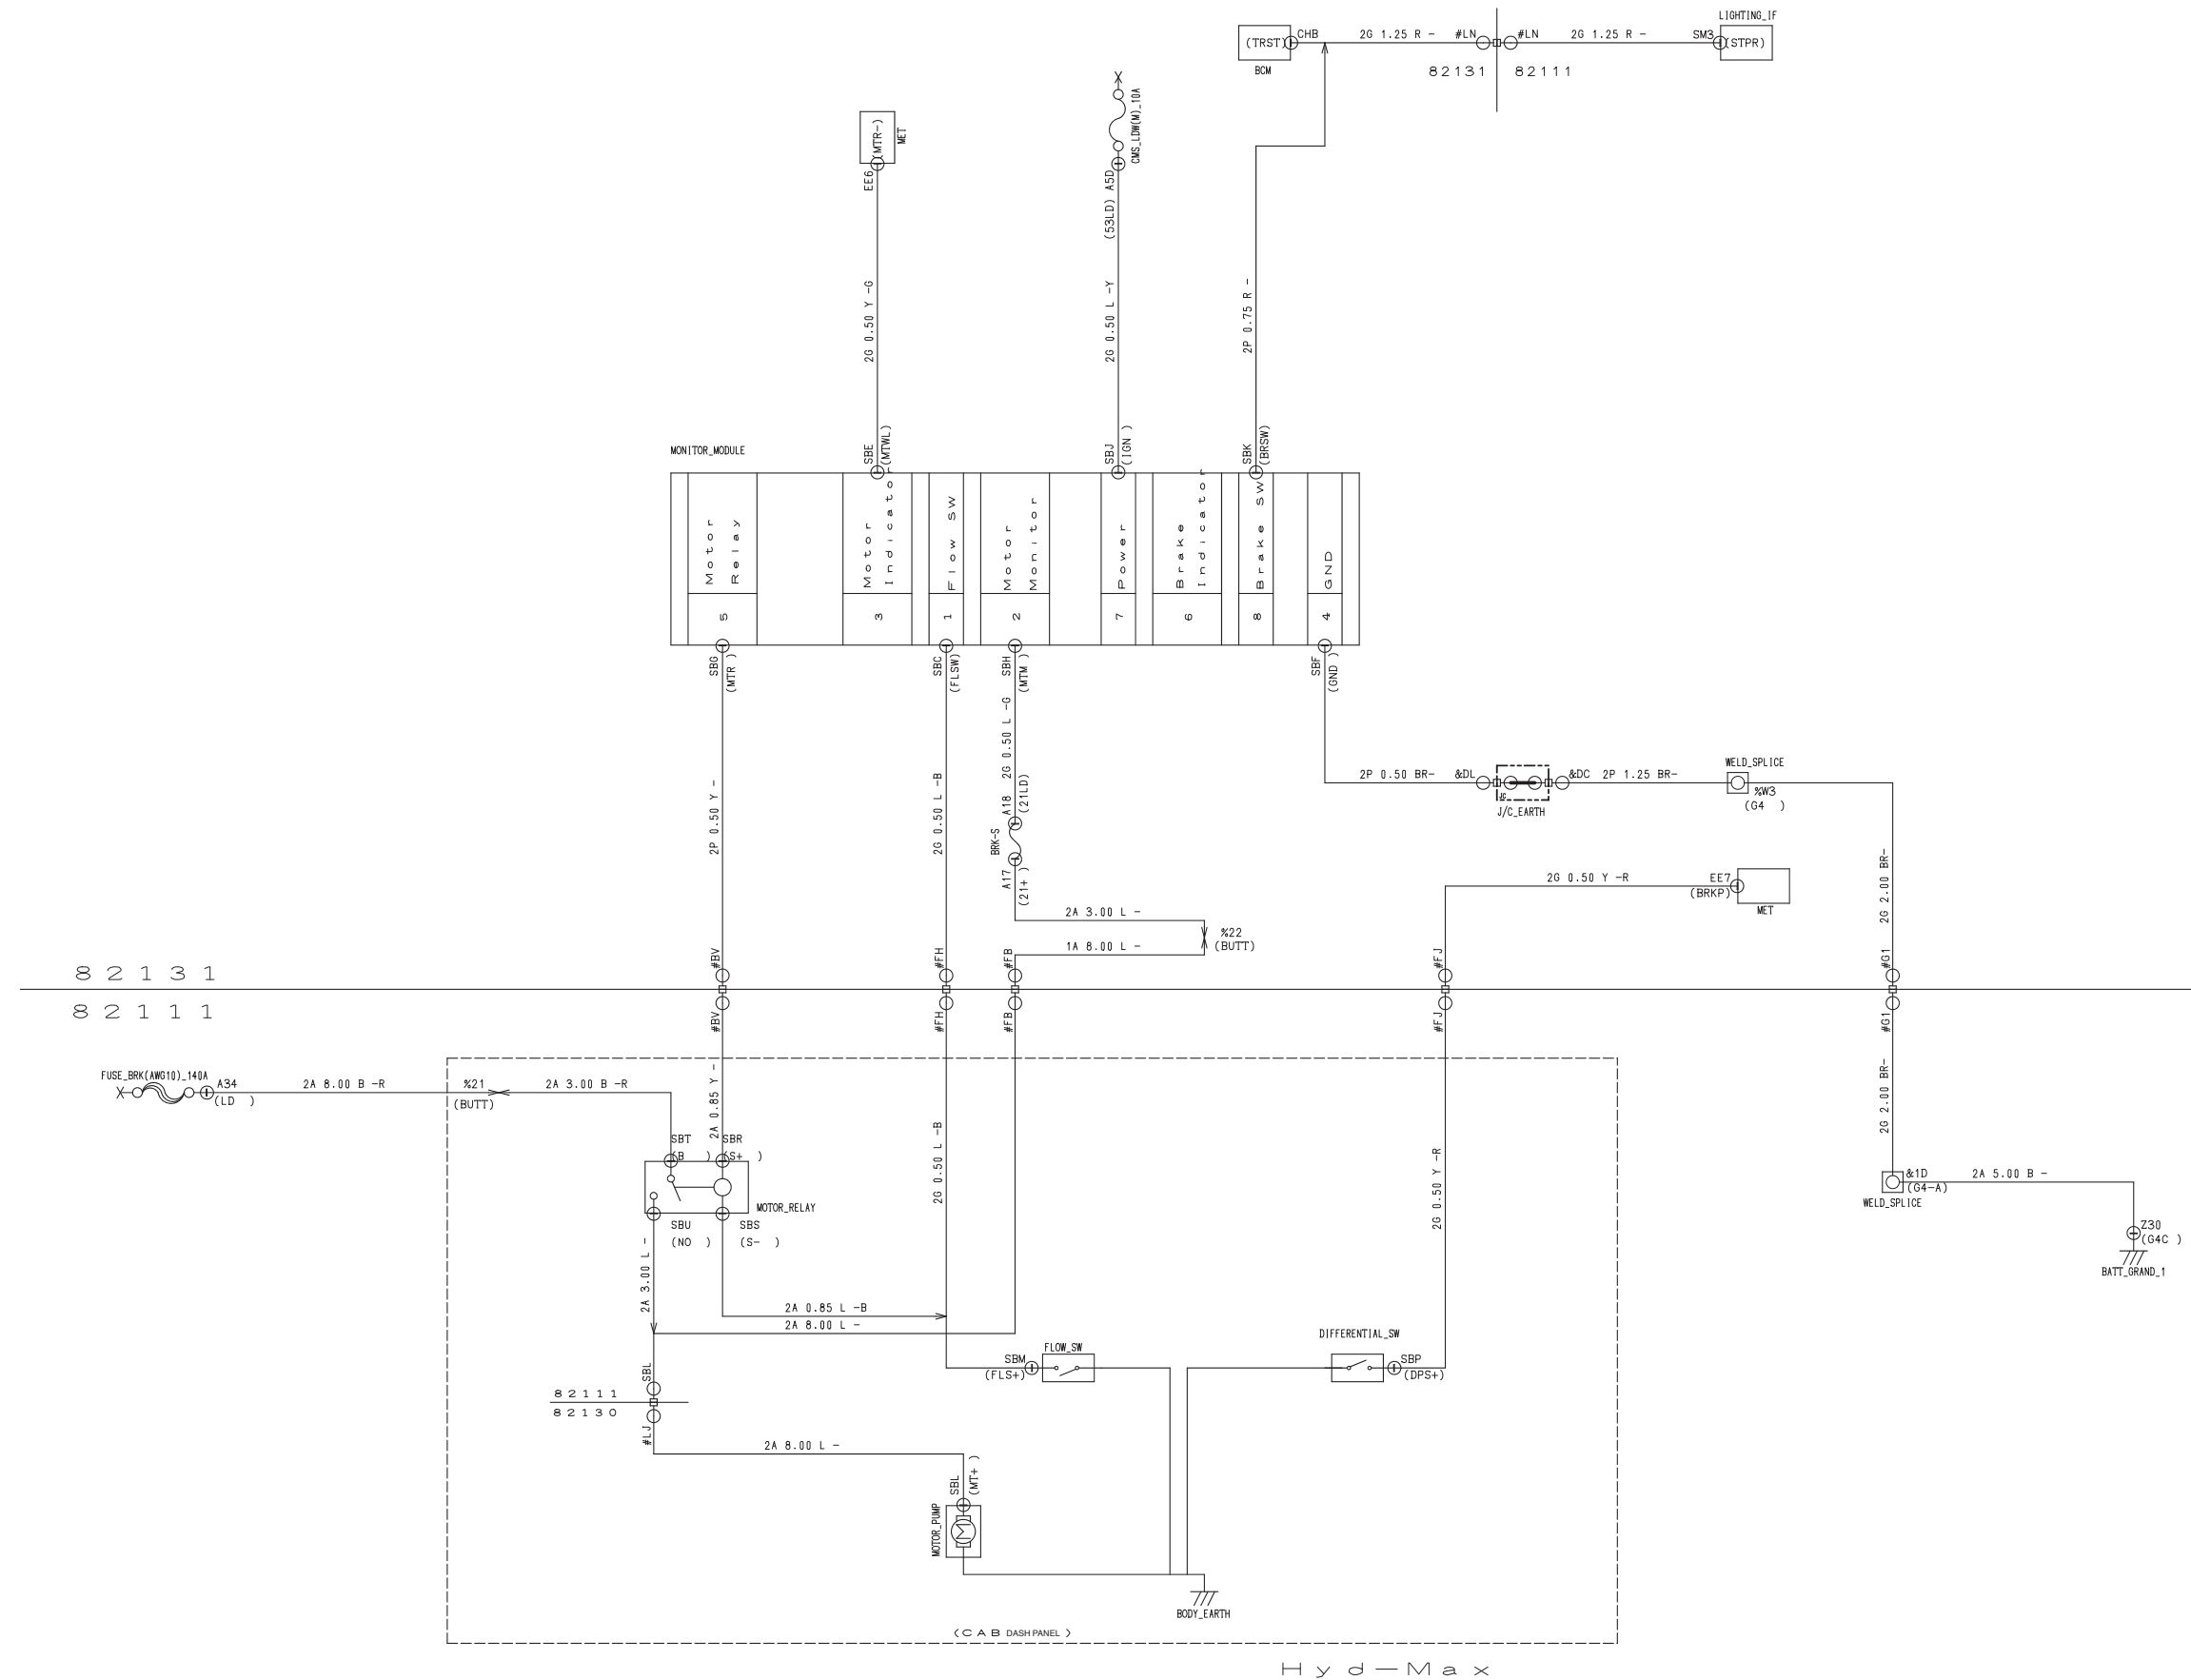




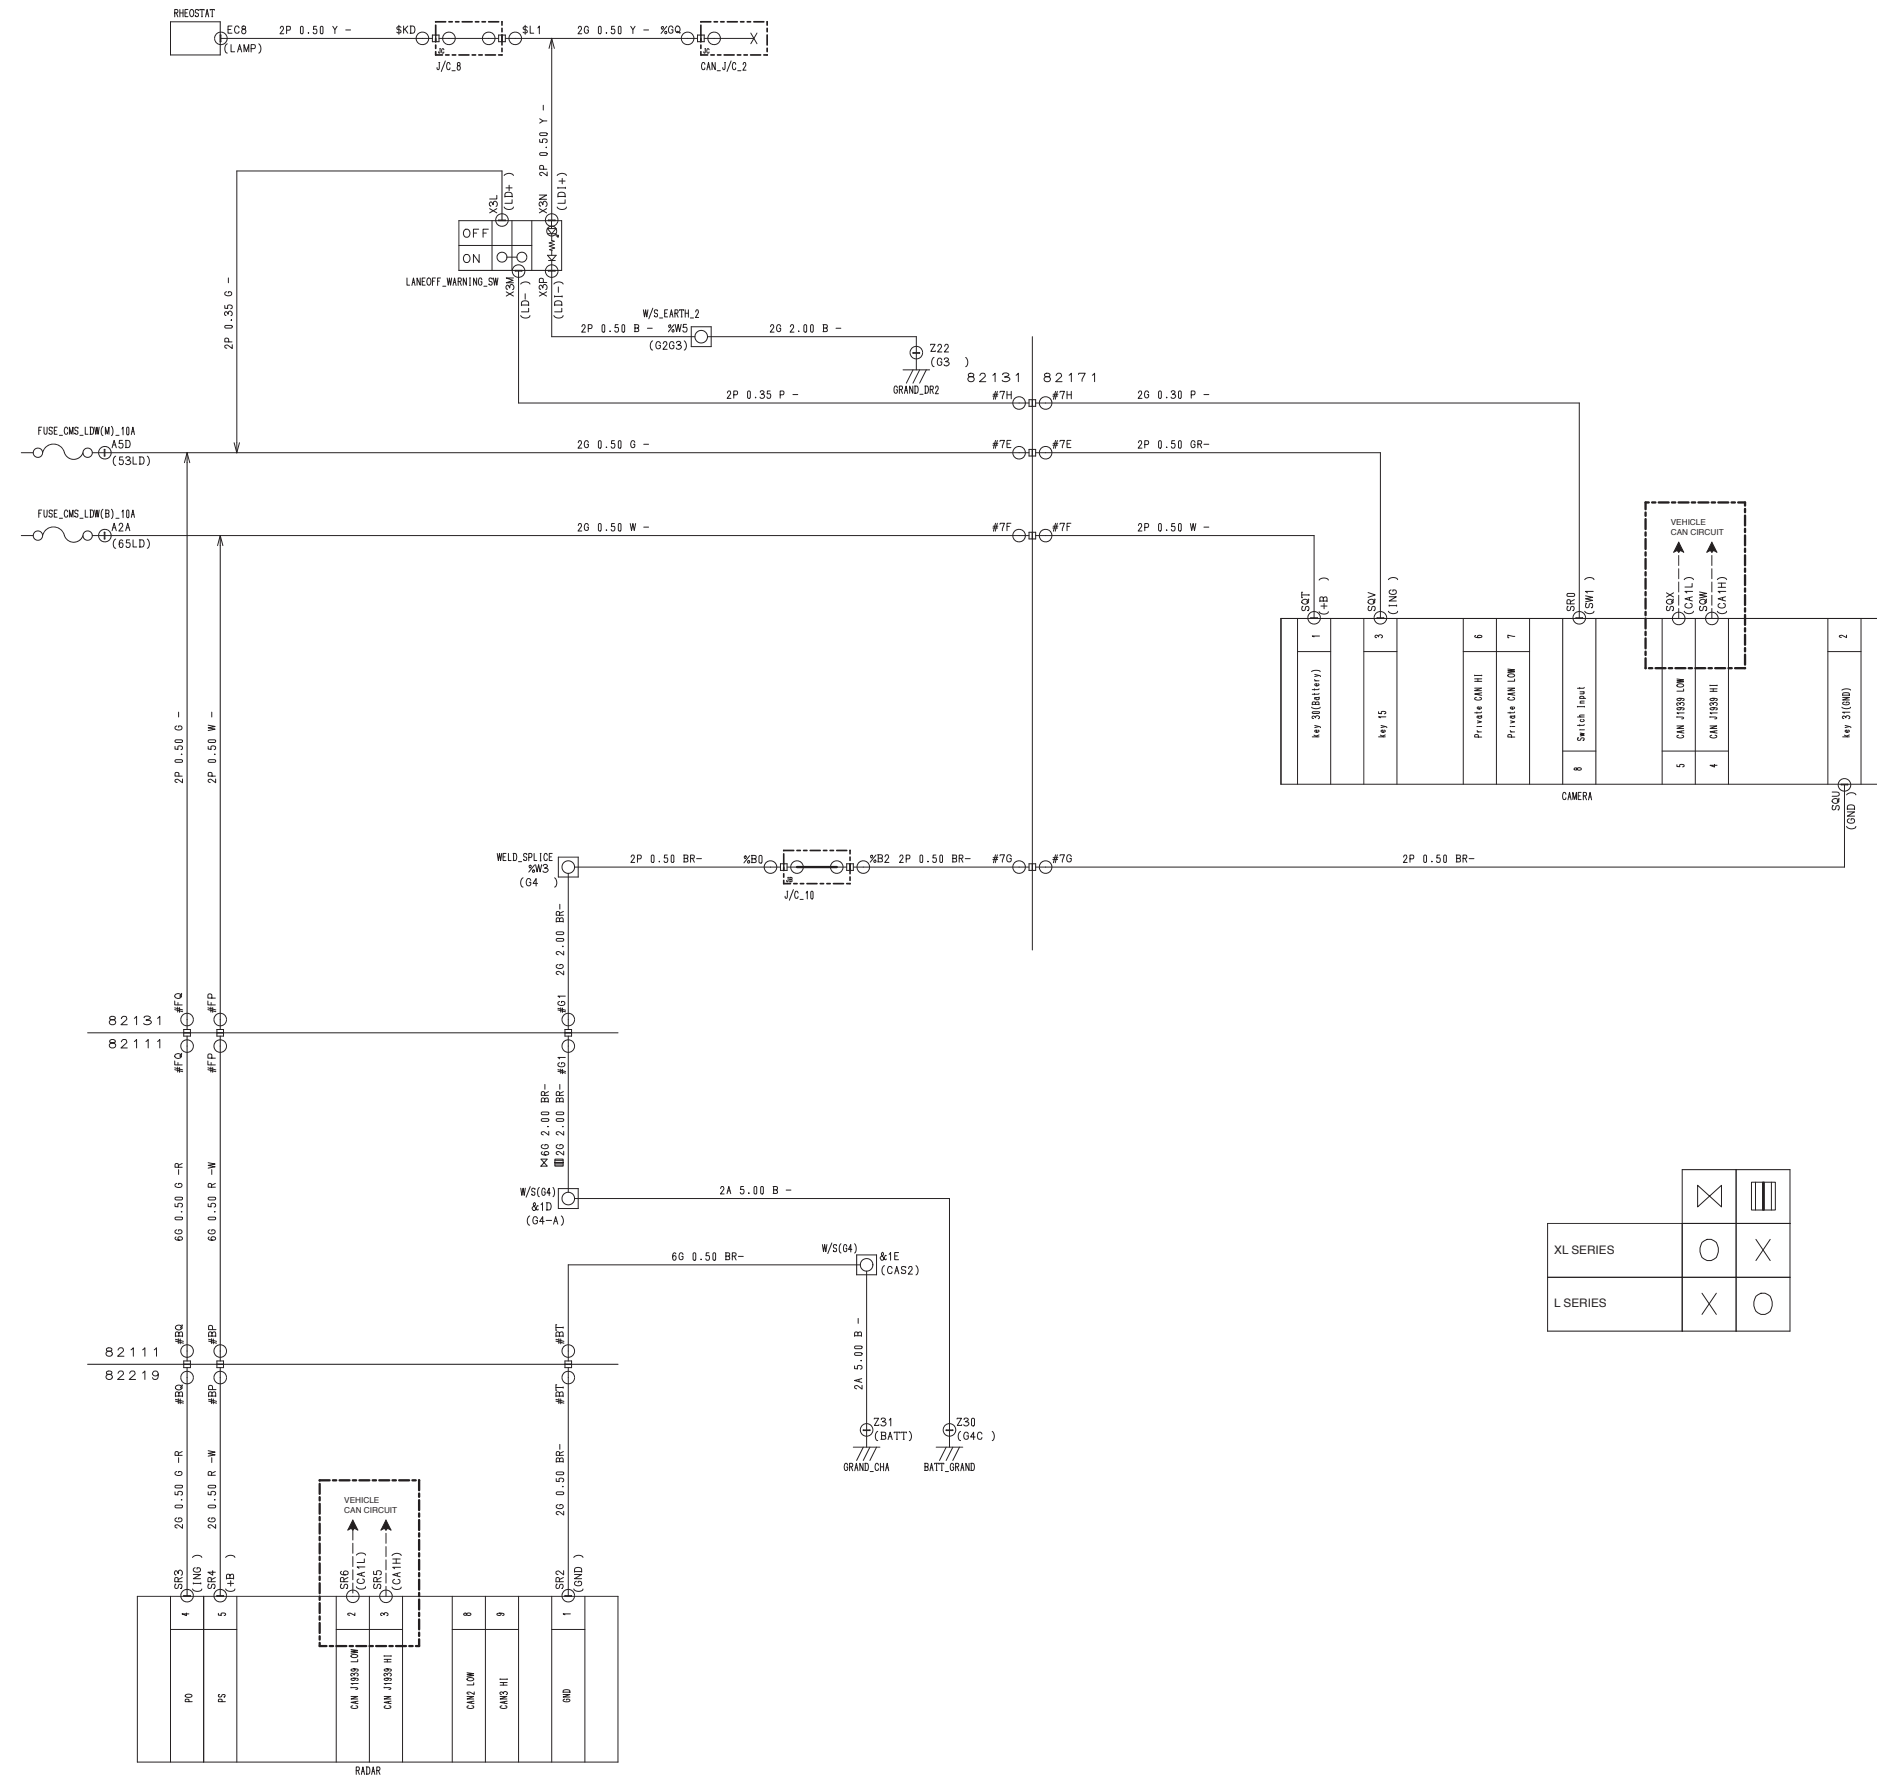
39. ABS CIRCUIT\_3 (HYDRAULIC BRAKE Ver. E)









## 40. HYDRAULIC BRAKE SYSTEM CIRCUIT

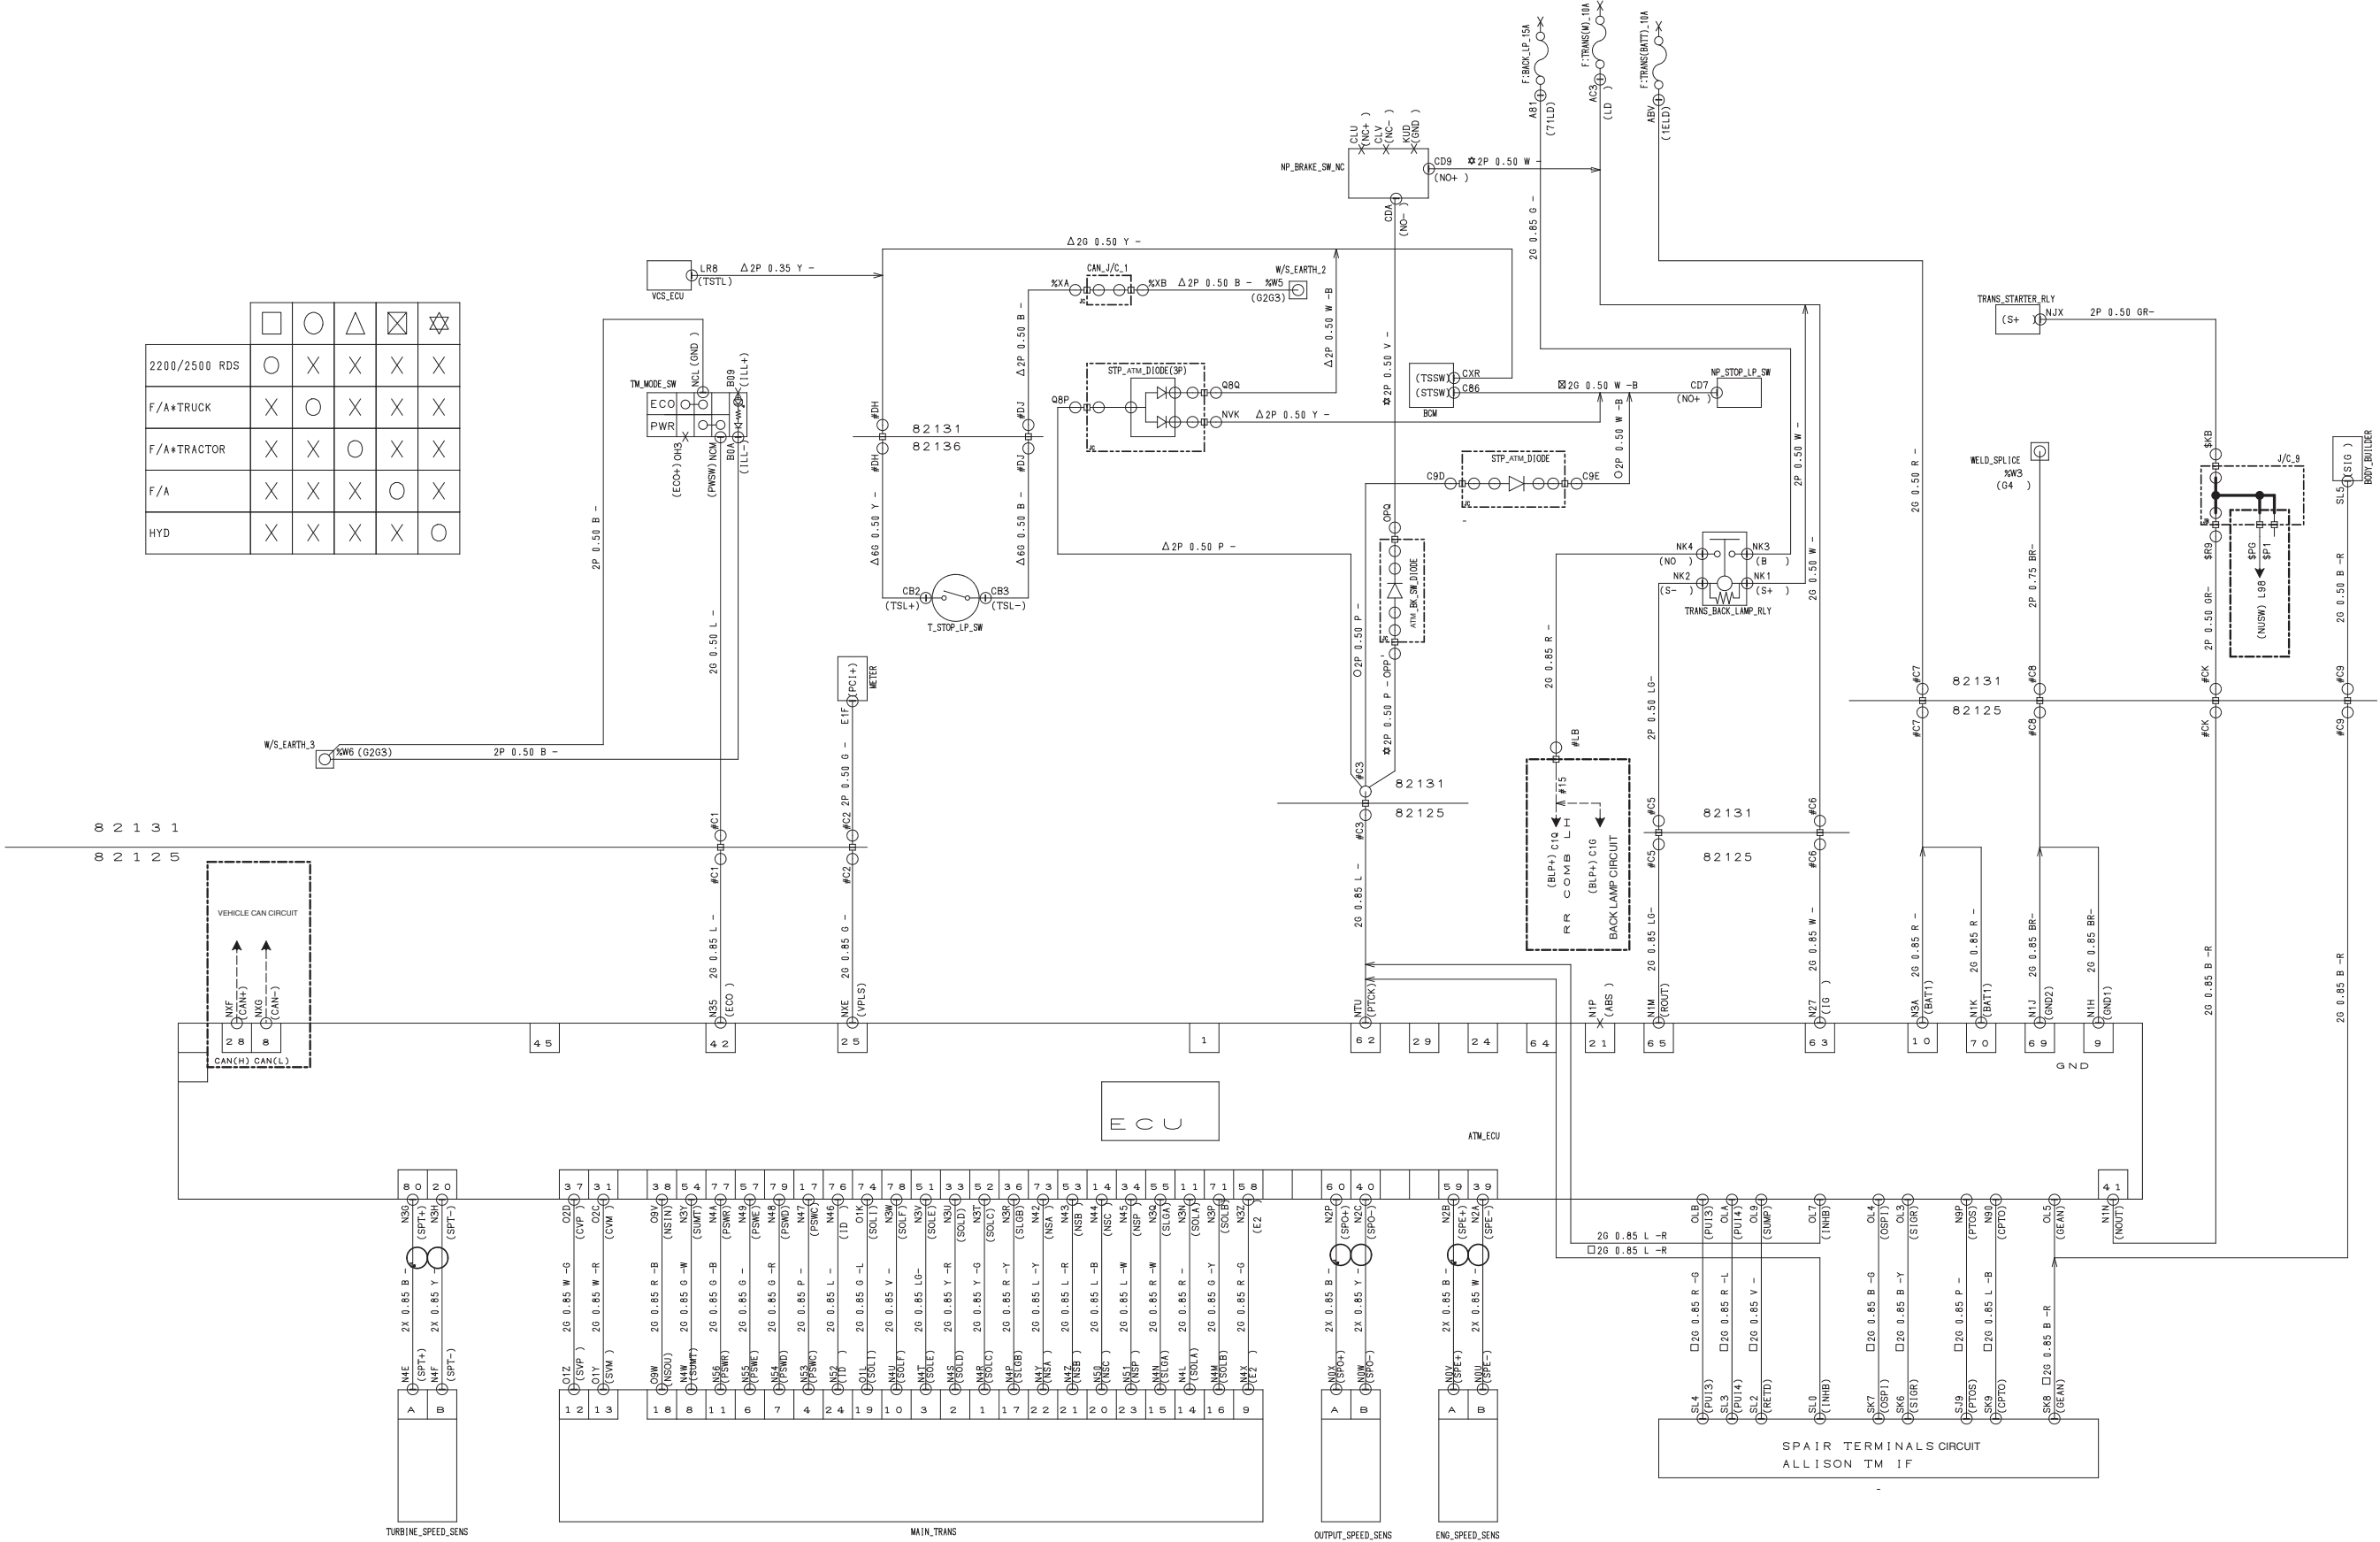


#### 41. CMS, ACC & LDW CIRCUIT

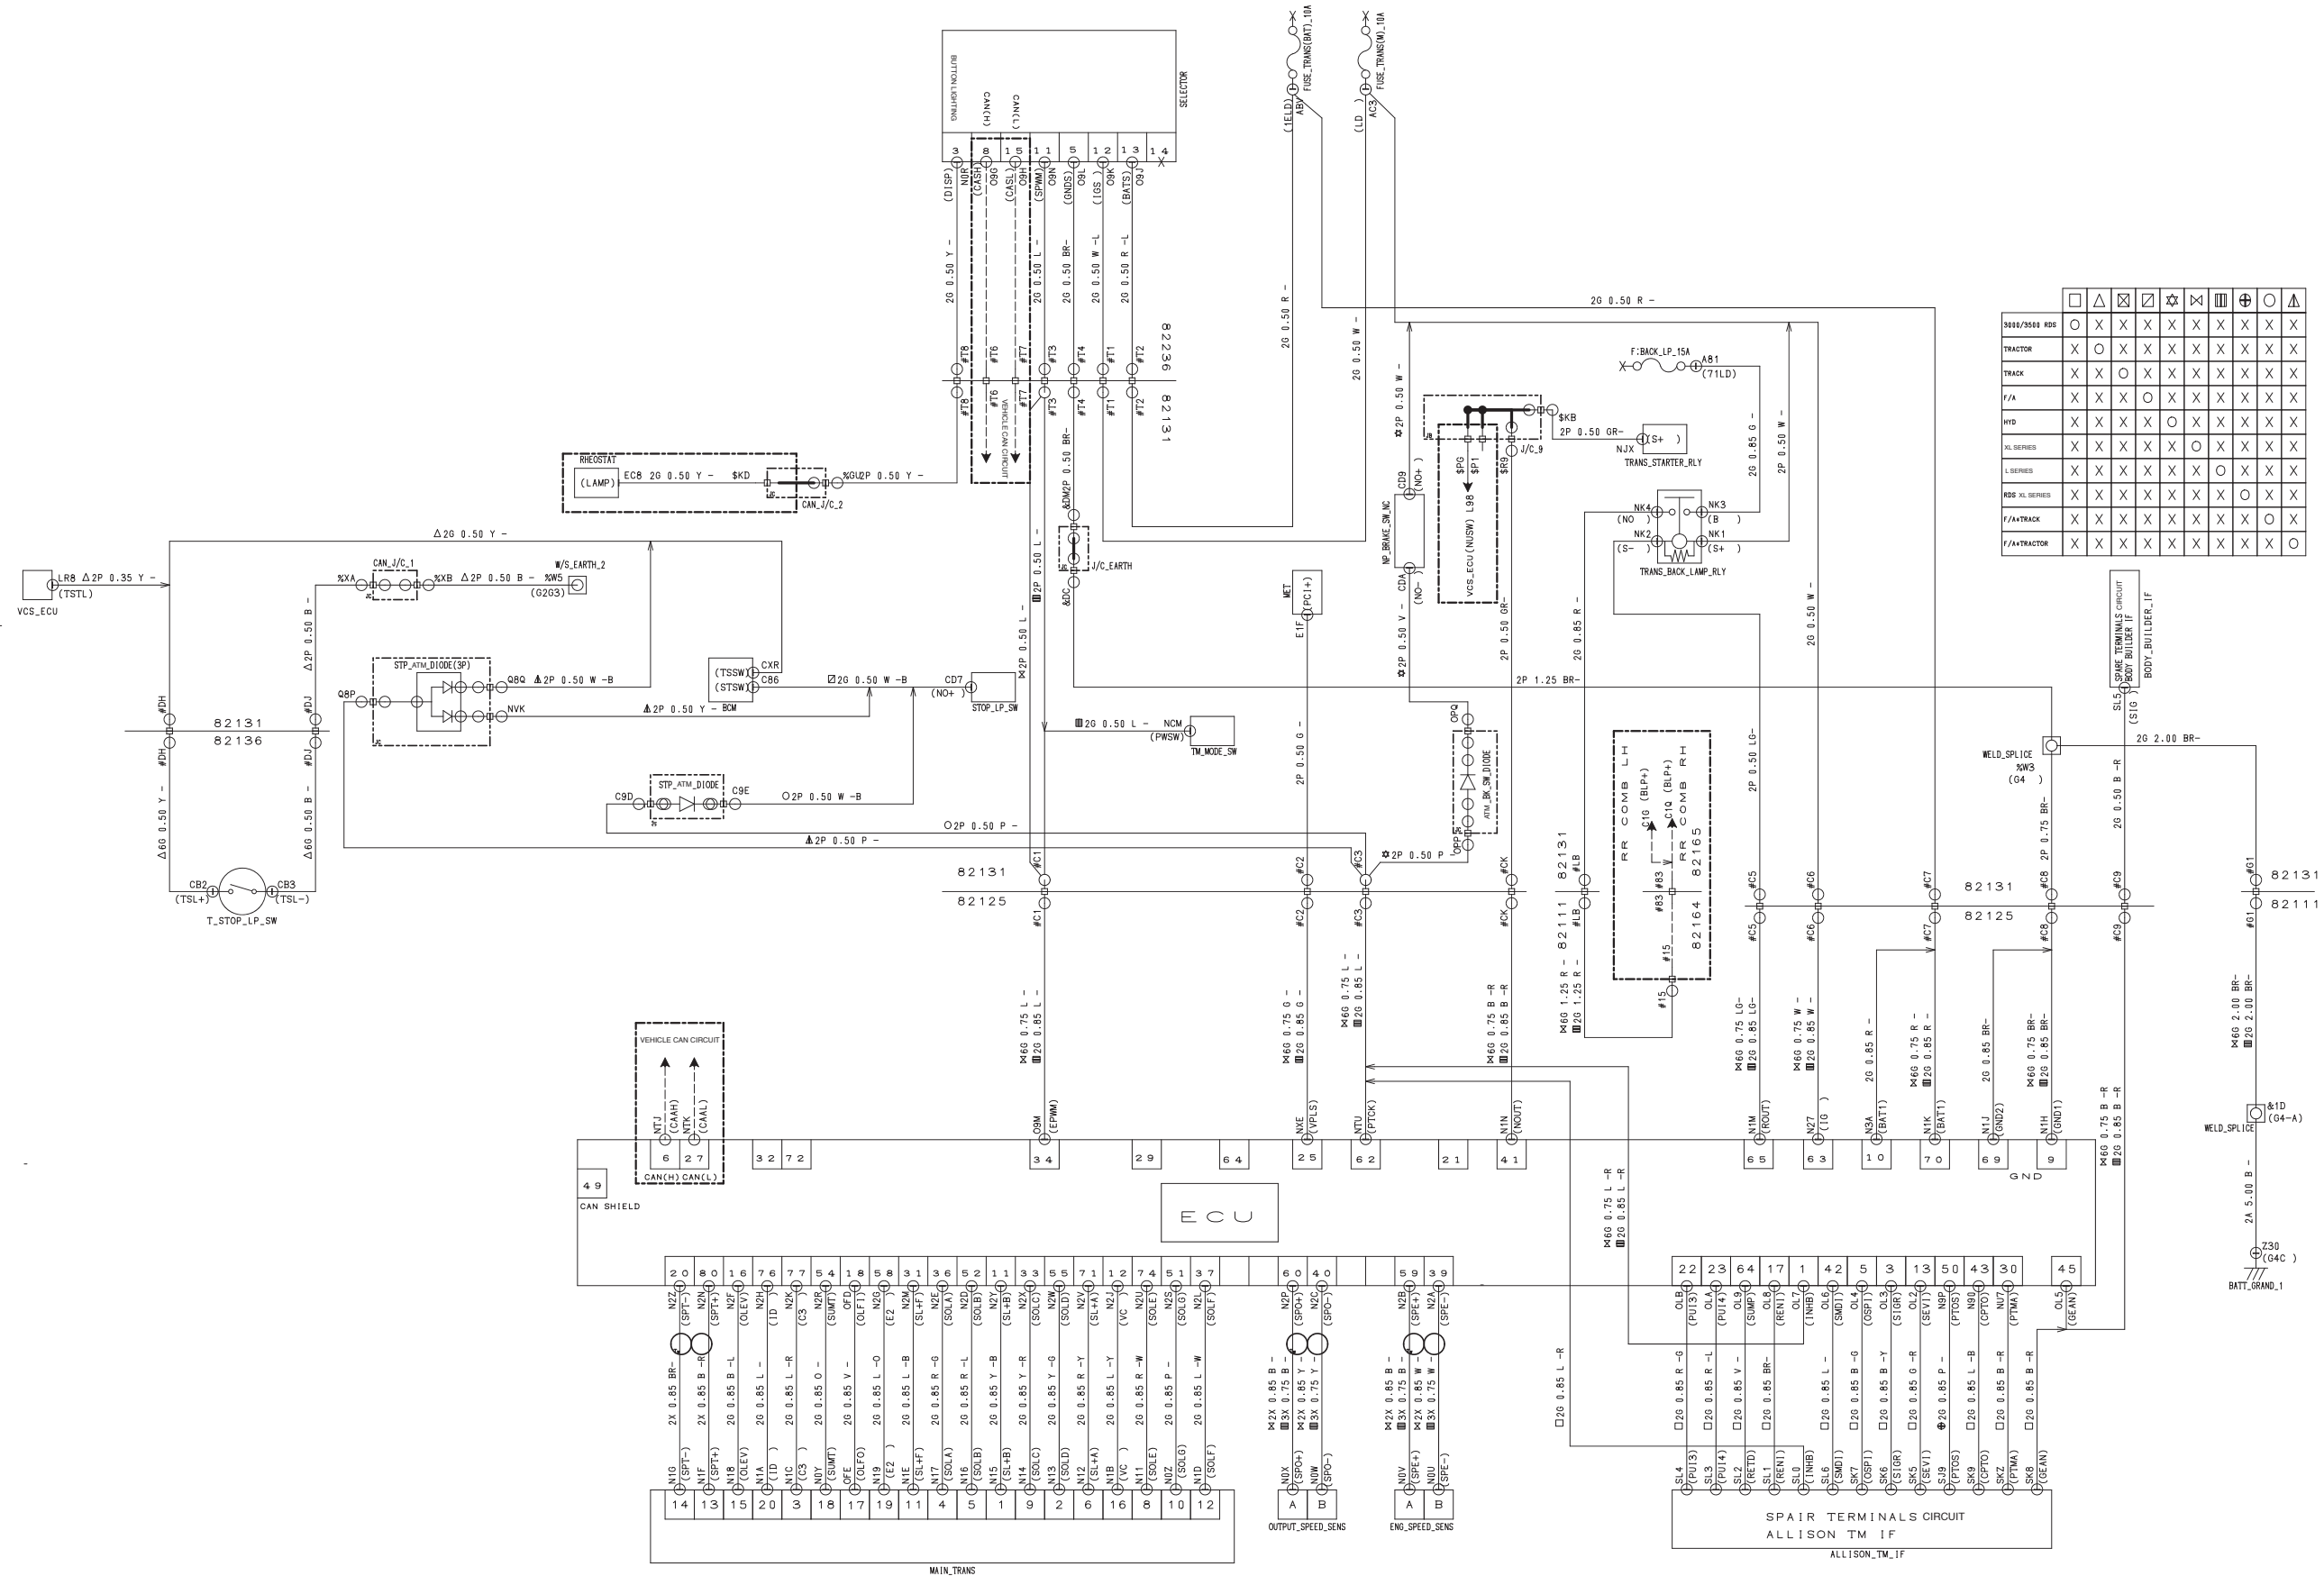


		
XL SERIES		
L SERIES		

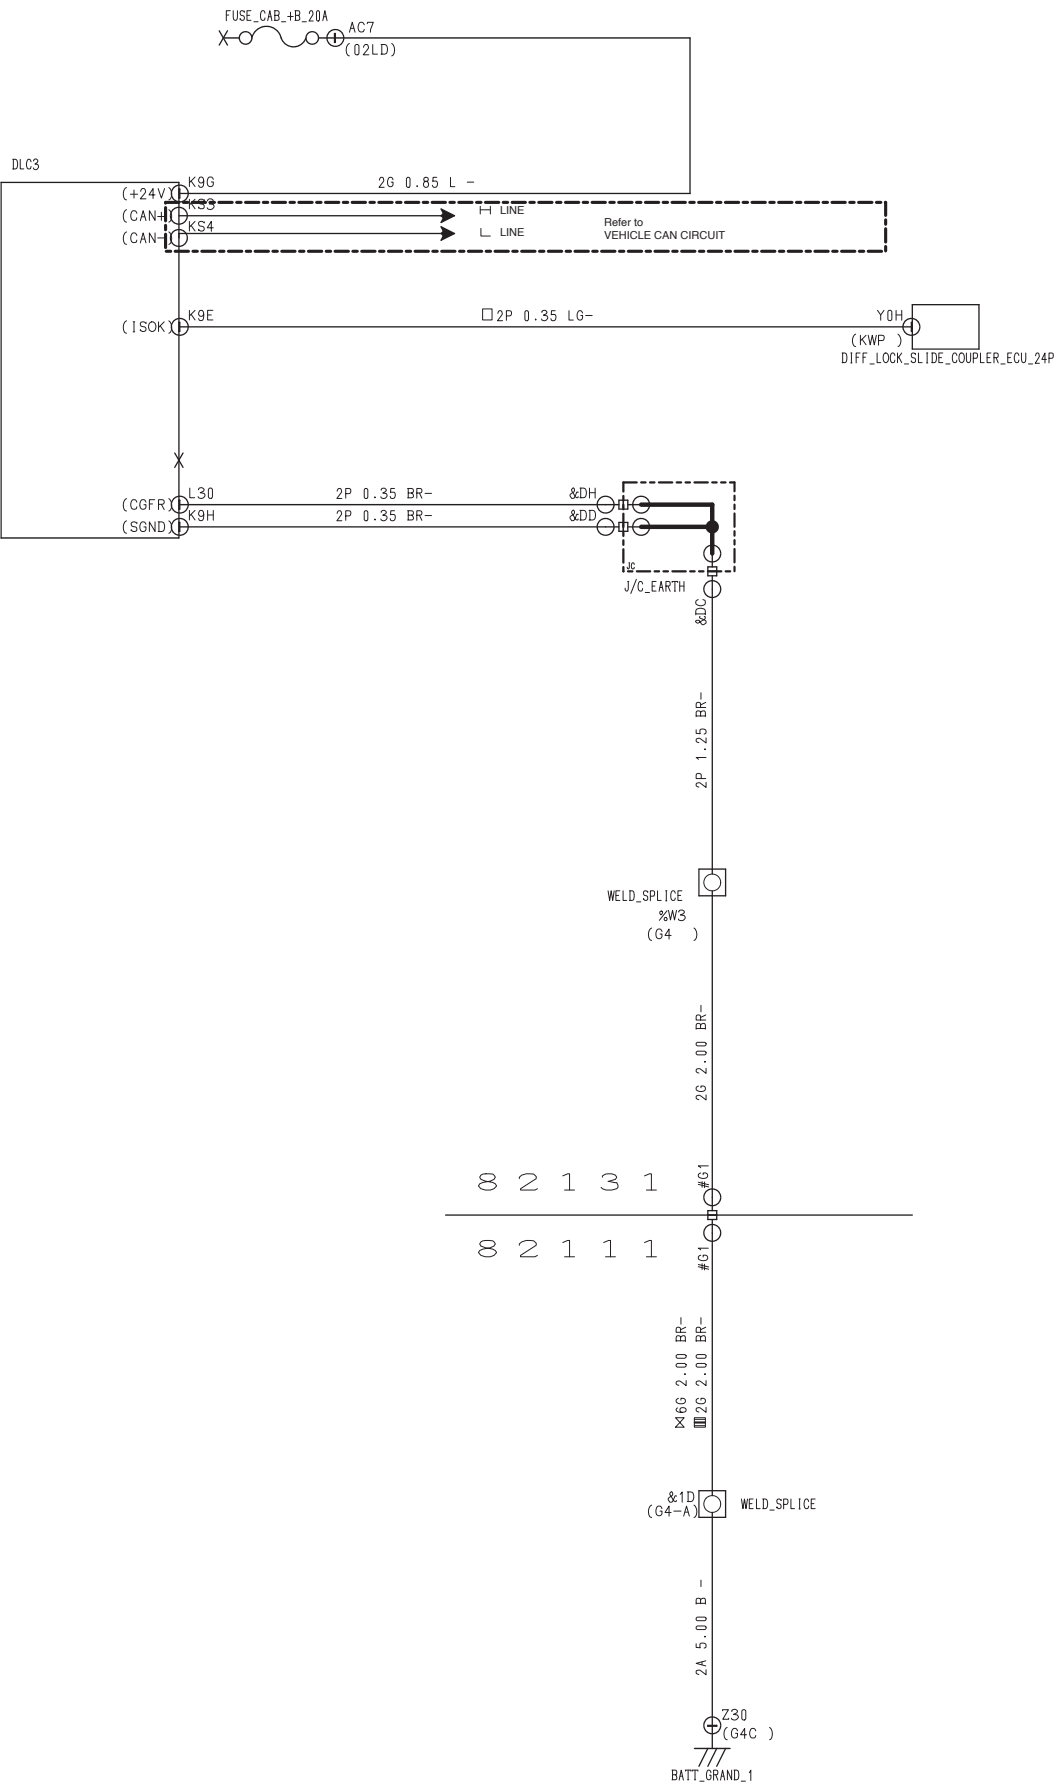
42. ALLISON 2200/2500 TRANS BASIC CIRCUIT



### 43. ALLISON 3000RDS TRANS BASIC CIRCUIT

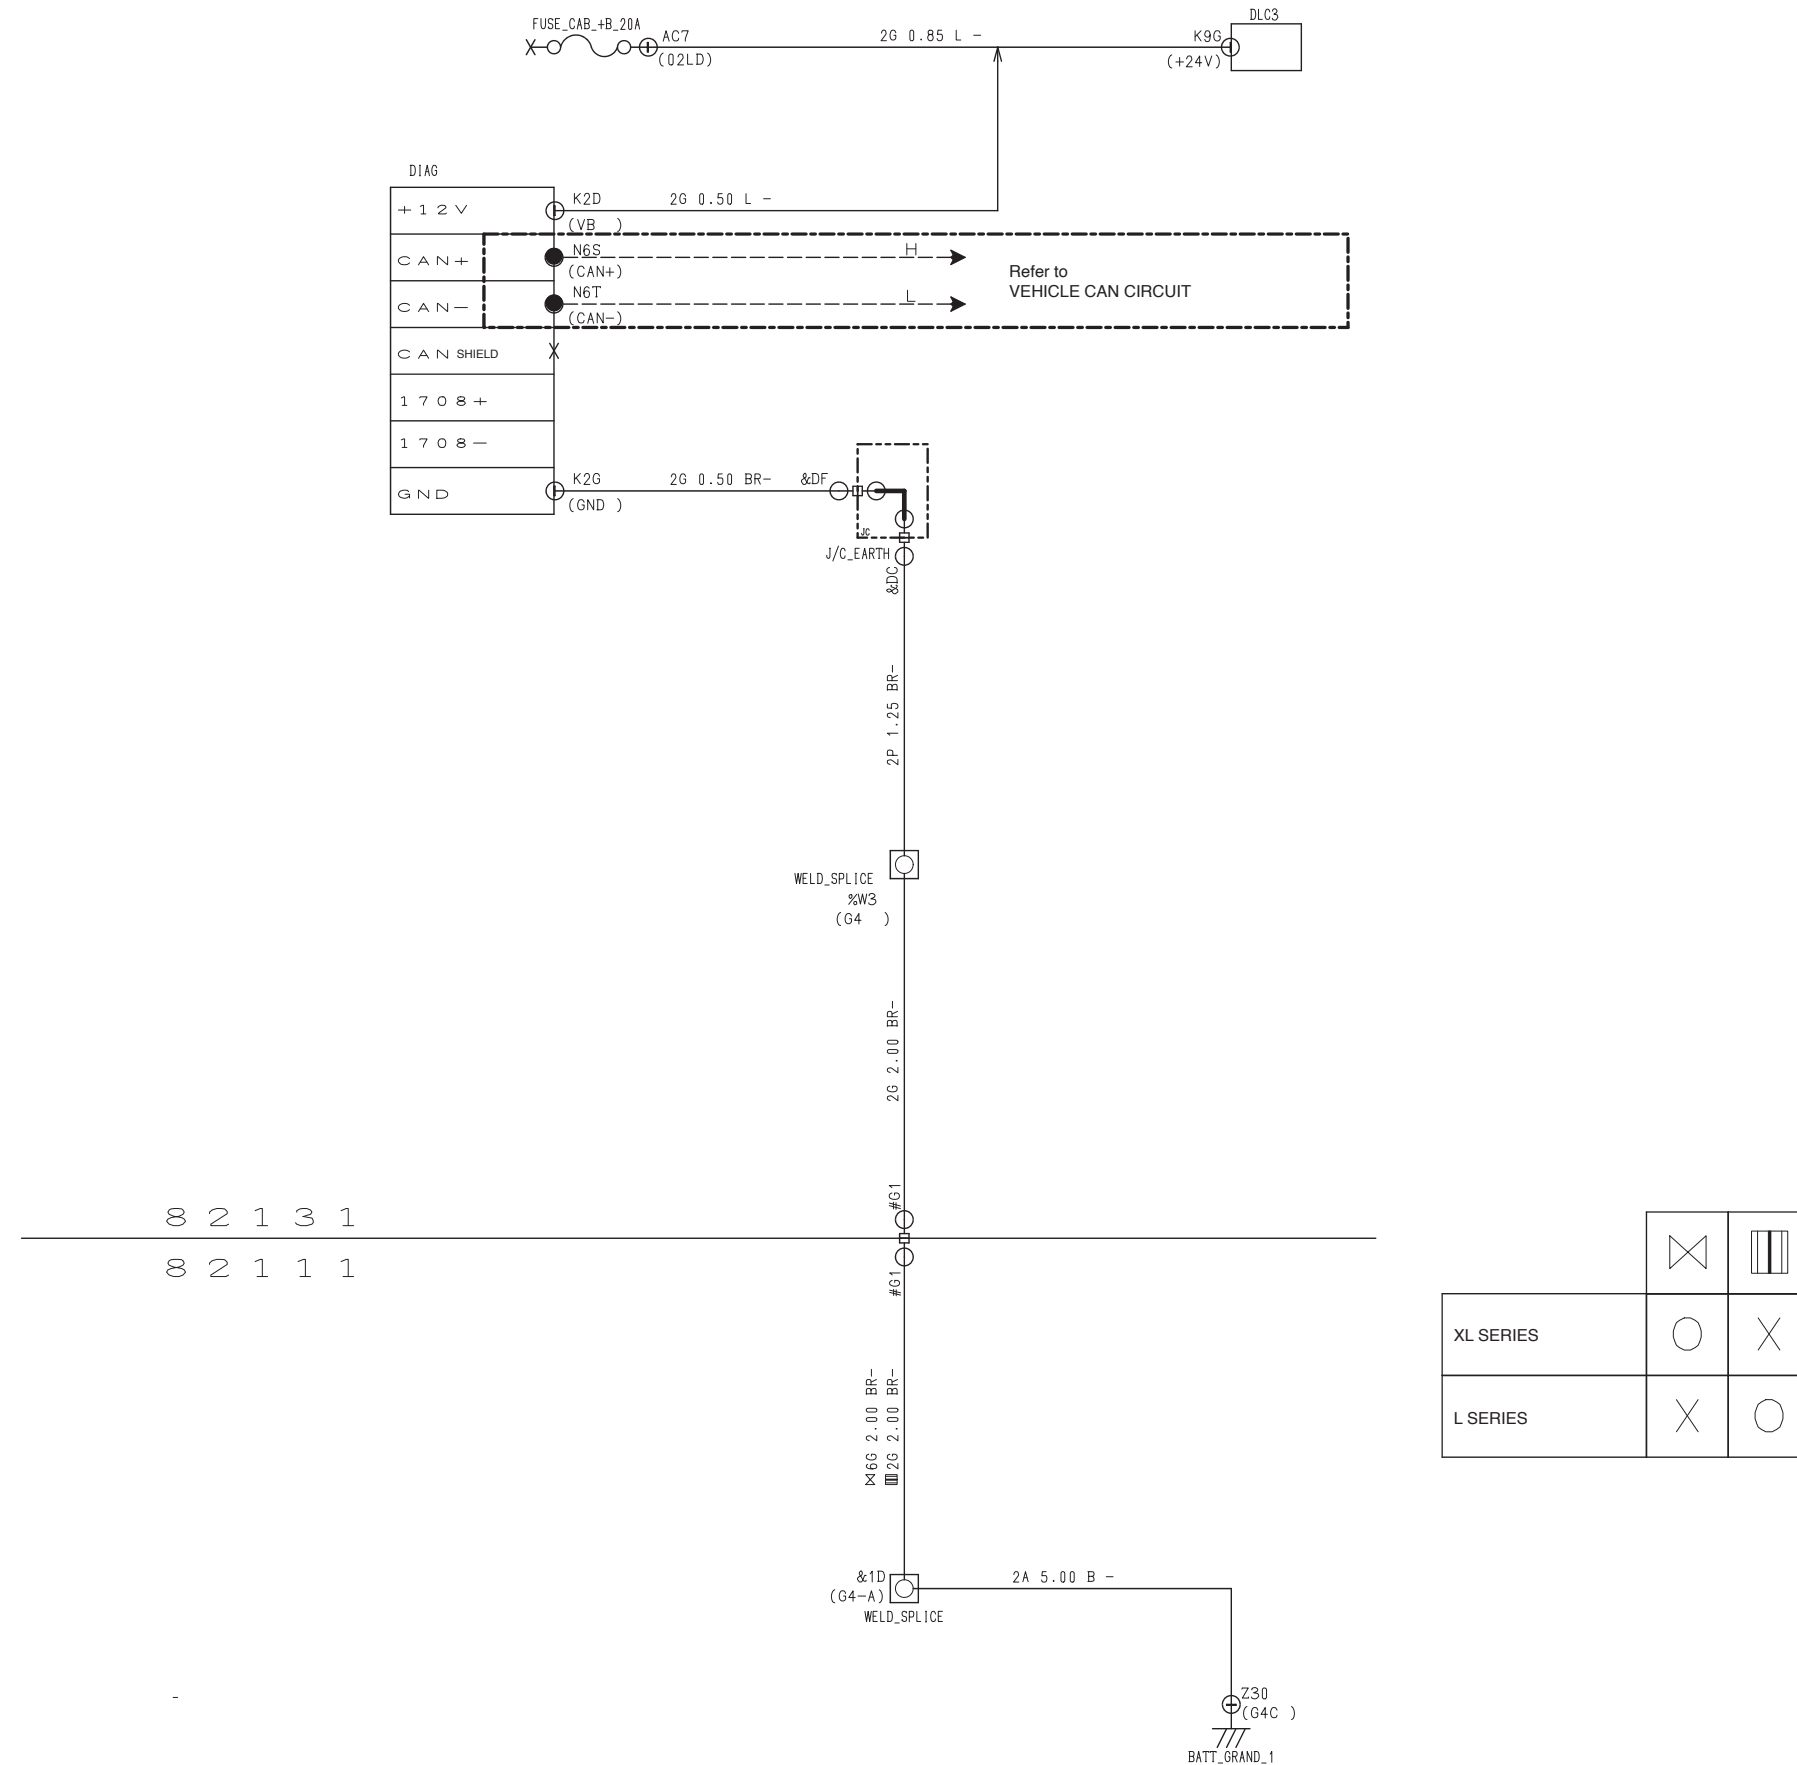


44. DIAGNOSIS CIRCUIT

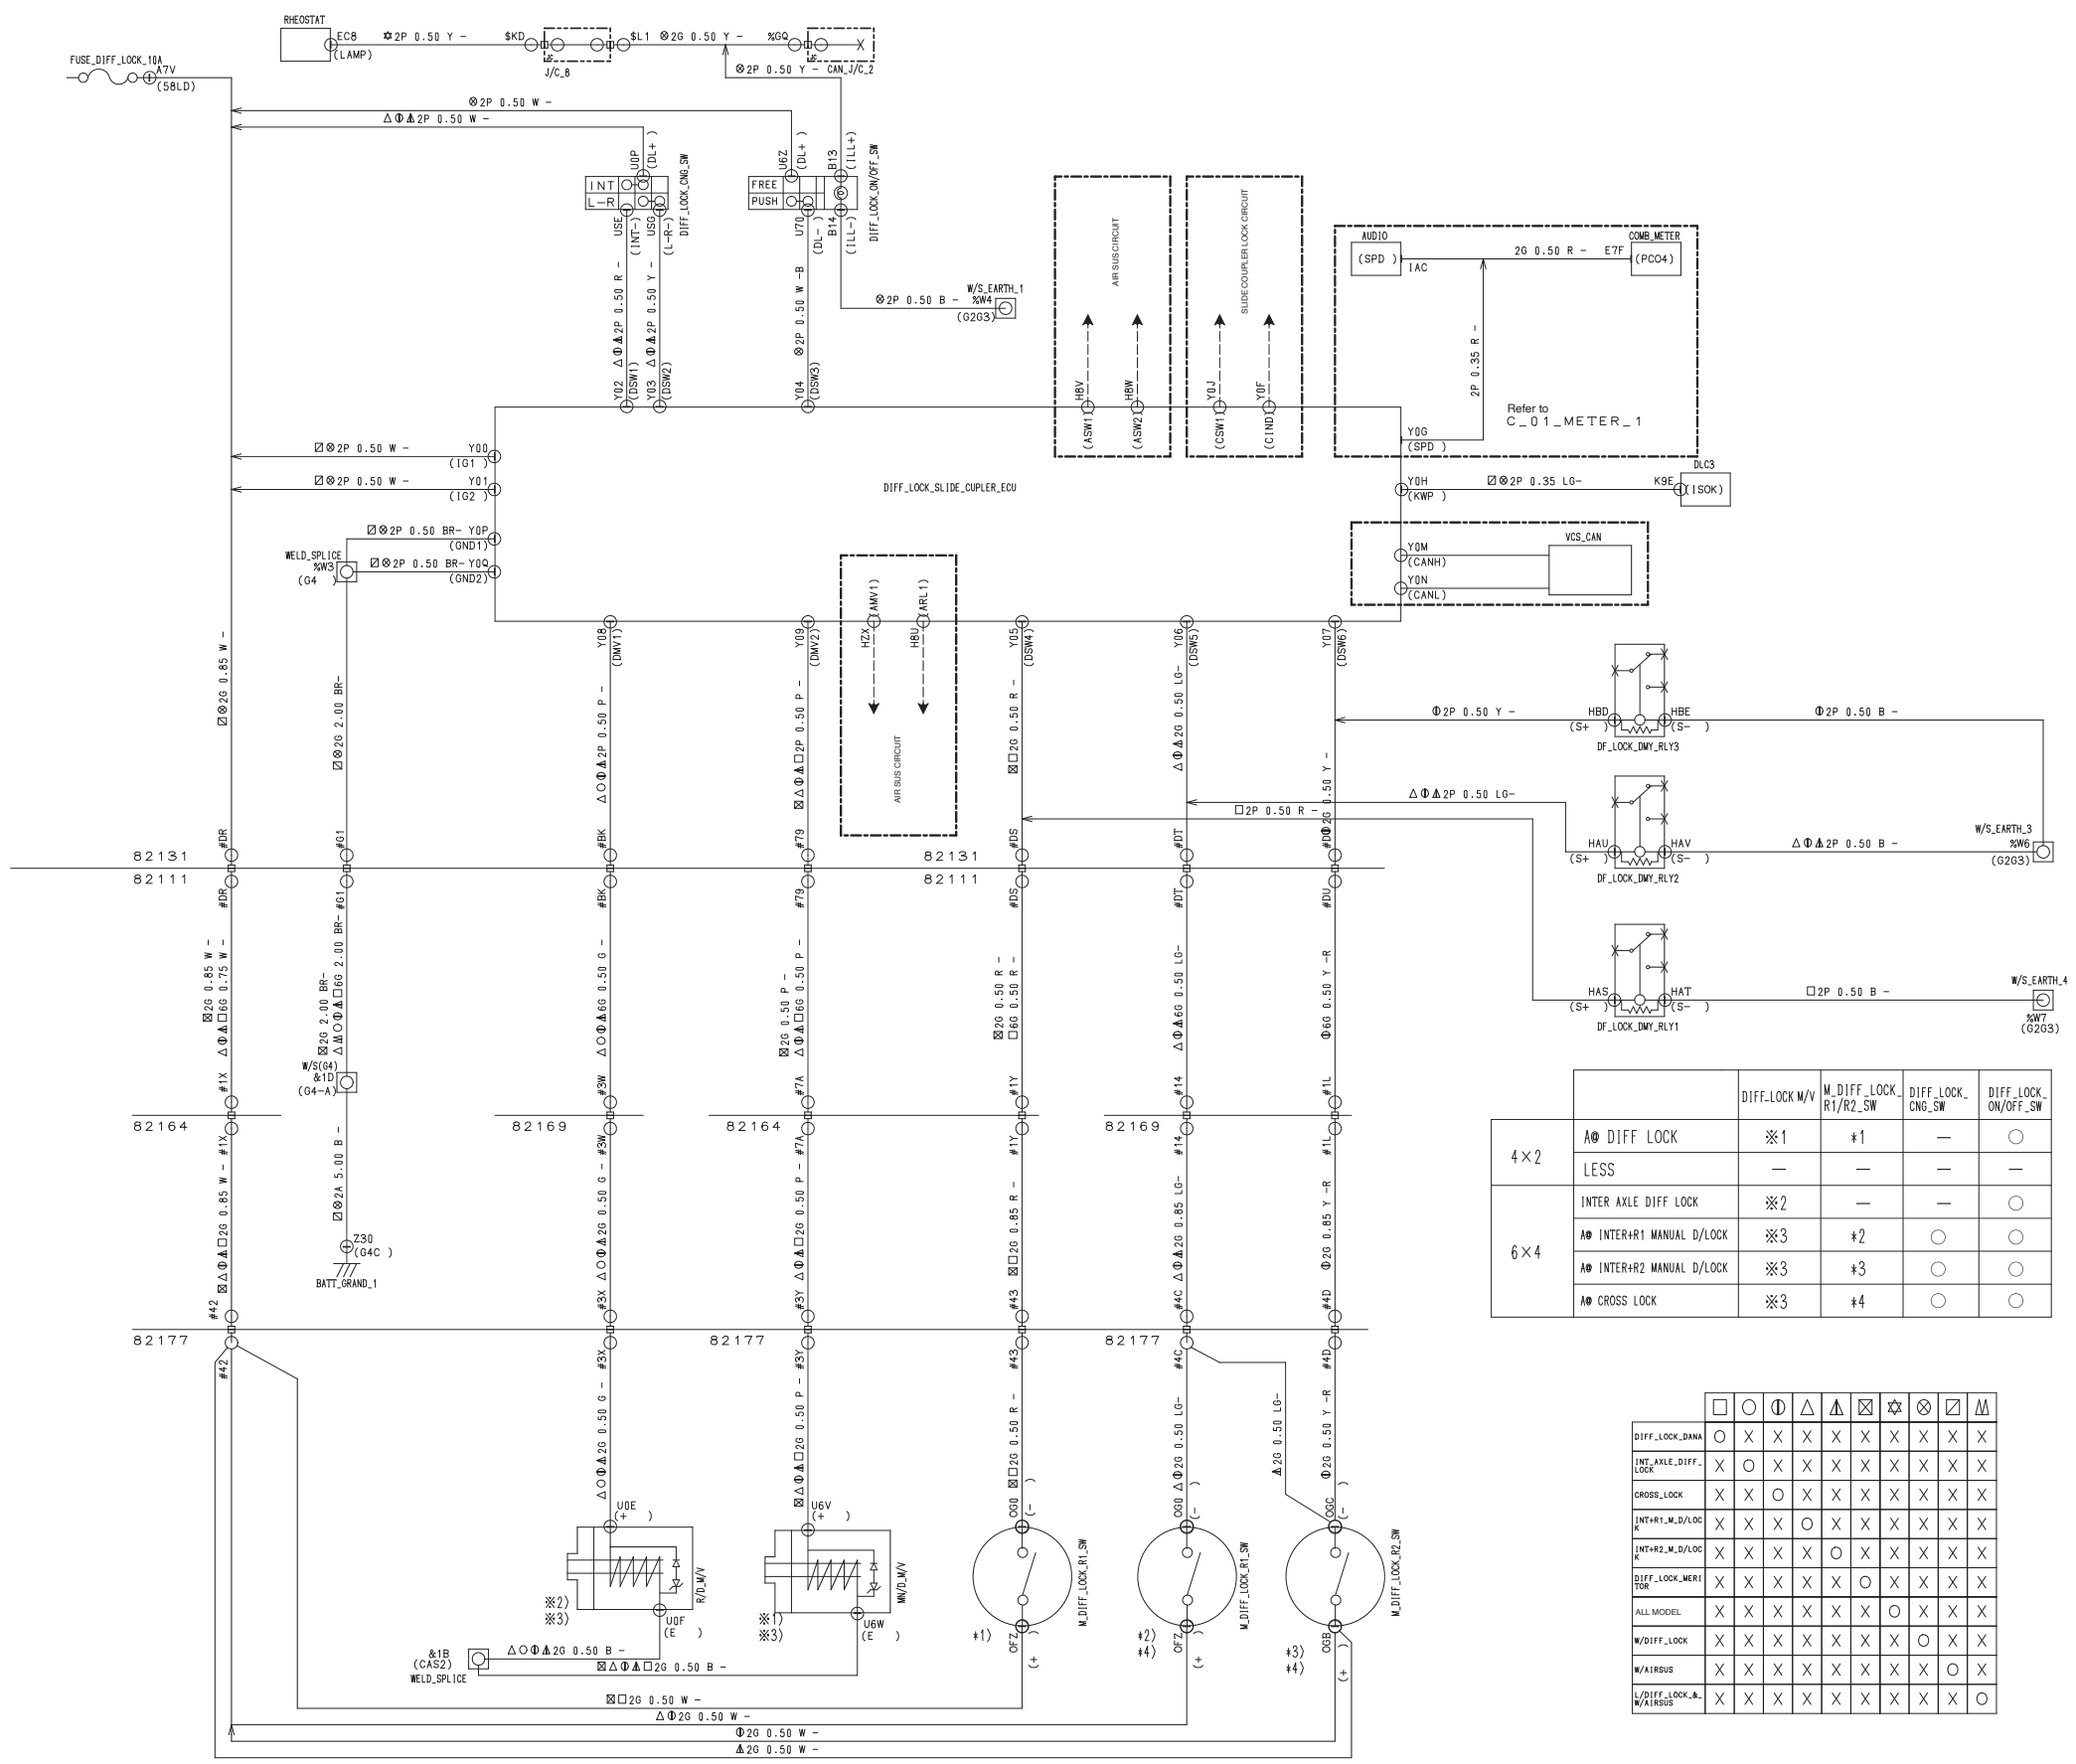


DIFF_LOCK			
XL SERIES			
L SERIES			

## 45. DIAG' CONNECTOR CIRCUIT



46. DIFF LOCK CONTROL CIRCUIT

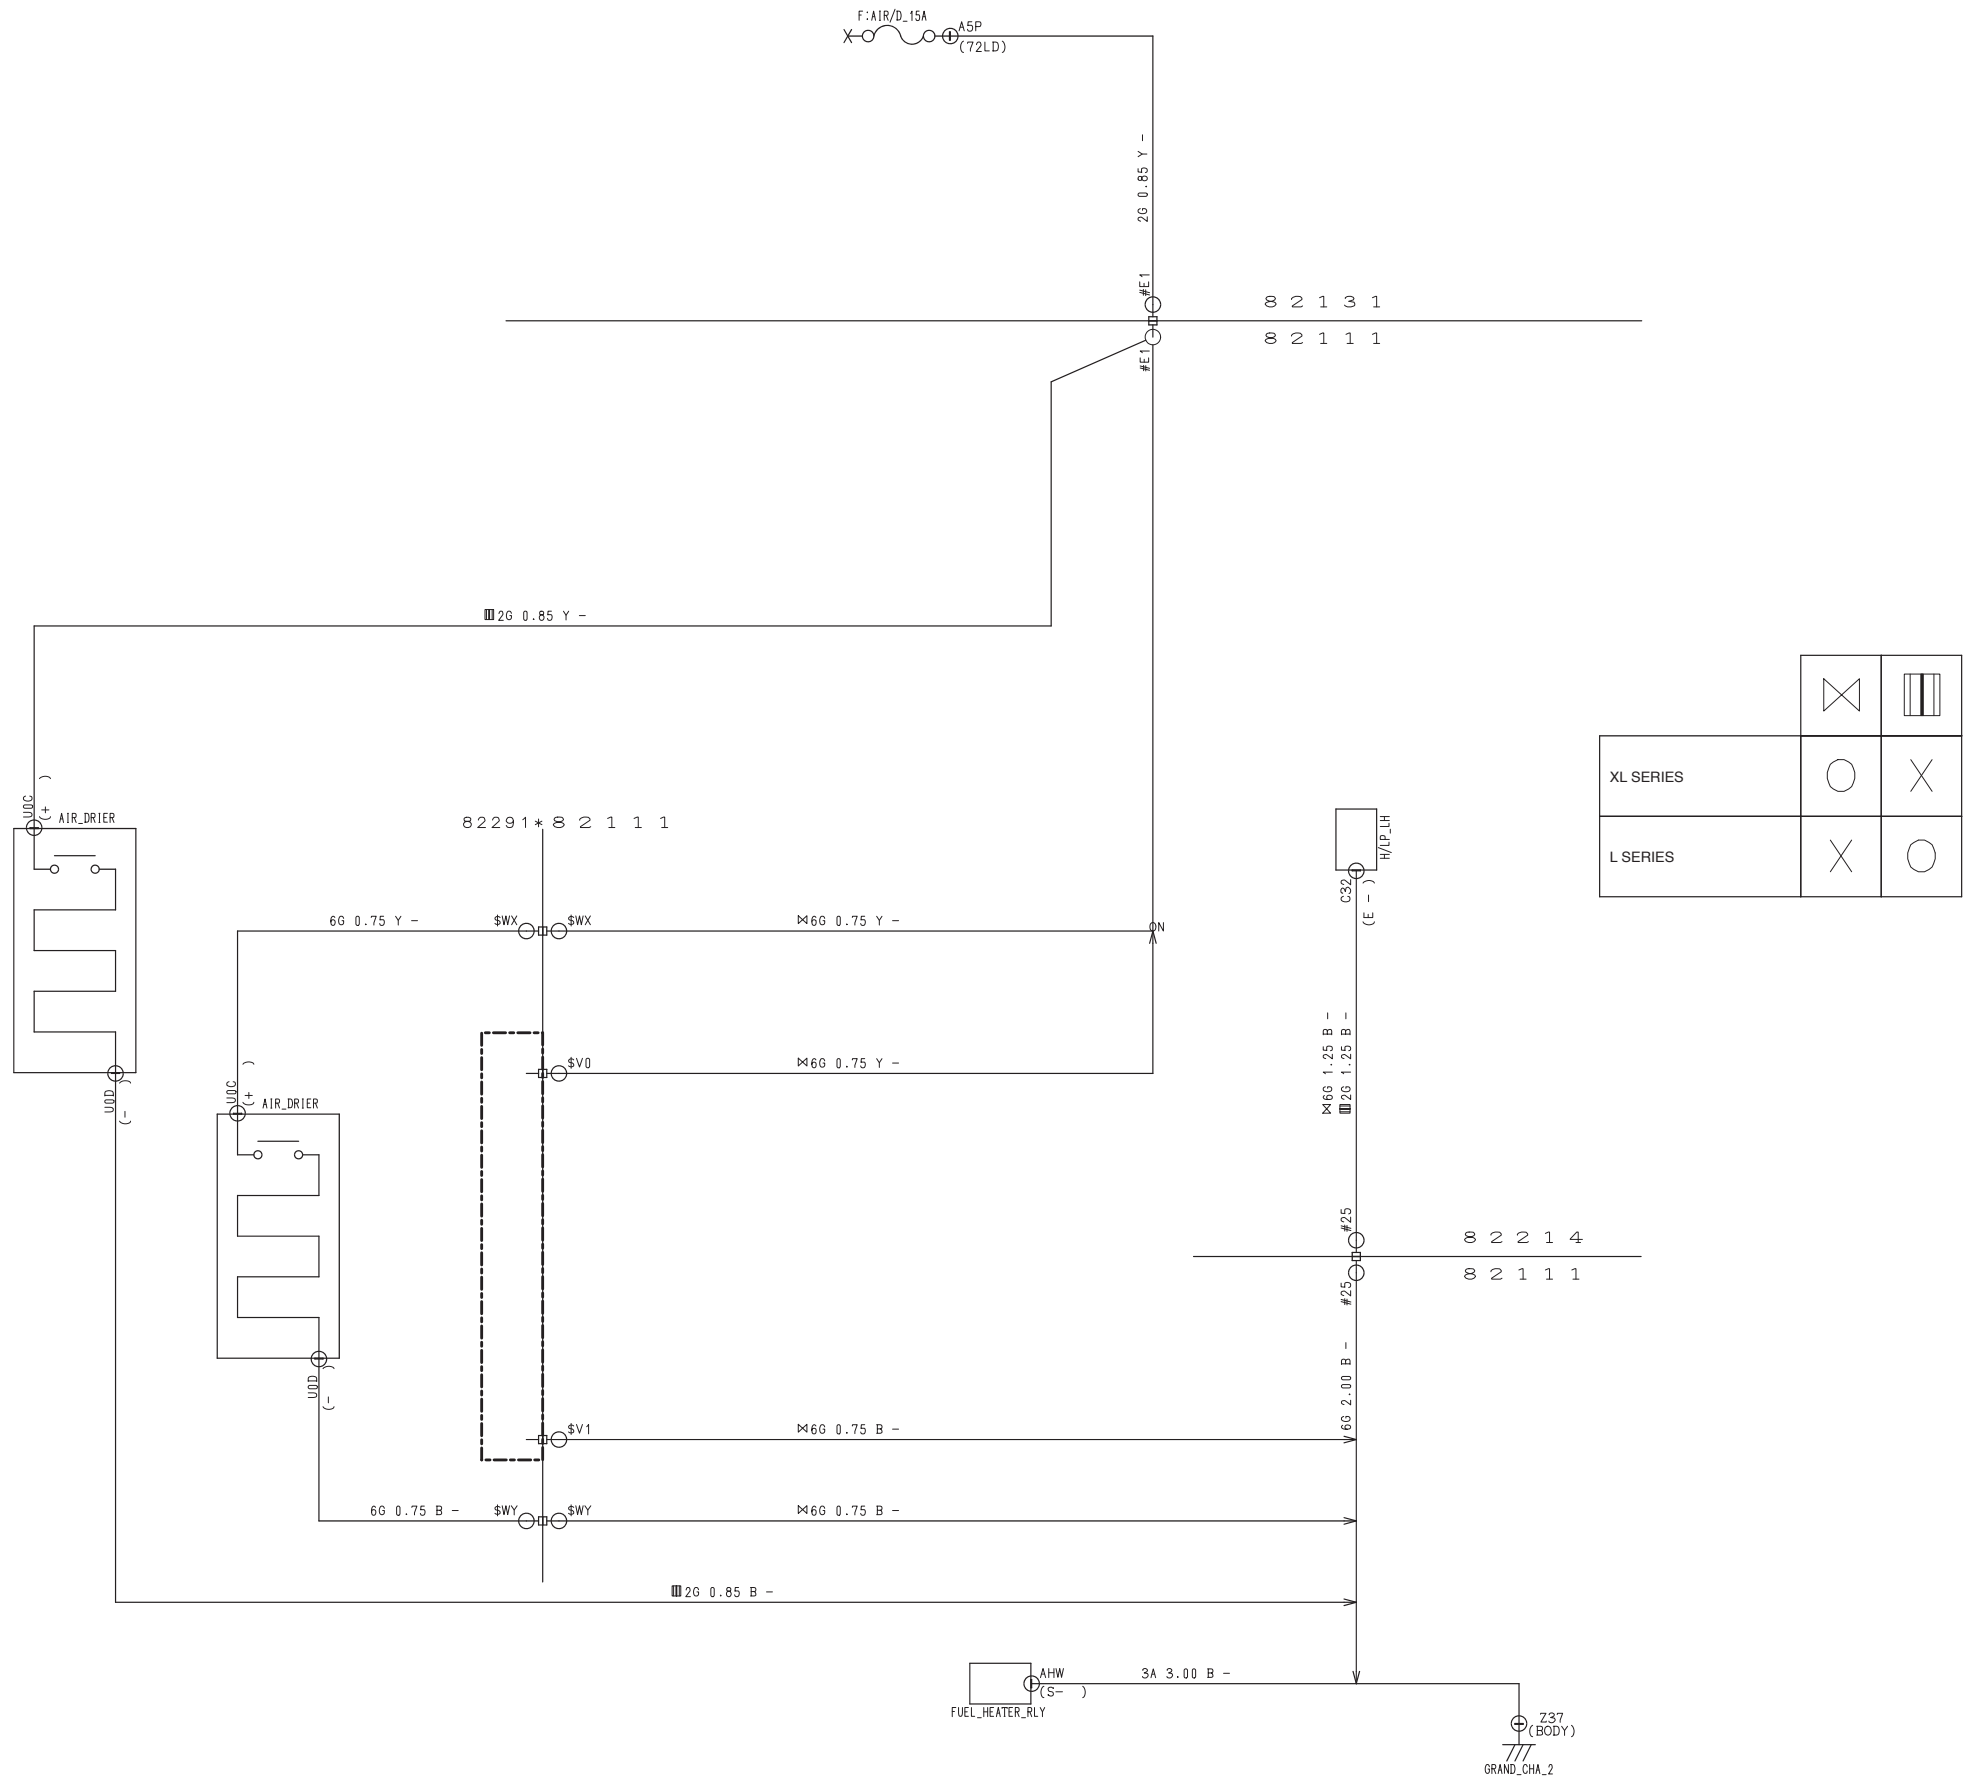


	DIFF-LOCK M/V	M_DIFF_LOCK_R1/R2_SW	DIFF_LOCK_CNG_SW	DIFF_LOCK_ON/OFF_SW
4×2	⊗ DIFF LOCK	※1	⊕	○
	LESS	—	—	—
6×4	INTER AXLE DIFF LOCK	※2	—	○
	⊗ INTER+R1 MANUAL D/LOCK	※3	⊕	○
	⊗ INTER+R2 MANUAL D/LOCK	※3	⊕	○
	⊗ CROSS LOCK	※3	⊕	○

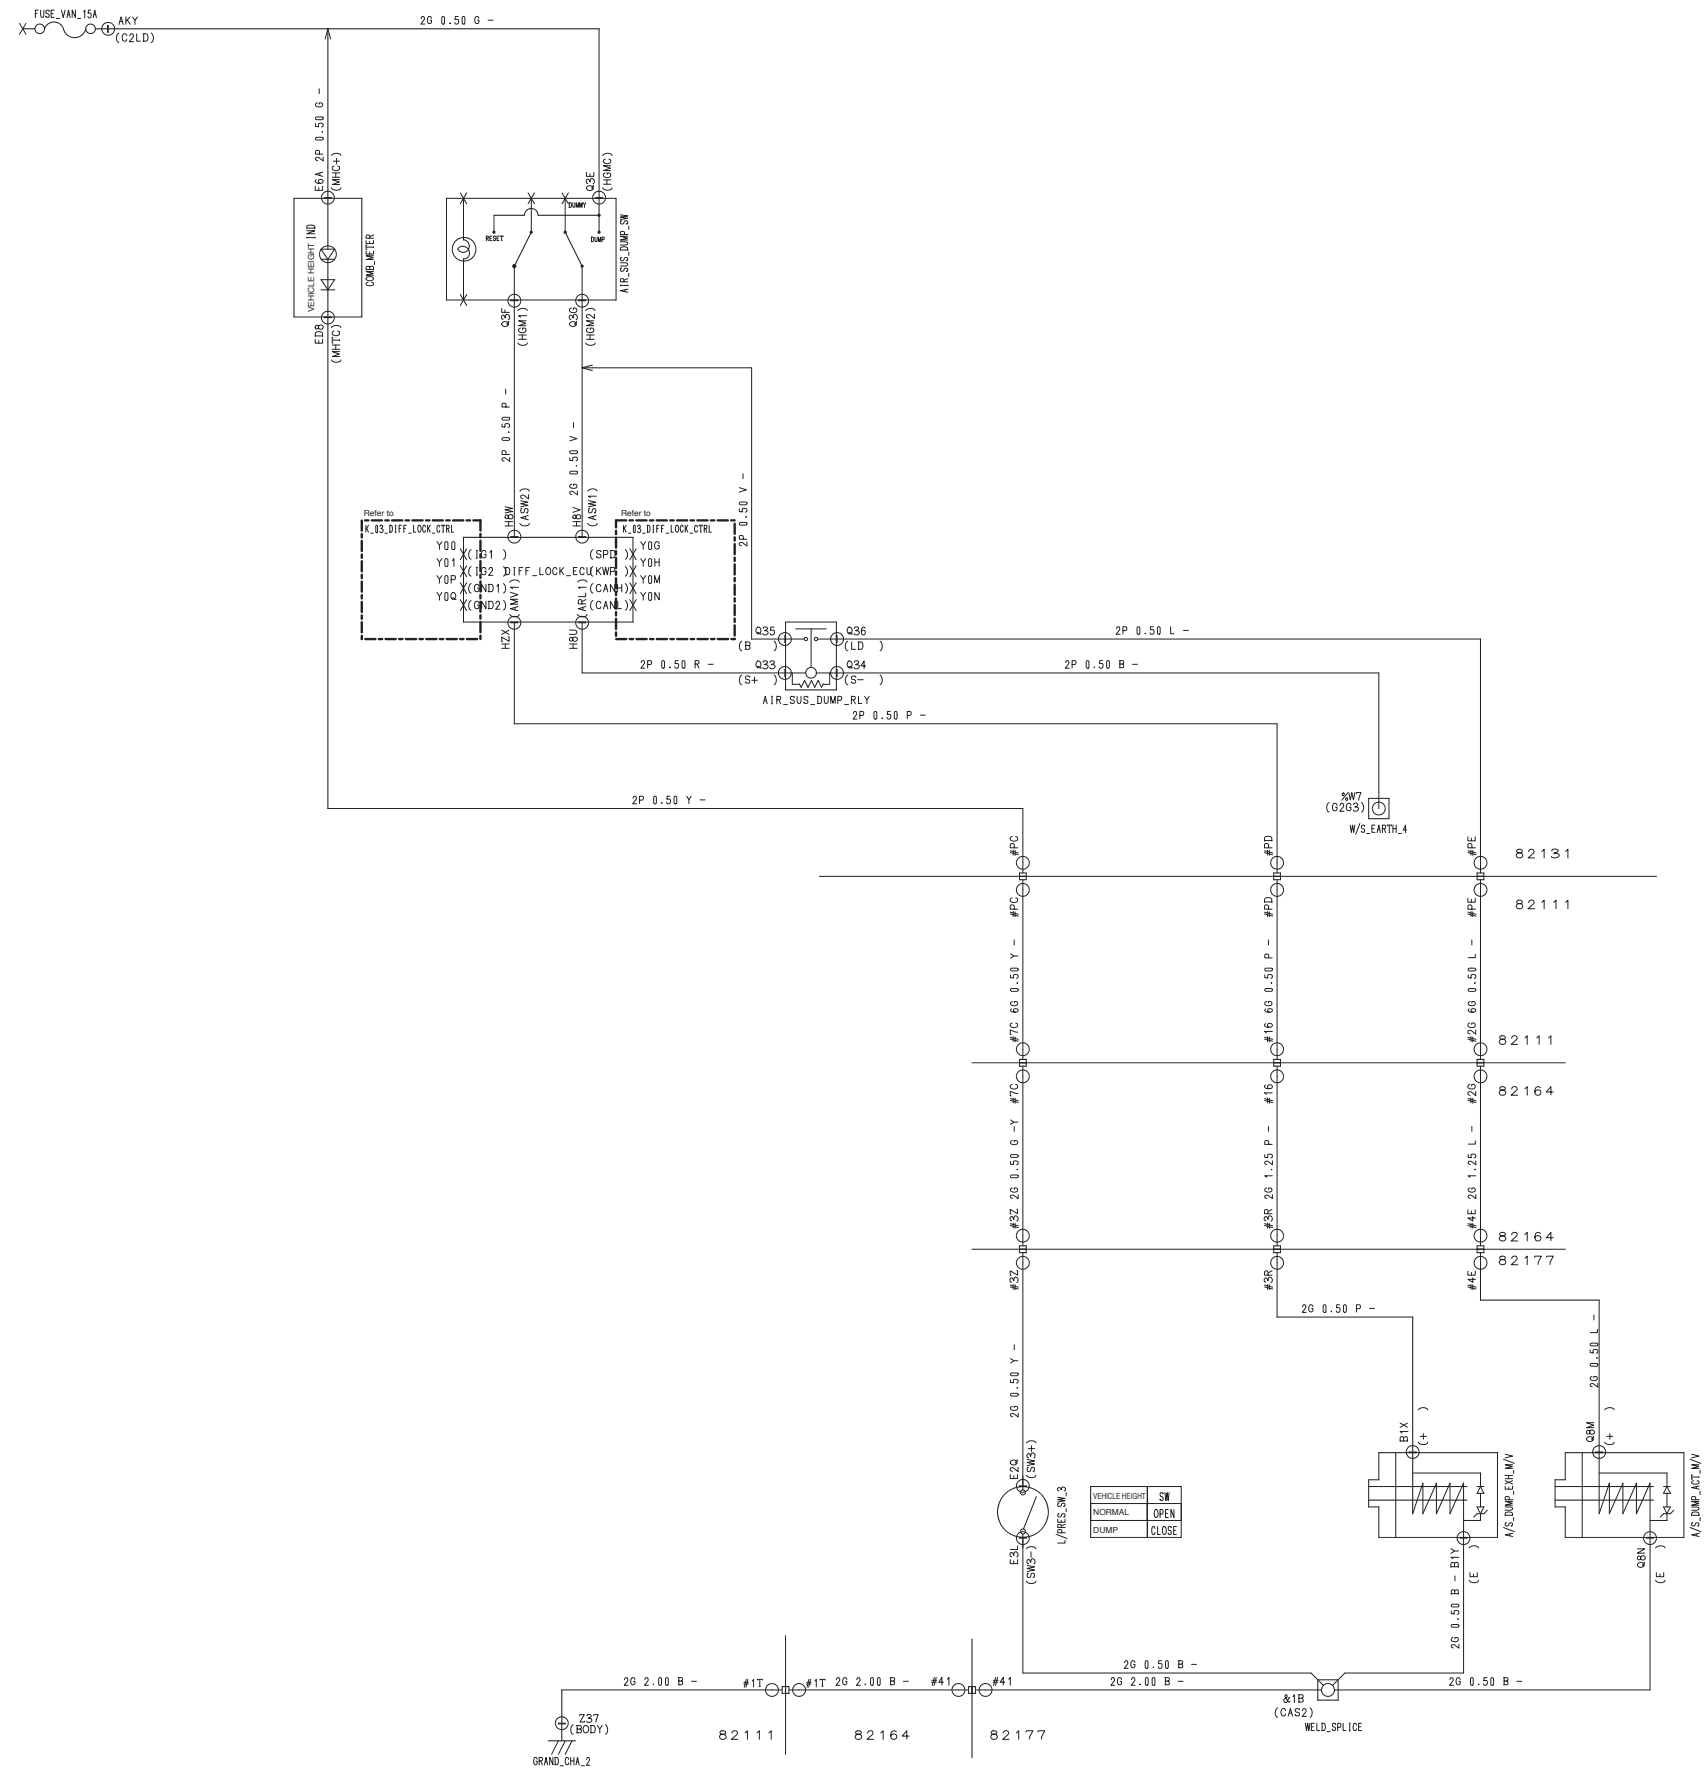
	□	○	⊕	△	⊗	⊕	⊗	⊕	⊗
DIFF_LOCK_DANA	○	×	×	×	×	×	×	×	×
INT_AXLE_DIFF_LOCK	×	○	×	×	×	×	×	×	×
CROSS_LOCK	×	×	○	×	×	×	×	×	×
INT+R1_M/D/LOCK	×	×	×	○	×	×	×	×	×
INT+R2_M/D/LOCK	×	×	×	×	○	×	×	×	×
DIFF_LOCK_MERITOR	×	×	×	×	×	○	×	×	×
ALL MODEL	×	×	×	×	×	×	○	×	×
W/DIFF_LOCK	×	×	×	×	×	×	×	○	×
W/1RSUS	×	×	×	×	×	×	×	×	○
L/DIFF_LOCK_&W/1RSUS	×	×	×	×	×	×	×	×	○



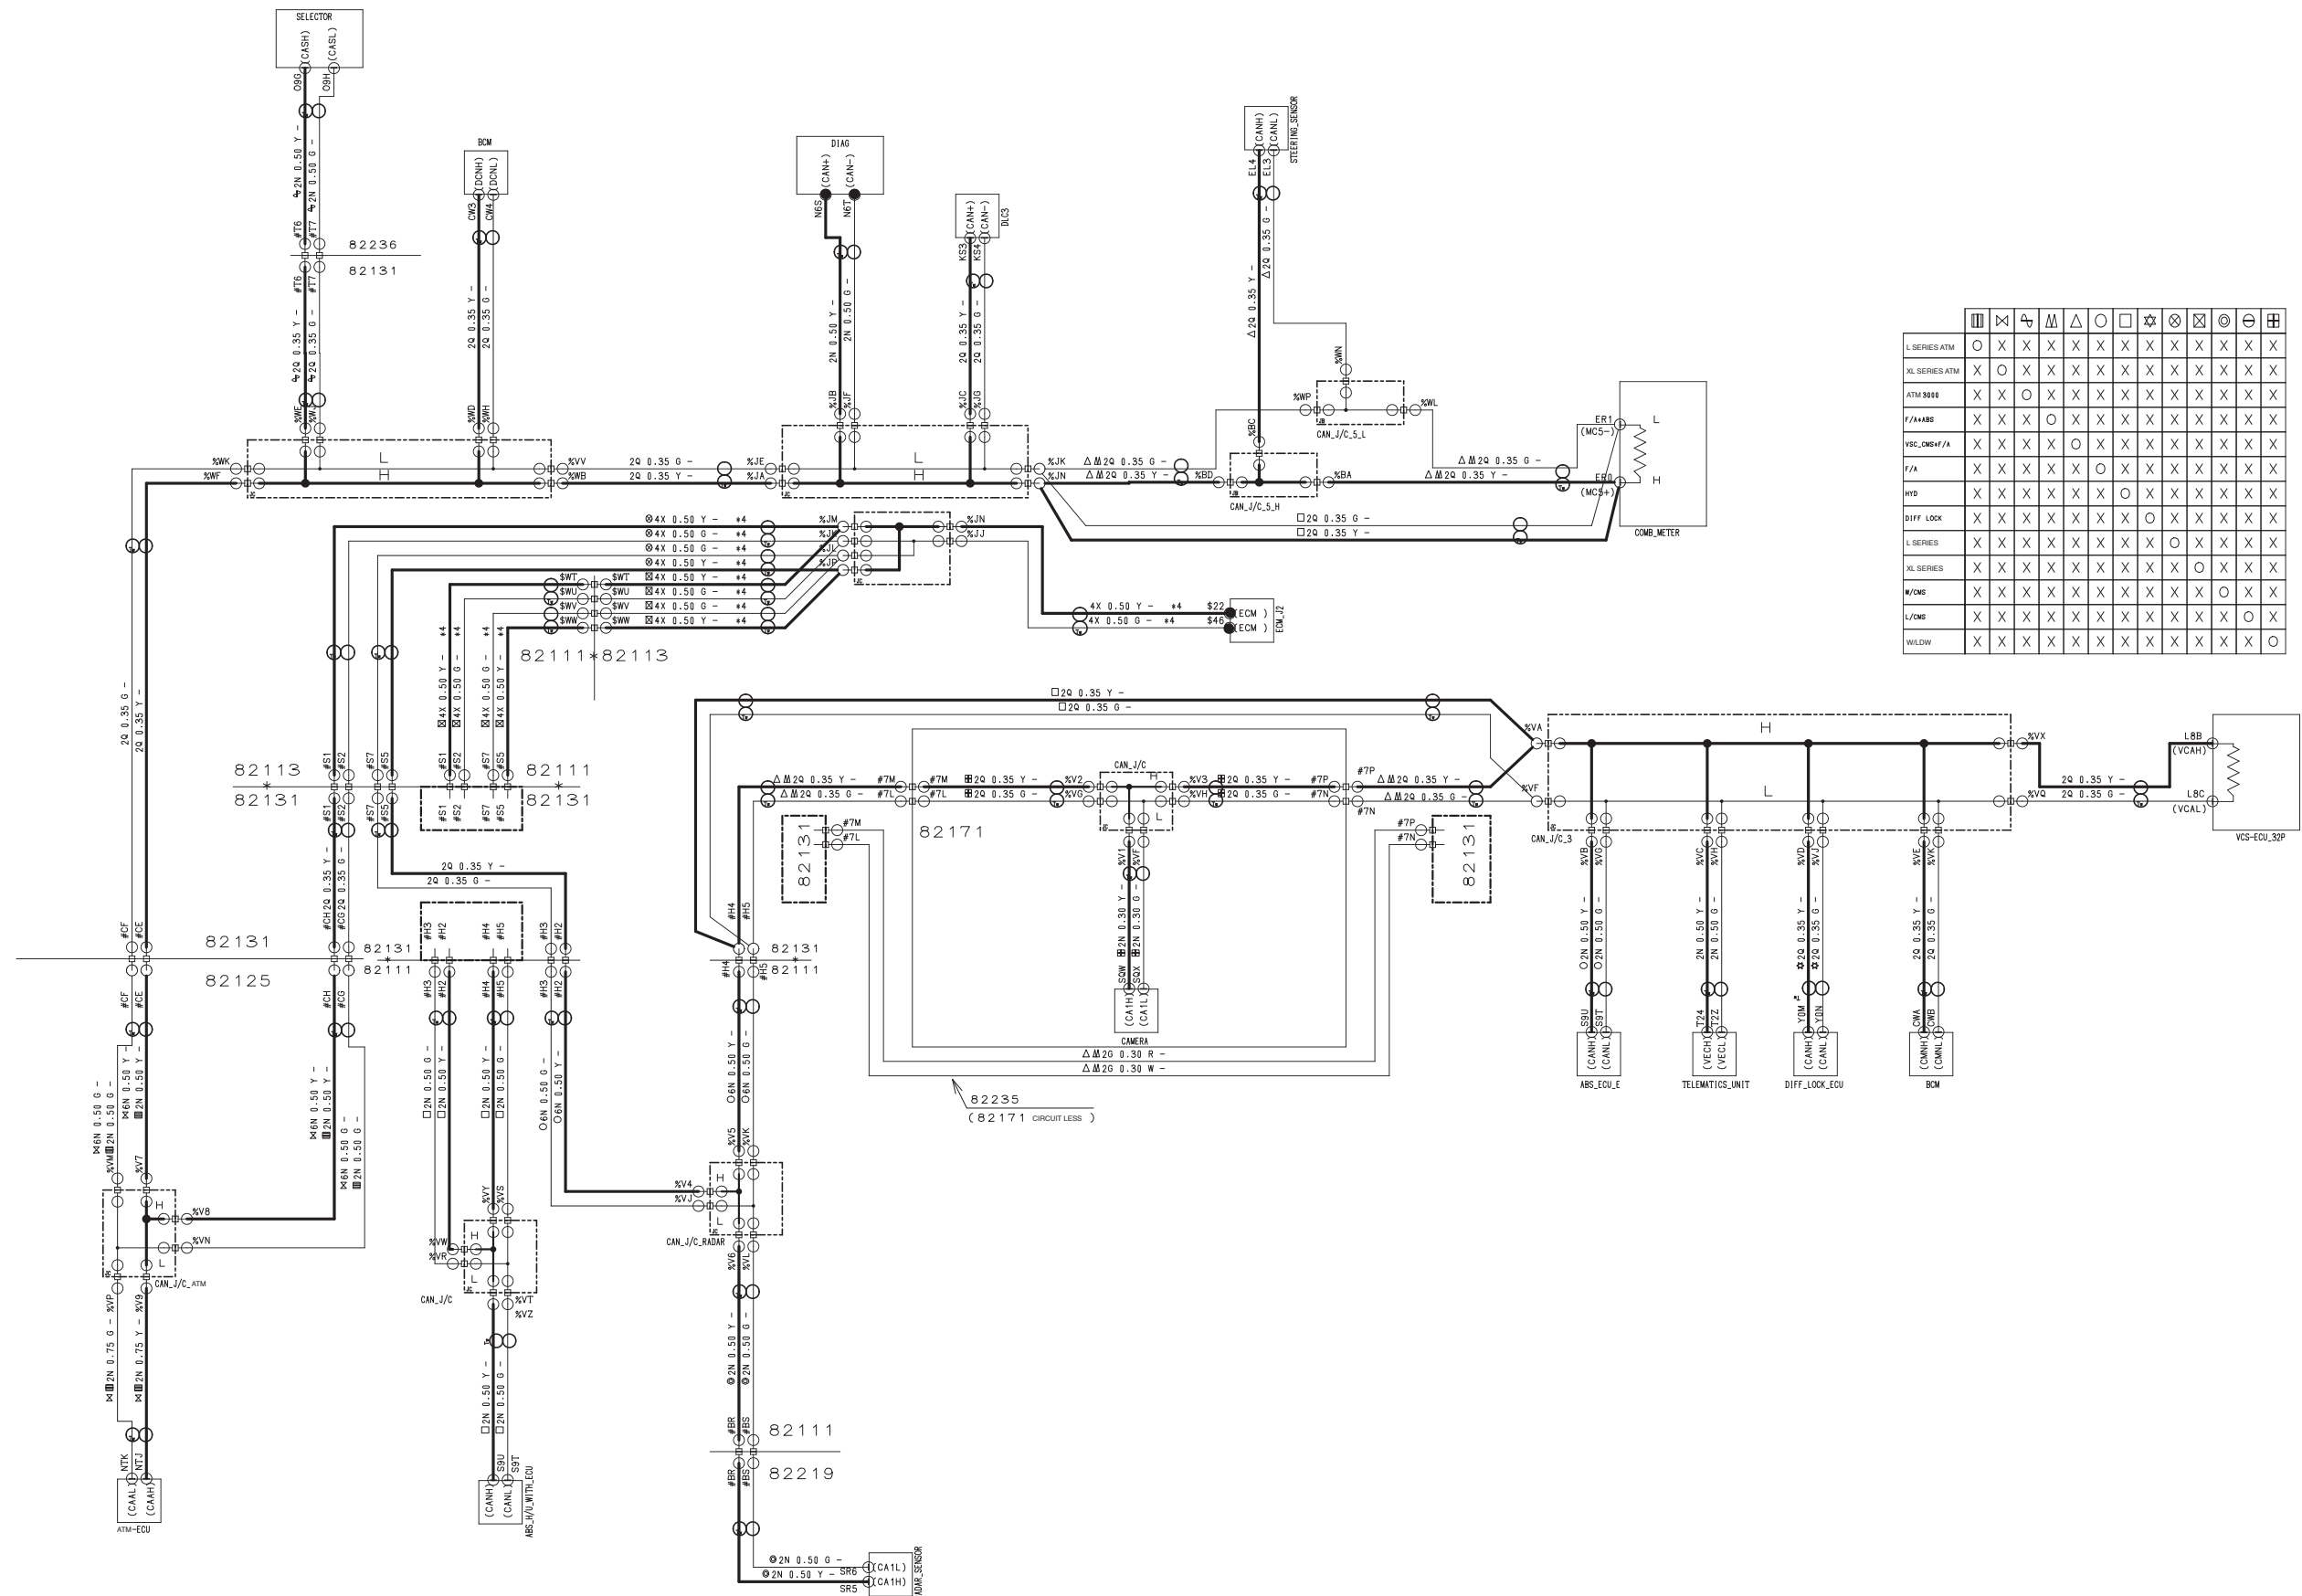
47. AIR DRIER CIRCUIT

























































































































































































## 48. AIR SUS DUMP CIRCUIT

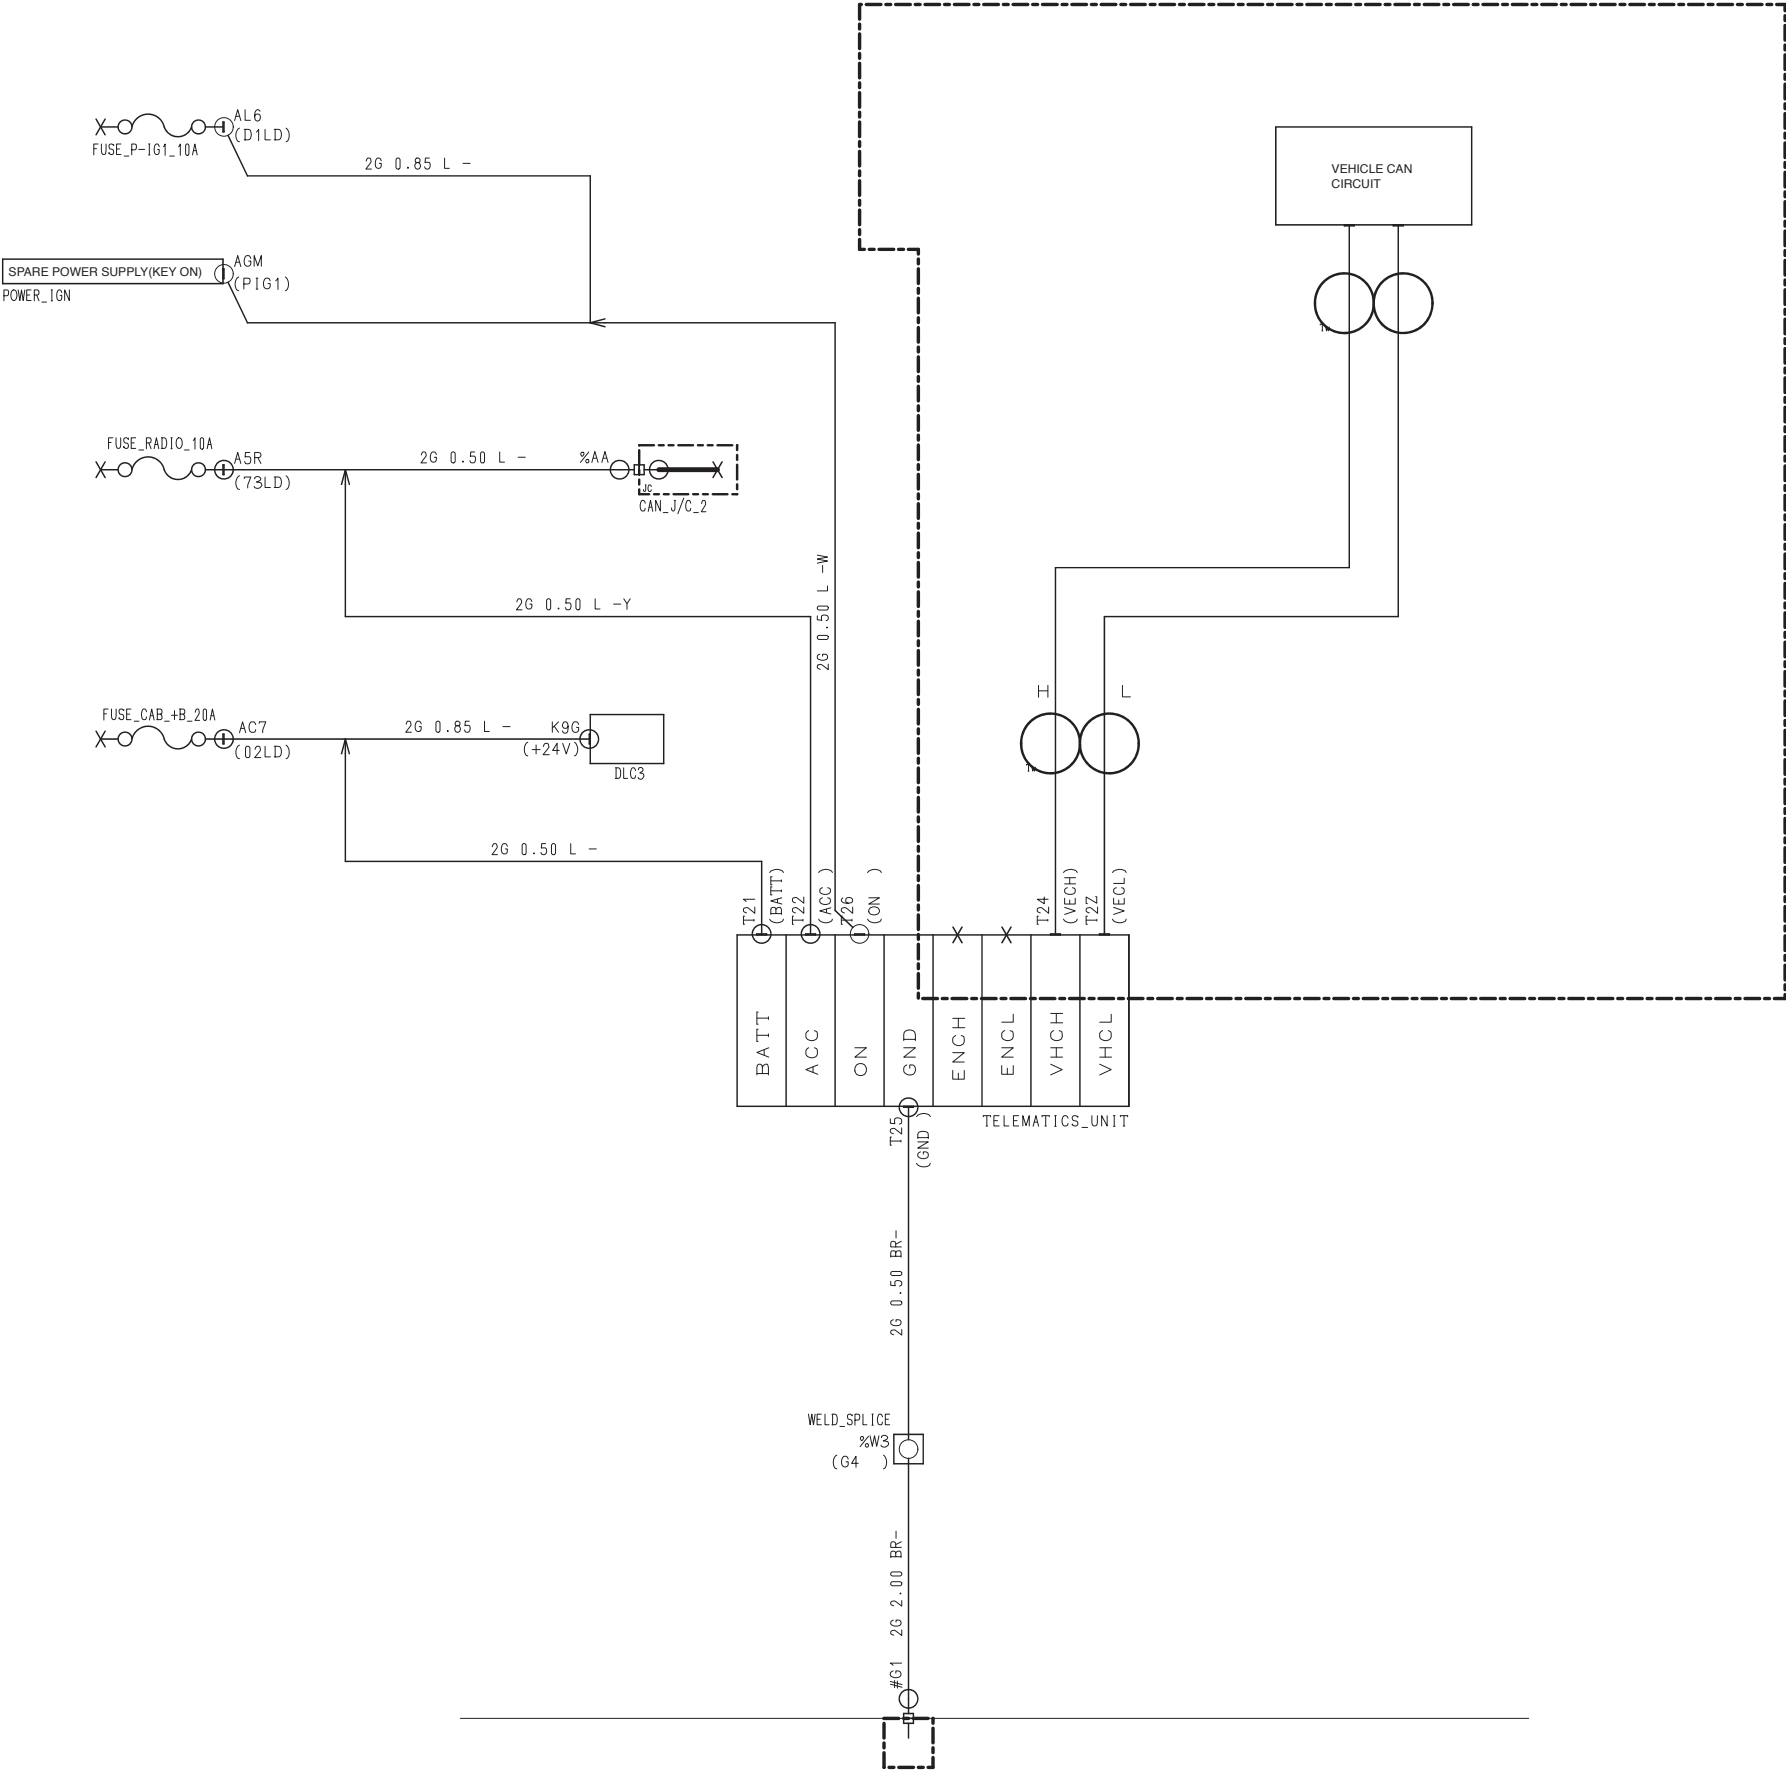


## 49. VEHICLE CAN CIRCUIT

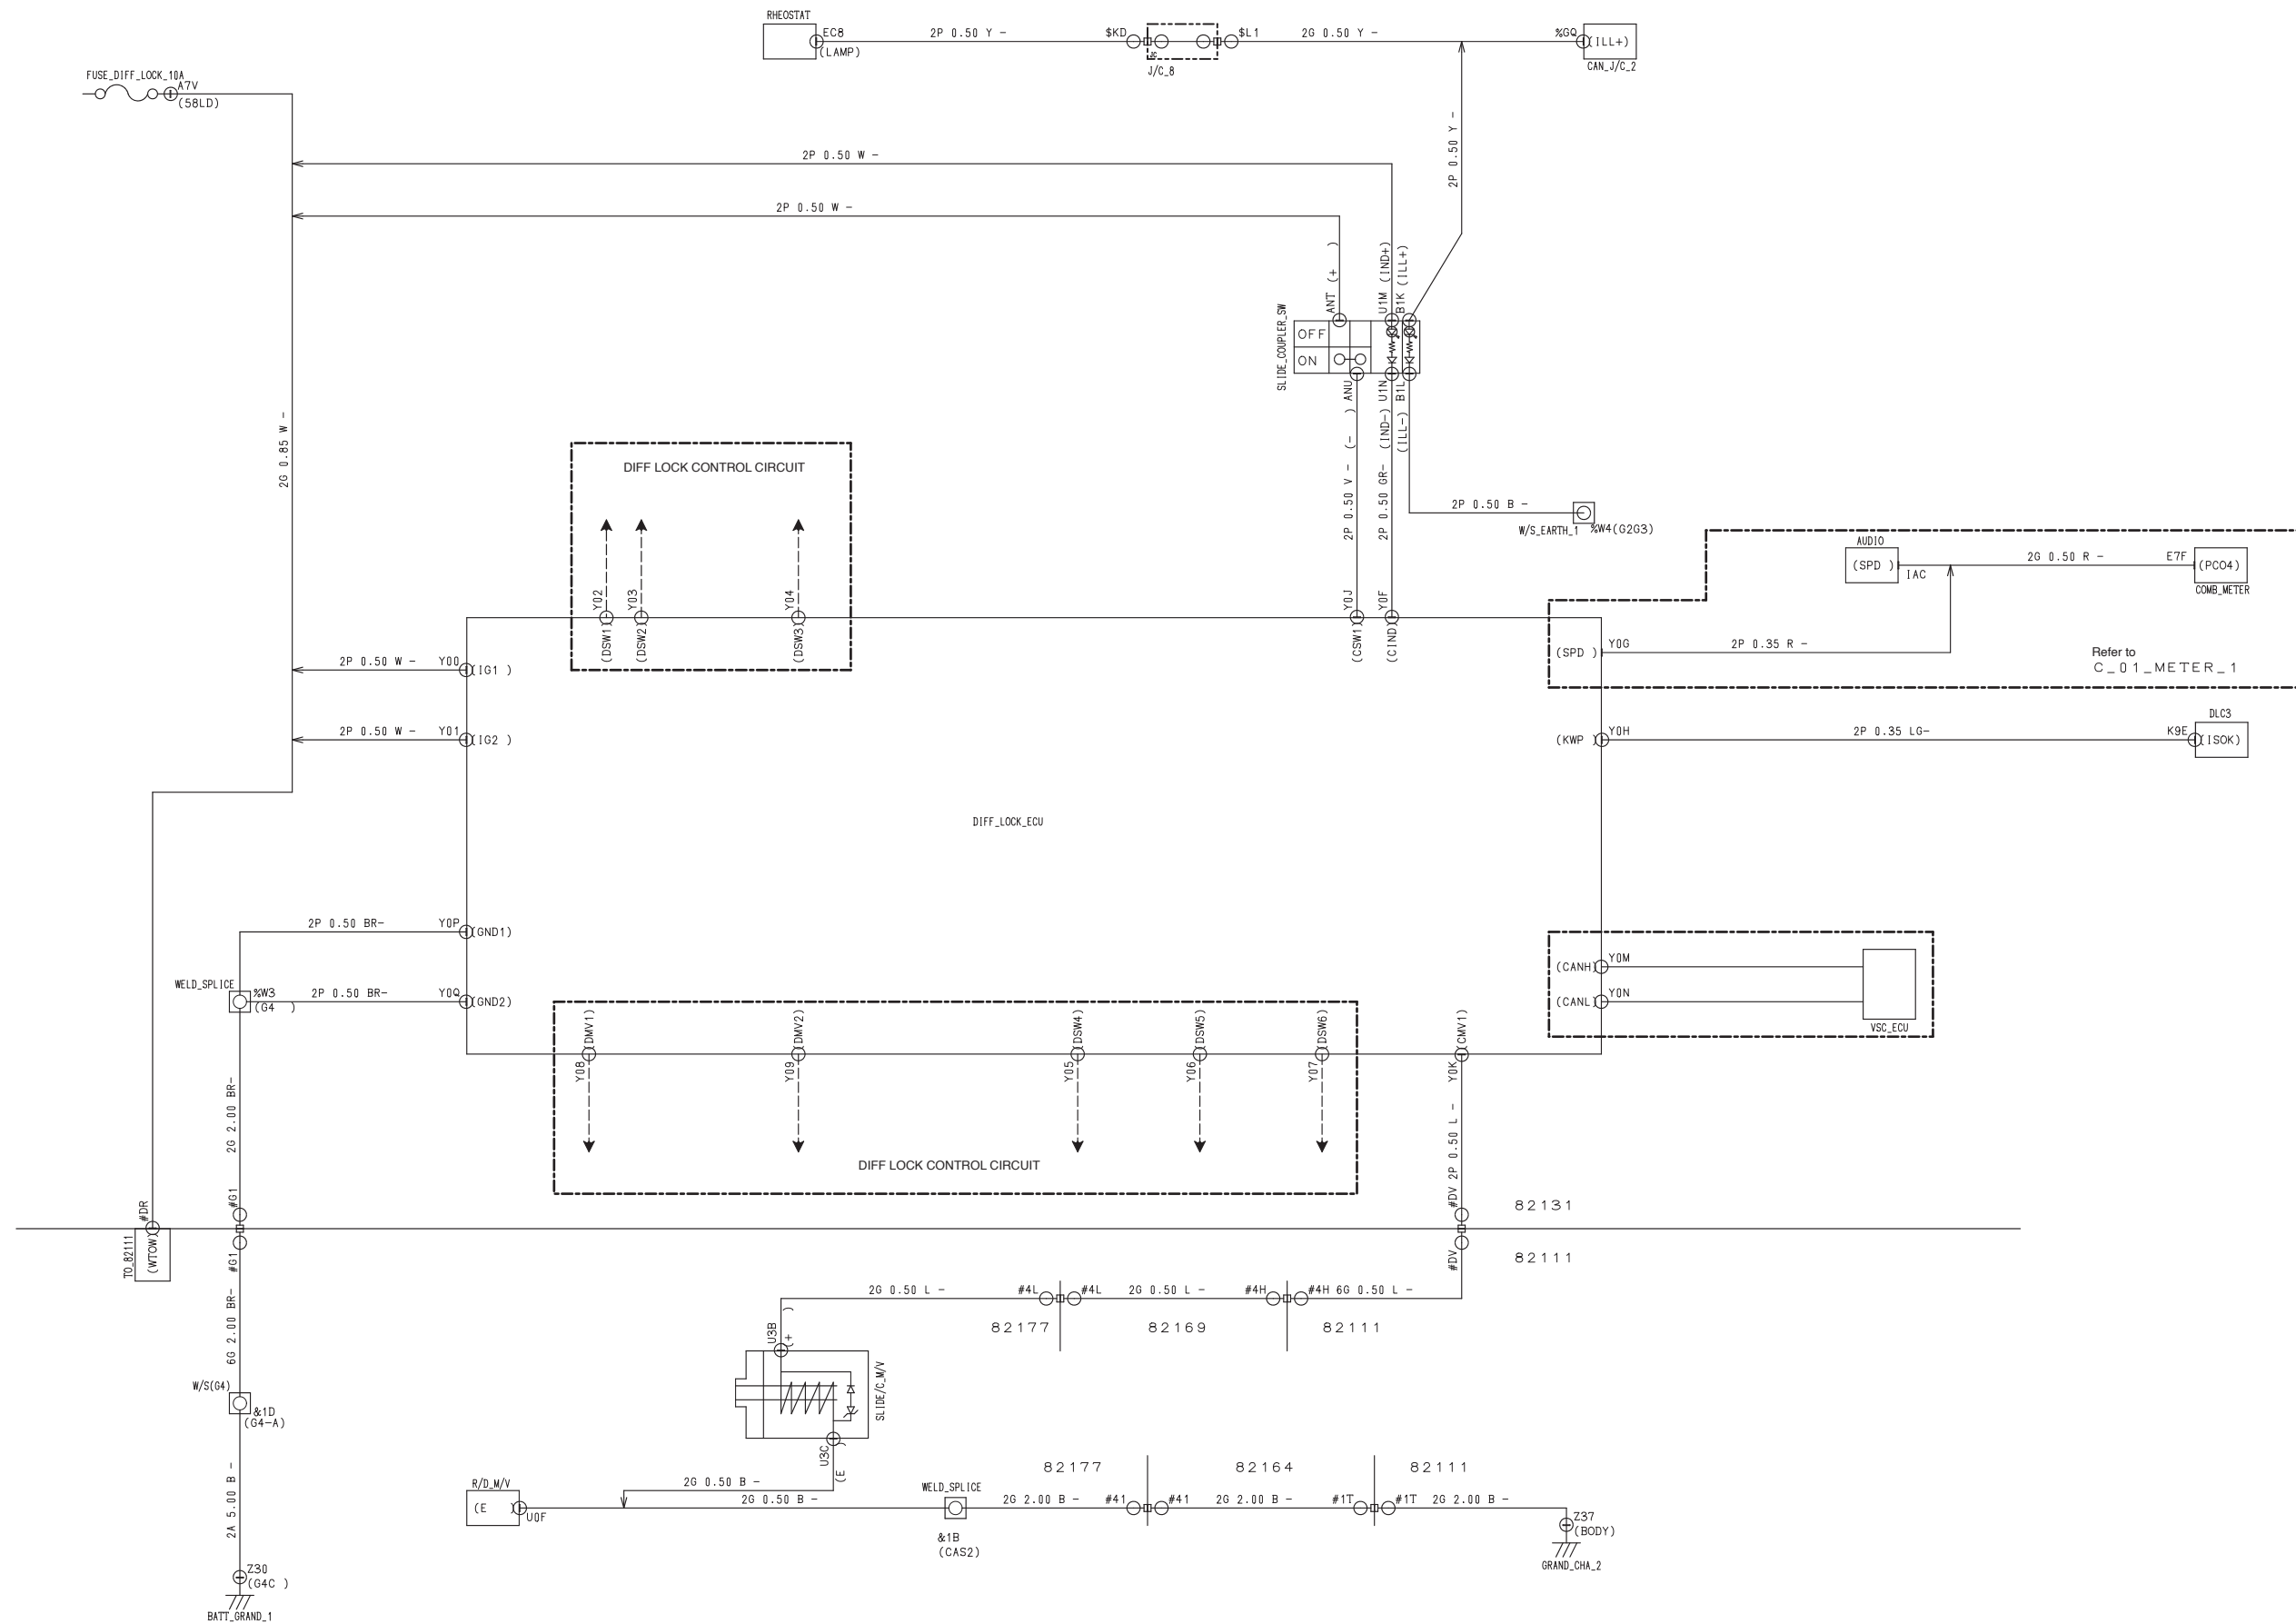


													
L SERIES ATM													
XL SERIES ATM													
ATM 3880													
F/A448S													
VSC_Om47/A													
F/A													
HYD													
DIFF LOCK													
L SERIES													
XL SERIES													
M/CMS													
L/CMS													
W/LDW													

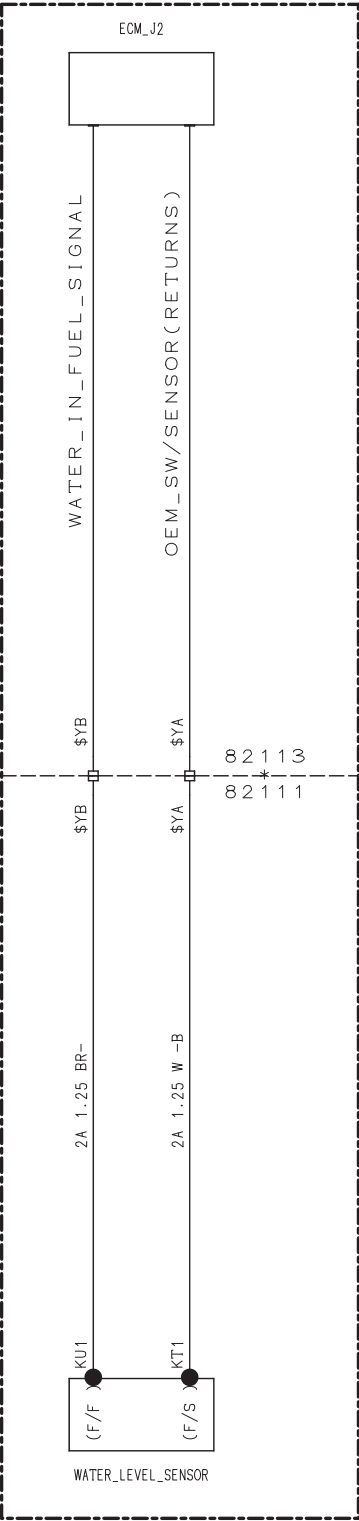
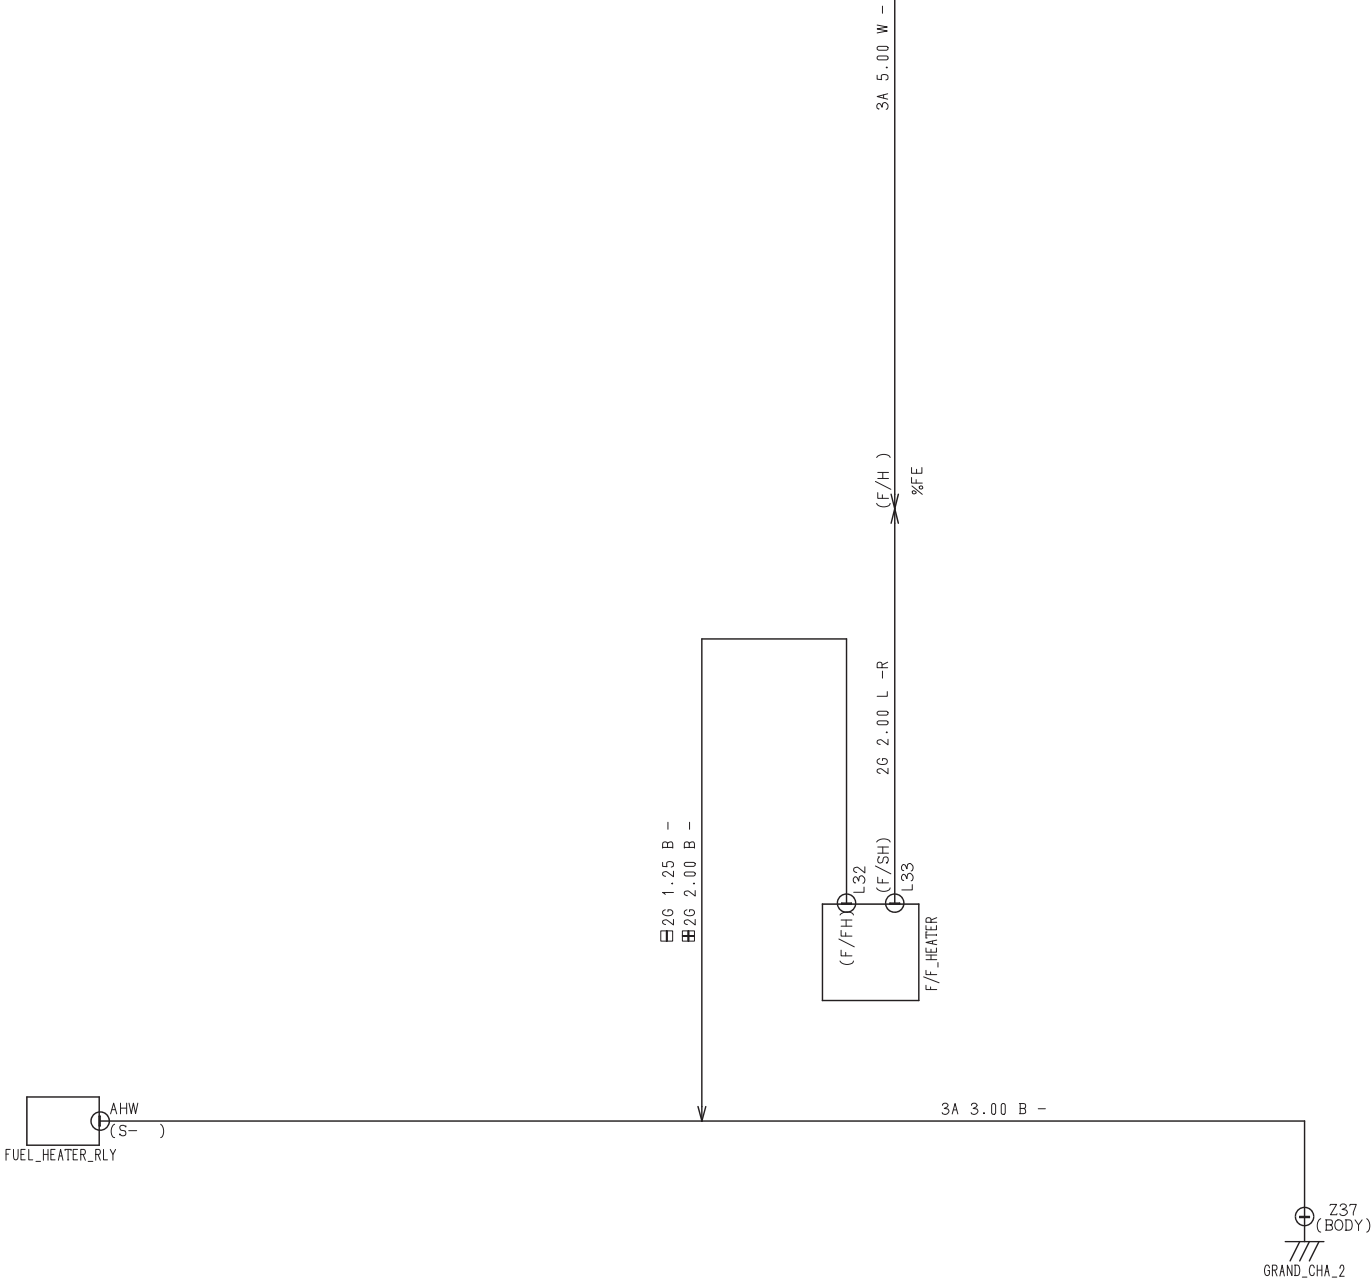

50. TELEMATICS CIRCUIT



## 51. SLIDE COUPLER LOCK CIRCUIT



52. FUEL FILTER SYSTEM CIRCUIT



L SERIES		
XL SERIES		

## 5. CONNECTORS

The Table of Connector No.

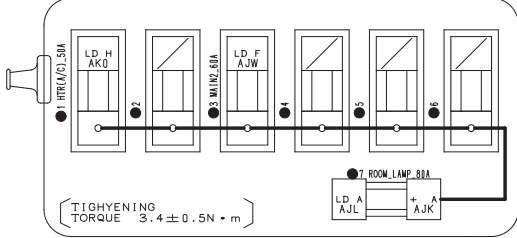




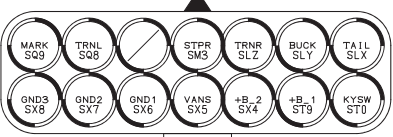






CONNECTOR No.
82111
82113
82122
82123
82124
82125
82126
82127
82128
82130
82131
82136
82142
82151
82152
82153
82161
82164
82165
82169
82171
82177
82213
82214
82235
82236
82284
82286
82287
82288
82291
82412
82422
82627
84523




















[NOTE] 1) There are all the specifications included options.






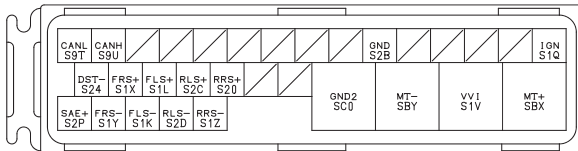





2) When you use these connectors, please understand the vehicle specifications.


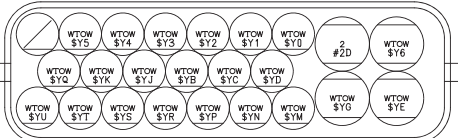


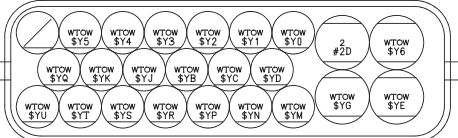


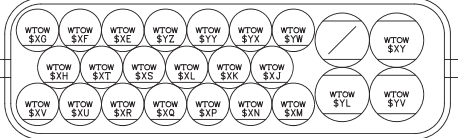
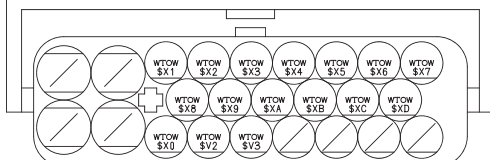
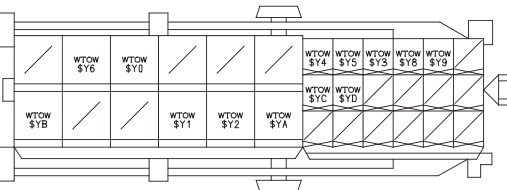
BM2246A6CAN

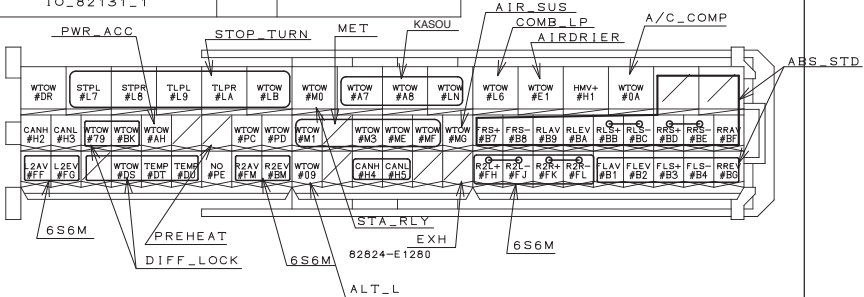

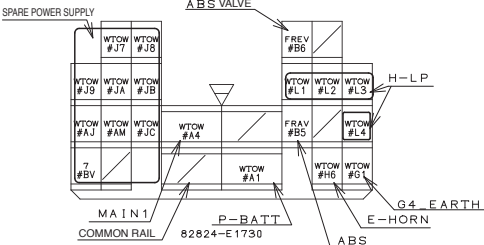
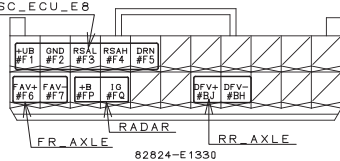

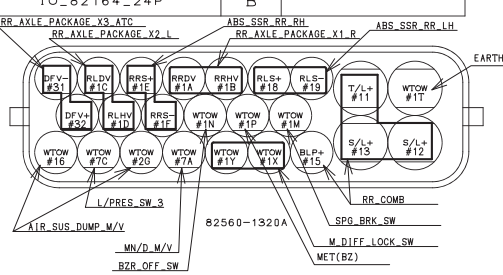




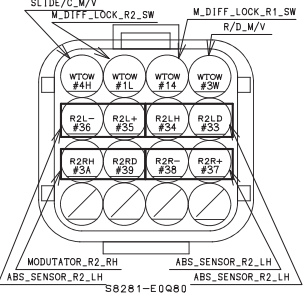
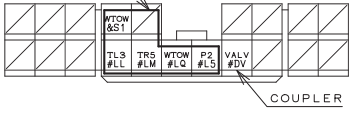

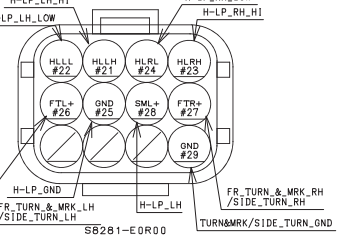


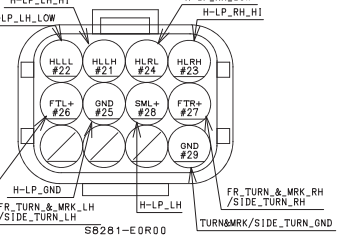


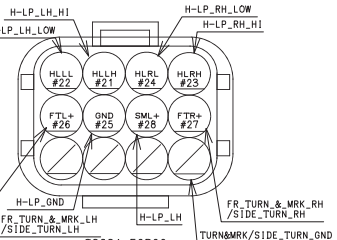



No.	PART NAME	CONN. COLOR	LOCATION	APPLI- CATION	No.	PART NAME	CONN. COLOR	LOCATION	APPLI- CATION	No.	PART NAME	CONN. COLOR	LOCATION	APPLI- CATION
2	FL_BLOCK_A	B			9	OPT_CONN_CHA	B			33	GRAND_CHA_1			XL SERIES
														XL SERIES
	*82620-E0120 30A:SZ980-58021 40A:SZ980-58028 50A:SZ980-58022 60A:SZ980-58023A 80A:SZ980-58025 82611-2010A CONNECT					S8281-E0D80  CONNECT S8281-E0D40 COLOR:B TO 9  RR HOLDER(S8284-E0310)								
3	BATTERY				10	LIGHTING_IF	B			33	GRAND_CHA_1			L SERIES
														L SERIES
5	FUEL_HEATER	DG			30	BATT_GRAND				34	GRAND_CHA_2			
														
	82560-3830A					GRAND_CHA				35	W/S_&1D			
					31									

No.	PART NAME	CONN. COLOR	LOCATION	APPLI- CATION	No.	PART NAME	CONN. COLOR	LOCATION	APPLI- CATION	No.	PART NAME	CONN. COLOR	LOCATION	APPLI- CATION
36	GRAND_CHA_3			XL SERIES	50	MOTOR_RLY	B			61	HORN_HI (-)	B		
	 82583-1810A					 82828-1160A					 82580-7590A			
37	GRAND_CHA_4			XL SERIES	51	FLOW_SW	GR			62	HORN_HI (+)	B		
	 82583-1820A					 82828-1170A					 82580-7590A			
36	GRAND_CHA_3			L SERIES	52	DIFFERENT_SW	B			63	HORN_LO (-)	B		
	 98061-0050A					 82560-2530A					 82580-7590A			
37	GRAND_CHA_4			L SERIES	53	TO_MOTOR_PUMP	B			64	HORN_LO (+)	B		
	 98061-0050A					 82580-6730B					 82580-7590A			
38	W/S_&1E				60	AIR_HORN_M/V	B			80	AMB_TEMP_SSR	GR		
	 82560-4720A					 82580-9250A					 S8281-E0650			
40	FUEL_SENDER_LH	DG				 82580-7170B-CAP COLOR(B)				90	ABS_SENSOR_FR_LH	B		
	 82560-4350A										 82560-4720A			
										91	ABS_SENSOR_FR_RH	B		
											 82560-4720A			

No.	PART NAME	CONN. COLOR	LOCATION	APPLI- CATION	No.	PART NAME	CONN. COLOR	LOCATION	APPLI- CATION	No.	PART NAME	CONN. COLOR	LOCATION	APPLI- CATION
92	ESC_ECU_E8	B			95	FRONT_AXLE_PACKAGE_ATC	B			121	AIR_DRIER(F/A)	B		
	 82560-1340A	 82824-E1640	 82560-4660A											
										156	ABS_H/U_WITH_ECU	B		
	 S8284-E0550	 S8286-E0010	 82828-1560A											
93	FR_AXLE_PACKAGE_LH	B			97	TRAILER_SOCKET	B			157	EX5B	B		
	 S8281-E0F50	 82580-6040B	 S8281-E0M70 CUMMINS:10763414											
94	FR_AXLE_PACKAGE_RH	B												
	 S8281-E0F50	 82580-6030B_CAP												

No.	PART NAME	CONN. COLOR	LOCATION	APPLI- CATION	No.	PART NAME	CONN. COLOR	LOCATION	APPLI- CATION	No.	PART NAME	CONN. COLOR	LOCATION	APPLI- CATION
158	COL_LEVEL_SENSOR	B			400	TO_82113_1	B		XL SERIES 59L(15.6GAL)	401	TO_82113_2	GR		L SERIES
	 S8281-E0T00			 82560-1320A			 82580-7750B							
159	REMOTE_ACCEL_PEDAL	B			400	TO_82113_1	B		XL SERIES 28L(7.4GAL)	402	TO_82128	B		L SERIES
	 82560-1260A			 82560-1320A			 S8281-E0R00							
160	A/C_COMPRESSOR	B			400	TO_82113_2	B		XL SERIES	402	TO_82128	B		XL SERIES 59L(15.6GAL)
	 82560-1230A			 82560-1320A			 82560-1330A							
400	TO_82113_1			L SERIES	401									
	 82824-E1260													

No.	PART NAME	CONN. COLOR	LOCATION	APPLI- CATION	No.	PART NAME	CONN. COLOR	LOCATION	APPLI- CATION	No.	PART NAME	CONN. COLOR	LOCATION	APPLI- CATION
402	TO_82128	B		XL SERIES 28L(7.4GAL)	405	TO_82131_1				408	TO_82131_4			L SERIES
	82560-1330A										82824-E1180			
403	TO_82113_3	B			406	TO_82131_2	G			409	TO_82131_5			
	82881-E0R00										82824-E1330			
404	TO_82131_6				407	TO_82131_3			XL SERIES	410	TO_82164_24P	B		
	82824-E0W50													
404					407	TO_82131_3			L SERIES	408	TO_82131_4			XL SERIES
											82824-E1180			


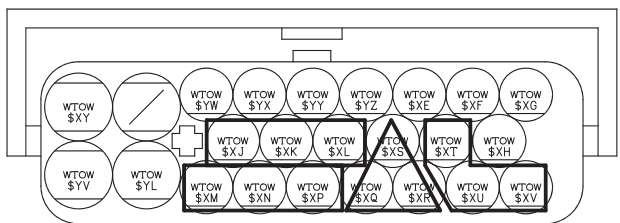
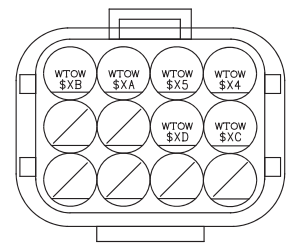
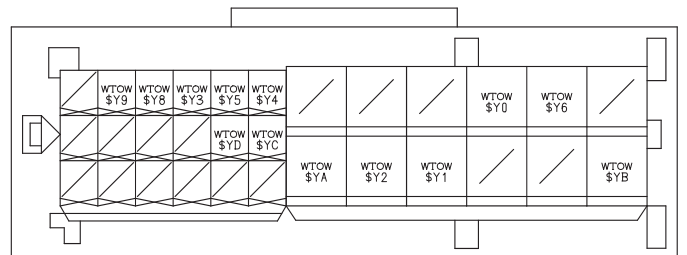
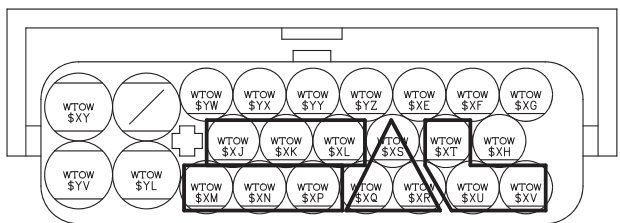
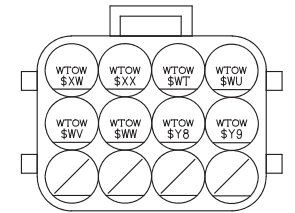
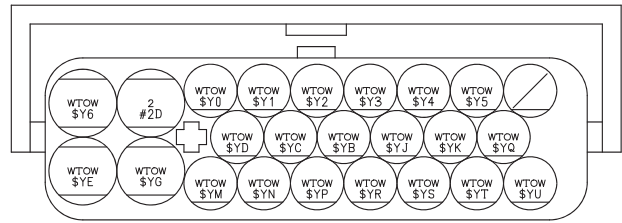

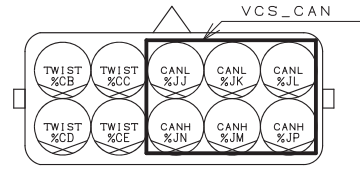
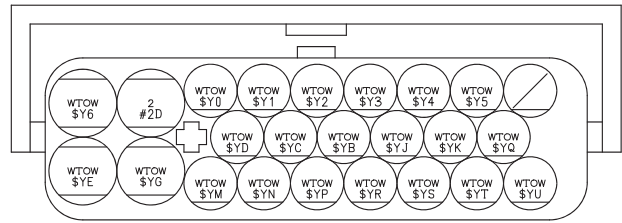

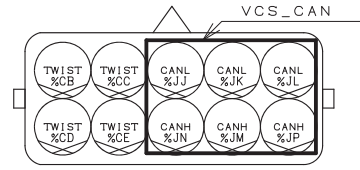
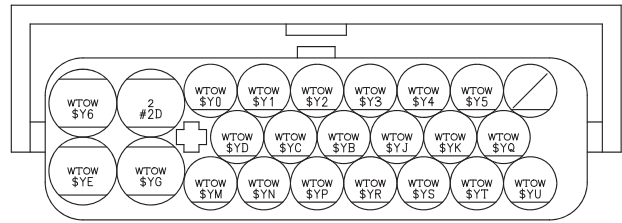
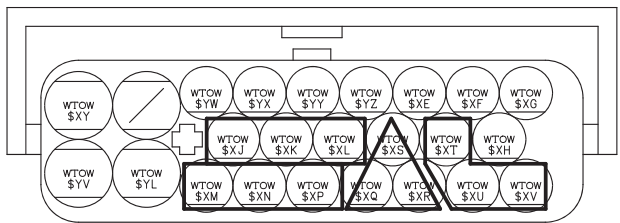
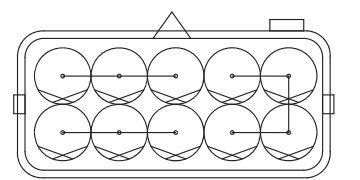
No.	PART NAME	CONN. COLOR	LOCATION	APPLI- CATION	No.	PART NAME	CONN. COLOR	LOCATION	APPLI- CATION	No.	PART NAME	CONN. COLOR	LOCATION	APPLI- CATION
411	TO_82169_16P	B			415	TO_82131_6				418	TO_82291_FR	B		
														
														
412	TO_82214	B		L SERIES	416	TO_84523	B			419	TO_82291_RR	B		
														
412	TO_82214	B		XL SERIES	417	TO_82219	B			431	TO_82130_A/C_COMP	GR		L SERIES
														
431					431					431	TO_82130	B		XL SERIES
														

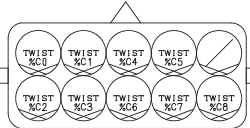
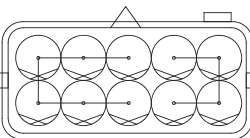






No.	PART NAME	CONN. COLOR	LOCATION	APPLI-CATION	No.	PART NAME	CONN. COLOR	LOCATION	APPLI-CATION	No.	PART NAME	CONN. COLOR	LOCATION	APPLI-CATION
440	DEF_LINE_HEATING_DIODE	B			443	DEF_TANK_HTR_DIODE	B			501	CAN_J/C_HYD	GR		
	<div><div><div><div>A</div><div>K</div></div><div>M1S</div><div>M1T</div></div><div>82560-3800A</div><div><div><div><div>1.5A</div></div><div><div></div><div></div></div></div><div>85902-1200A</div></div></div>	<div><div><div><div>A</div><div>K</div></div><div>M01</div><div>M06</div></div><div>82560-3800A</div><div><div><div><div>1.5A</div></div><div><div></div><div></div></div></div><div>85902-1200A</div></div></div>	<div><div><div><div><div></div><div></div></div><div>CANH %VW</div><div>CANL %VR</div></div><div><div><div></div><div></div></div><div>CANH %VY</div><div>CANH %VZ</div><div>CANL %VS</div><div>CANL %VT</div></div></div><div>82580-6040B</div><div><div><div><div></div><div></div></div><div></div><div></div></div><div></div><div></div></div><div>82550-1230A</div></div>											
441	DEF_PUMP_MOTOR_DIODE	B			450	WATAR_INFUEL_SSR	B			601	W/S_UREA_HTR			
	<div><div><div><div>A</div><div>K</div></div><div>M1G</div><div>M1H</div></div><div>82560-3800A</div><div><div><div><div>1.5A</div></div><div><div></div><div></div></div></div><div>85902-1200A</div></div></div>	<div><div><div><div></div><div></div></div><div>F/F KU1</div><div>F/S KT1</div></div><div>DY66-2B-PP62</div><div>S8281-E0T20</div></div> <div><div><div><div><div></div><div></div></div><div>CANH %V4</div><div>CANL %VJ</div></div><div><div><div></div><div></div></div><div>CANH %V6</div><div>CANH %V5</div><div>CANL %VK</div><div>CANL %VL</div></div></div><div>82580-6040B</div><div><div><div><div><div></div><div></div></div><div></div><div></div></div><div></div><div></div></div><div>82550-1230A</div></div></div>	<div><div><div><div></div><div></div></div><div>DEF_HTR %U0</div></div><div>SPLCE-W0001</div></div> <div><div><div><div></div><div></div></div><div>DEF_HTR %U1</div></div><div>SPLCE-W0001</div></div> <div><div><div><div></div><div></div></div><div>DEF_HTR %U2</div></div><div>SPLCE-W0001</div></div> <div><div><div><div></div><div></div></div><div>DEF_HTR %U3</div></div><div>SPLCE-W0001</div></div> <div><div><div><div></div><div></div></div><div>DEF_HTR %U4</div></div><div>SPLCE-W0001</div></div>											
442	AFTER_SSR_PWR_DIODE	B			500	CAN_J/C_RADAR	GR			602	W/S_UREA_HTR			
	<div><div><div><div>A</div><div>K</div></div><div>M0T</div><div>M0U</div></div><div>82560-3800A</div><div><div><div><div>1.5A</div></div><div><div></div><div></div></div></div><div>85902-1200A</div></div></div>	<div><div><div><div></div><div></div></div><div></div><div></div></div><div></div><div></div></div> <div>82550-1230A</div>												

No.				APPLI- CATION
	PART NAME	CONN. COLOR	LOCATION	
606	W/S			
	<div><div>ENG_E</div><div>%U5</div></div> <div>SPLCE-W0001</div>			
607	W/S			
	<div><div>ENG_B</div><div>%U6</div></div> <div>SPLCE-W0001</div>			
608	W/S			
	<div><div>B</div><div>%U7</div></div> <div>SPLCE-W0001</div>			



No.	PART NAME	CONN. COLOR	LOCATION	APPLI- CATION
1	ECM_J2	B		
	<p>S8281-E0T50 CUMMINS:13864572</p>			
2	EX5B	B		
	<p>S8281-E0M70 CUMMINS:10763414</p>			
3	CC1D	GR		
	<p>S8281-E0T10 CUMMINS:13533441</p>			
4	COL_LEVEL_SENSOR	B		
	<p>S8281-E0T00 DELPHI:12110293</p>			
5	REMOTE_ACCEL_PEDAL	B		
	<p>82560-1260A</p>			
36	TO_82131_48P			

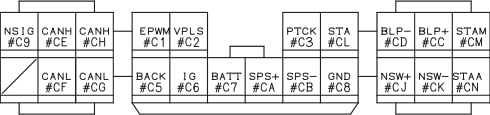

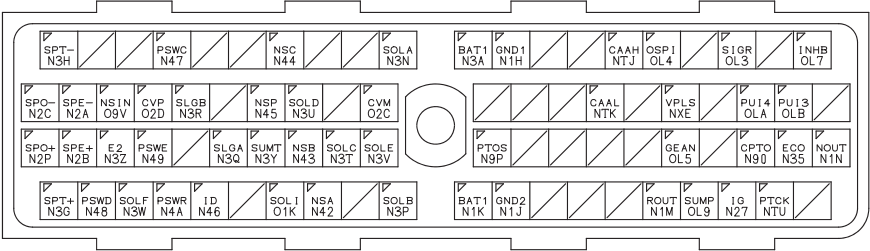

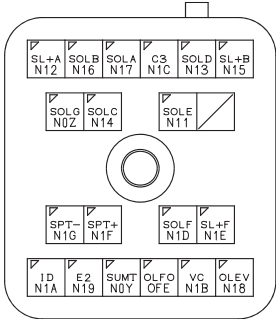


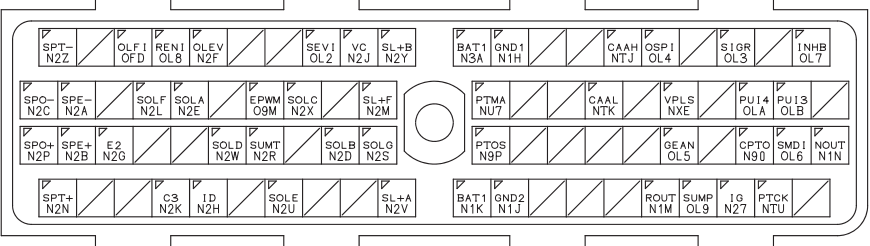


No.	PART NAME	CONN. COLOR	LOCATION	APPLI- CATION	No.	PART NAME	CONN. COLOR	LOCATION	APPLI- CATION	No.	PART NAME	CONN. COLOR	LOCATION	APPLI- CATION
51	STA_C				401	TO_82111_2	B		XL SERIES 59L(15.6GAL)	402	TO_82128	B		
														
400	TO_82111_1			L SERIES	401	82560-1330A				403	TO_82111_3	B		
														
400	TO_82111_1	B		XL SERIES	401	TO_82111_2	GR		L SERIES	500	J/C_1	B		
														
400	TO_82111_1				401	TO_82111_2	B		XL SERIES 28L(7.4GAL)					
														
400	TO_82111_1				401	82560-1330A								
														

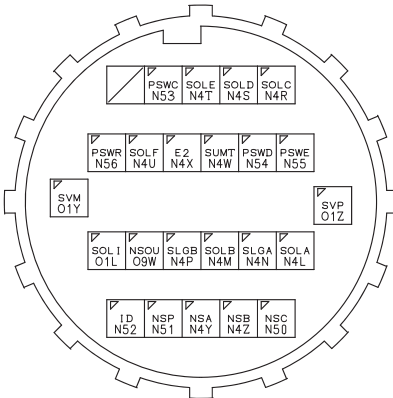

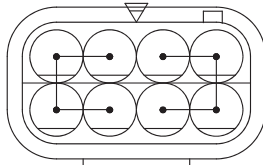
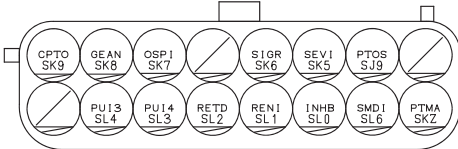
No.	PART NAME		CONN. COLOR	LOCATION	APPLI- CATION	No.	PART NAME		CONN. COLOR	LOCATION	APPLI- CATION
	J/C_2		B				W/S				
501	<div> S8281-E0E80</div> <div> S8281-E0F00 COLOR(GR)</div>					606	<div> SPLCE-W0001</div>				
601	W/S					<div> SPLCE-W0001</div>					
602	W/S					<div> SPLCE-W0001</div>					
603	W/S					<div> SPLCE-W0001</div>					
604	W/S					<div> SPLCE-W0001</div>					
605	W/S					<div> SPLCE-W0001</div>					

No.				APPLI- CATION
	PART NAME	CONN. COLOR	LOCATION	
1	STARTER 1			
	<div><div><div>12</div><div># B A3X</div></div><div>*82675-E0540</div></div>			
2	BATTERY			L SERIES
	<div><div><div>10</div><div># +(1) A4B</div></div><div>82675-E0450</div></div>			XL SERIES_ 59L(15.6GAL)
2	BATTERY			XL SERIES
	<div><div><div>10</div><div># +(1) A4B</div></div><div>*82583-1780A</div></div>			28L(7.4GAL)

No.			APPLI- CATION
	PART NAME	CONN. COLOR	
1	BATTERY1		
	<div><div><div>10</div><div># +(1) A4B</div></div><div></div><div>*82583-1780A</div></div>		
2	BATTERY2		
	<div><div><div>10</div><div># +(2) A4A</div></div><div></div><div>*82583-1780A</div></div>		
2	BATTERY3		LOCAL
	<div><div><div>10</div><div># +(3) A4D</div></div><div></div><div>*82583-1780A</div></div>		

No.				APPLI- CATION
	PART NAME	CONN. COLOR	LOCATION	
1	BATTERY 1			
	<div><div><div><div>10</div></div><div><div>#</div><div>-(1)</div><div>A49</div></div></div><div></div><div>*82583-1780A</div></div>			
2	BATTERY_GND			
	<div><div><div><div>10</div></div><div><div>#</div><div>G4P</div><div>Z29</div></div></div><div></div><div>82675-E0200</div></div>			



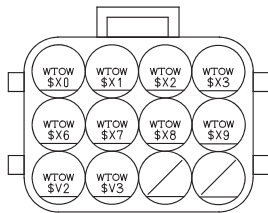

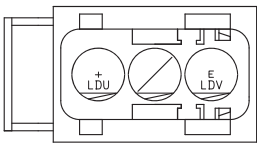
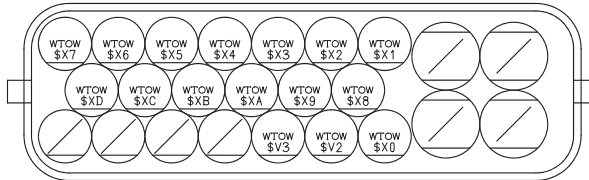




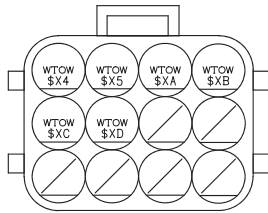


No.	PART NAME	CONN. COLOR	LOCATION	APPLI- CATION	No.	PART NAME	CONN. COLOR	LOCATION	APPLI- CATION	No.	PART NAME	CONN. COLOR	LOCATION	APPLI- CATION
1	TO_82131_22P				8	OUTPUT_SPEED_SENS	B			10	ALLISON_ECU	B		ALLISON 2200 / 2500
	 82580-9990A					 S8281-E0V10					 82828-1570A			
6	EG_SPEED_SENS_3(HS)	B			9	MAIN_TRANS(ATM3000)	B			16	ENG_SPEED_SENS	B		
	 82828-1610A					 82828-1580A					 82828-1610A			
7	EG_SPEED_SENS_3(RDS)	B			10	ALLISON_ECU	B		ALLISON 3000 / 3500	17	TB_SPEED_SENS	B		
	 82828-1610A					 82828-1570A					 82828-1610A			
					18						OP_SPEED_SENS	B		
											 S8281-E0V10			


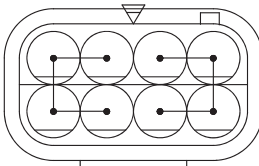
No.	PART NAME		CONN. COLOR	LOCATION	APPLI- CATION	No.	PART NAME		CONN. COLOR	LOCATION	APPLI- CATION	
	MAIN_TRANS(ATM2000)		B				CAN_J/C_ATM		GR			
19						30						
	82828-1590A						82580-6040B					
												
						82550-1230A						
25	ALLISON_TM_IF		GR									
	CONNECT S8281-E0M30 COLOR:GR TO 25		S8281-E0M20									














No.				APPLI- CATION
	PART NAME	CONN. COLOR	LOCATION	
1	JUMP_STUD_POS			XL SERIES
	<div><div><div>10</div><div># +S J A44</div></div><div></div><div>*82583-1780A</div></div>			
1	JUMP_STUD_POS			L SERIES
	<div><div><div>10</div><div># +S J A44</div></div><div></div><div>82583-1850A</div></div>			
2	BATTERY2_(+)			
	<div><div><div>10</div><div># +(2) A4A</div></div><div></div><div>*82583-1780A</div></div>			

No.				APPLI- CATION
	PART NAME	CONN. COLOR	LOCATION	
1	JUMP_STUD_NEG			XL SERIES
	<div><div><div>10</div><div># -SJ A45</div></div><div></div><div>*82583-1780A</div></div>			
1	JUMP_STUD_NEG			L SERIES
	<div><div><div>10</div><div># -SJ A45</div></div><div></div><div>82675-E0530</div></div>			
2	BATTERY2_(-)			
	<div><div><div>10</div><div># -(2) A4B</div></div><div></div><div>*82583-1780A</div></div>			

No.	PART NAME	CONN. COLOR	LOCATION	APPLI- CATION	No.	PART NAME	CONN. COLOR	LOCATION	APPLI- CATION	No.	PART NAME	CONN. COLOR	LOCATION	APPLI- CATION
1	UREA_HTR_PL	B			4	SUPPLY_MODULE	B			401	TO_82111	B		L SERIES
	 82560-4720A					 S8281-E0F40					 S8281-E0R10			
2	UREA_HTR_SL	B		XL SERIES	5	W/C_CONTROL_M/V	B			401	TO_82111	B		XL SERIES
	 82560-4730A			L SERIES_28L(7.4GAL)		 82824-E1620					 82560-1320A			
2	UREA_HTR_SL	B		L SERIES 59L(15.6GAL)	6	UREA_SENSOR	B			401				
	 82560-4720A					 S8281-E0M00								
3	UREA_HTR_RL	B		XL SERIES	30	CAN_TMN1	B			402	TO_82113	B		
	 82560-4720A			L SERIES_28L(7.4GAL)		 82560-2700A					 S8281-E0R10			
3	UREA_HTR_RL	B		L SERIES 59L(15.6GAL)										
	 82560-4730A					 89613-1020A								

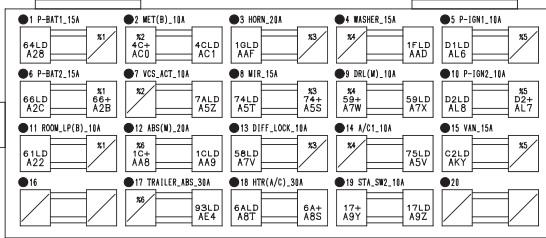
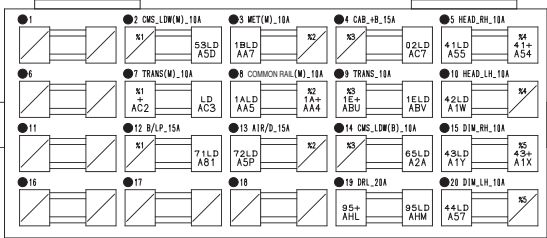
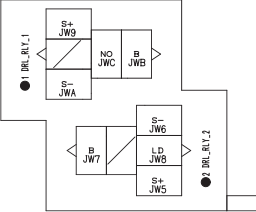
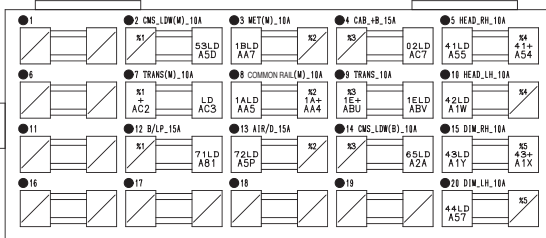
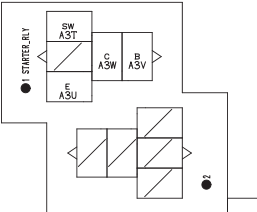
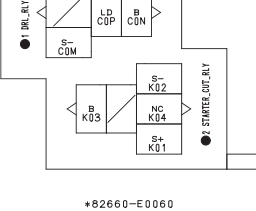
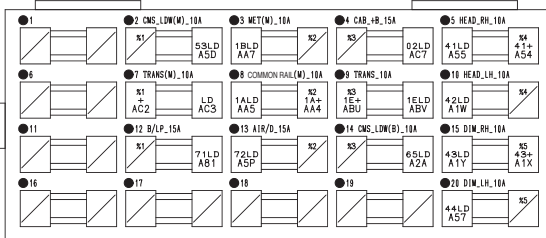
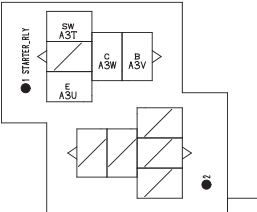
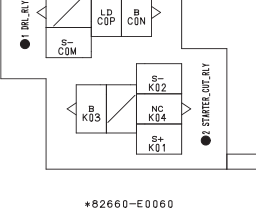
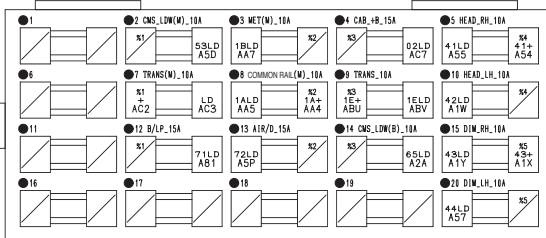
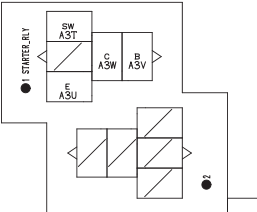
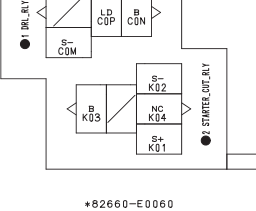
No.			APPLI- CATION
	PART NAME	CONN. COLOR	
500	J/C_LOCAL_CAN	GR	
	<div><p>82580-6040B</p><p>82550-1230A</p></div>		

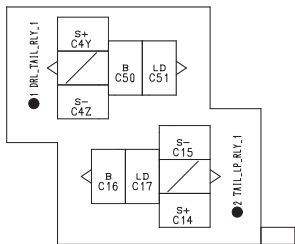
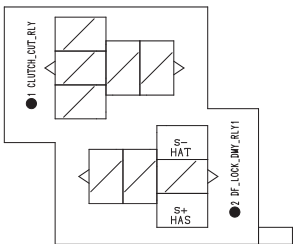
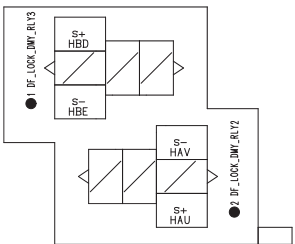
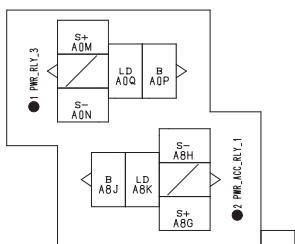
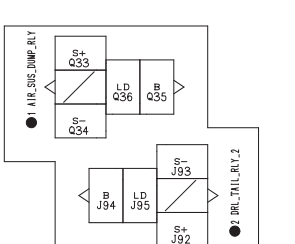
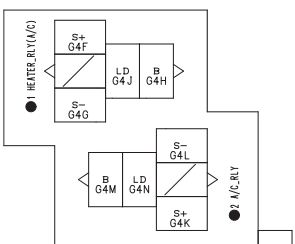
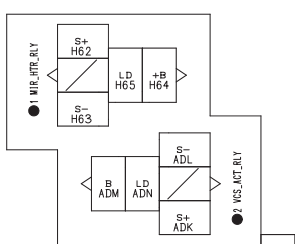
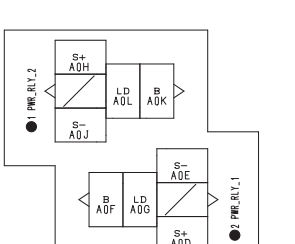
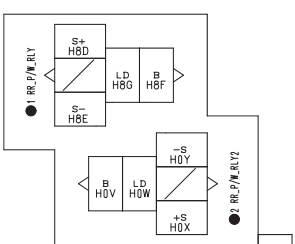
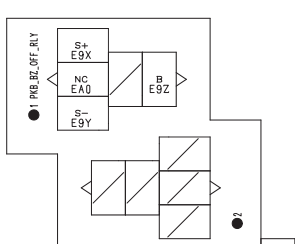
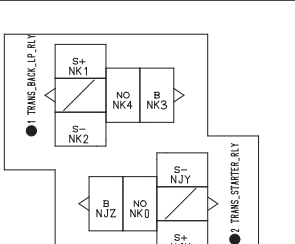
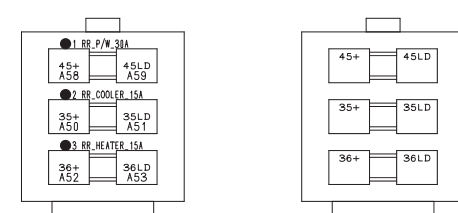
No.	PART NAME	CONN. COLOR	LOCATION	APPLI- CATION	No.	PART NAME	CONN. COLOR	LOCATION	APPLI- CATION
1	TO_82111	B		SAE-E&B (ONLY CONNECT)	2	STA_C			L SERIES
	 82580-6030B	 99141-12005							
1	MOTOR_PUMP			HYDRAULIC BRAKE	3	ALT_L	B		
	 98060-5050A	 S8281-E0S60							
1	A/C_COMPRESSOR	B		L SERIES	4	TO_82111_A/C_COMP	GR		L SERIES
	 82560-1230A	 82580-9460A							
2	TRAILER_SOCKET	B		SAE-E&B (ONLY CONNECT)	4	TO_82111	B		XL SERIES
	 82580-6040B	 *82560-3870A							
2	TO_FR/H	B		HYDRAULIC BRAKE	5	ALT_L			
	 82580-6720B  82586-1060A	 99141-12005							

No.	PART NAME	CONN. COLOR	LOCATION	APPLI-CATION	No.	PART NAME	CONN. COLOR	LOCATION	APPLI-CATION	No.	PART NAME	CONN. COLOR	LOCATION	APPLI-CATION
	FUSE 1	B		L SERIES		FUSE 1	B		XL SERIES		FUSE 2	B		L SERIES
1	<div><div><div><div><div>1 DRL_TAIL_LP_10A</div><div>54LD A5F</div><div>51 54+ A5E</div></div><div><div>2 STARTER_10A</div><div>16+ A15</div><div>16LD A16</div></div><div><div>3 DOOR_LOCK_20A</div><div>92LD AE2</div><div>32</div></div><div><div>4 STOP_20A</div><div>33</div><div>14LD A12</div></div><div><div>5 LAMP1_10A</div><div>12LD A0Y</div><div>34</div></div></div><div><div>6 P-TAIL1_15A</div><div>52LD A5B</div><div>31</div></div><div><div>7 ABS(B)_30A</div><div>91+ ADZ</div><div>91LD AE0</div></div><div><div>8 WIPER(B)_30A</div><div>1HLD ABX</div><div>32 13+ ABW</div></div><div><div>9 TURN_20A</div><div>33 11+ A0V</div><div>11LD A0W</div></div><div><div>10 STA_SW_10A</div><div>10LD A9X</div><div>34 10+ A9W</div></div></div><div><div>11 TRAILER_TAIL_15A</div><div>96LD AHP</div><div>36 96+ AHN</div></div><div><div>12 STA_C_10A</div><div>35</div><div>107L AAX</div></div><div><div>13 P/W_30A</div><div>32</div><div>107L AAX</div></div><div><div>14 TURN_STOP_10A</div><div>33</div><div>34LD A1L</div></div><div><div>15 RADIO_10A</div><div>73LD A5R</div><div>37</div></div></div> <div><div>16 P-TRAILER_15A</div><div>97LD AHS</div><div>36</div></div> <div><div>17</div><div></div><div></div></div> <div><div>18 TAIL_LP_15A</div><div>51LD A20</div><div>51+ A1Z</div></div> <div><div>19 T_TURN_20A</div><div>94+ AG3</div><div>94LD AG4</div></div> <div><div>20 CIG_15A</div><div>56LD A5K</div><div>37 56+ A5J</div></div>													

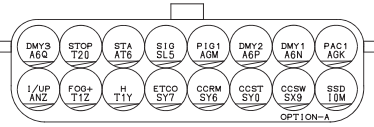







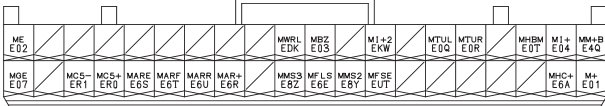


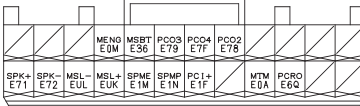


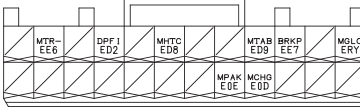

\*82610-E0090



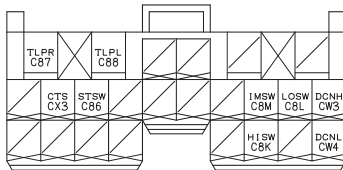



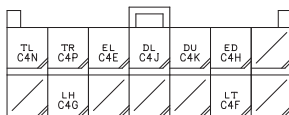
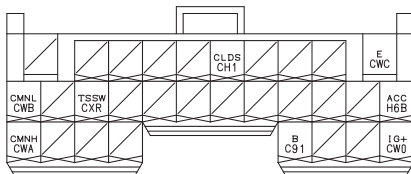

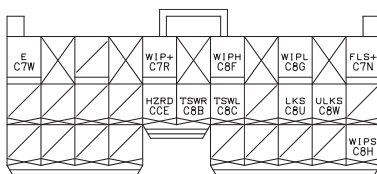




10A:SZ980-57051 15A:SZ980-57052 20A:SZ980-57053 30A:SZ980-57058


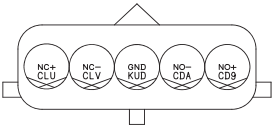



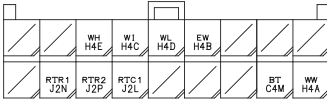

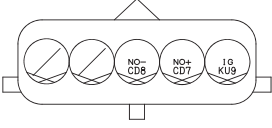







No.	PART NAME	CONN. COLOR	LOCATION	APPLI- CATION	No.	PART NAME	CONN. COLOR	LOCATION	APPLI- CATION	No.	PART NAME	CONN. COLOR	LOCATION	APPLI- CATION
2	FUSE2	B		XL SERIES	3	FUSE3	B		L SERIES	7	CASSET_RLY	B		
														
3	FUSE3	B		XL SERIES	4	CASSET_RLY	B			8	CASSET_RLY	B		
														
3	FUSE3	B		XL SERIES	5	CASSET_RLY	B			10	CASSET_RLY	B		
														
	FUSE3	B		XL SERIES		CASSET_RLY	B			11	CASSET_RLY	B		
														


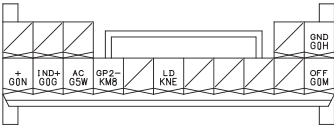














No.	PART NAME	CONN. COLOR	LOCATION	APPLI- CATION	No.	PART NAME	CONN. COLOR	LOCATION	APPLI- CATION	No.	PART NAME	CONN. COLOR	LOCATION	APPLI- CATION
12	CASSET_RLY	B			15	CASSET_RLY	B		XL SERIES	19	CASSET_RLY	B		
														
13	CASSET_RLY	B			16	CASSET_RLY	B			20	CASSET_RLY	B		
														
14	CASSET_RLY	B			17	CASSET_RLY	B			21	CASSET_RLY	B		
														
15	CASSET_RLY	B		L SERIES	18	CASSET_RLY	B			23	CASSET_FUSE	B		
														

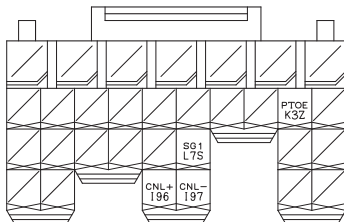
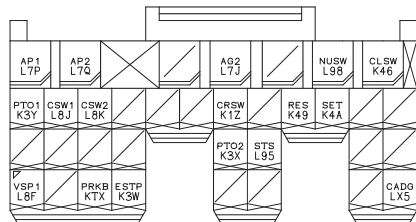

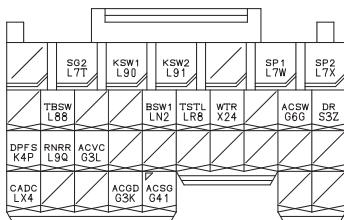
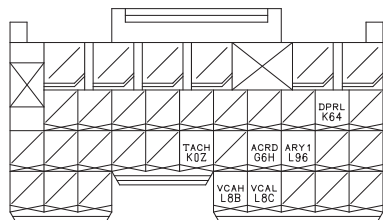








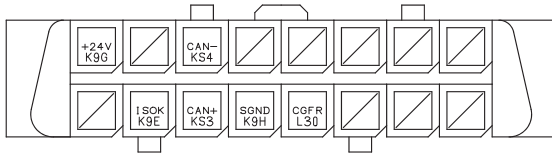


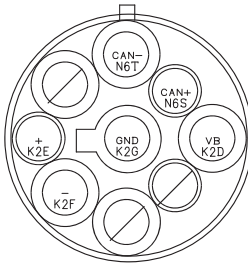








No.	PART NAME	CONN. COLOR	LOCATION	APPLI- CATION	No.	PART NAME	CONN. COLOR	LOCATION	APPLI- CATION	No.	PART NAME	CONN. COLOR	LOCATION	APPLI- CATION
25	BODY_BUILDER_IF	B			52	GRAND_AUDIO				58	W/S_EARTH_4			
	 S8281-E0N00					 82583-1670A					 SPLCE-00001			
26	OPT_CONN_CAB	GR			53	GRAND_DR1				59	W/S_EARTH_5			
	 S8281-E0M60					 82583-1670A					 SPLCE-00001			
27	STARTER_SW				54	GRAND_DR2				80	COMB_METER_40P	B		
	 82560-3630A					 82583-1640A					 82824-E0P30			
28	WORKING_LAMP_SW	L		WORKLAMP (CAB BACK)	55	W/S_EARTH_1				81	COMB_METER_24P_A	B		
	 82824-E0U10					 SPLCE-00001					 82824-E0P40			
28	VAN_LAMP_SW	L		REAR BODY ROOMLAMP	56	W/S_EARTH_2				82	COMB_METER_24P_B			
	 82824-E0U10					 SPLCE-00001					 82824-E0P40			
28					57	W/S_EARTH_3								
						 SPLCE-00001								

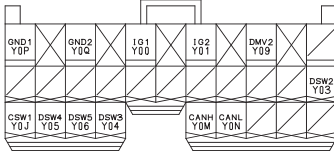


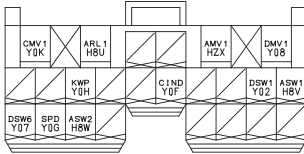





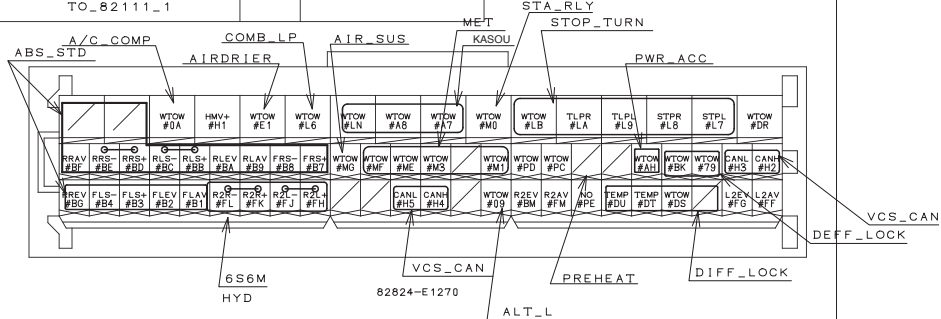




No.	PART NAME	CONN. COLOR	LOCATION	APPLI- CATION	No.	PART NAME	CONN. COLOR	LOCATION	APPLI- CATION	No.	PART NAME	CONN. COLOR	LOCATION	APPLI- CATION
83	COMB_SW_SRC	B			101	DRL_TAIL_DIODE	GR			106	BCM_24P	B		
	 82824-E1150	 82560-4180A	 82824-E0S30											
84	RHEOSTAT	GR												
	 82824-E0U10	 85902-1210A												
85	AIR_GAGE_SNSR_FR	B			103	HAZARD_SW	B			108	BCM_30P	B		
	 82580-8980A	 82560-2100A	 82824-E0Y40											
86	AIR_GAGE_SNSR_RR				104	LIGHT&TURN_SW	B							
	 82580-8980A	 82824-E0S40												
87	PKB_OFF_DIODE	GR			105	BCM_26P	B			109	BCM_12P			
	 82560-4180A 7283-1233-40  85902-1210A	 82580-8740A												
										110	T_TURN_UNIT			
											 82560-2250A			

No.	PART NAME	CONN. COLOR	LOCATION	APPLI- CATION	No.	PART NAME	CONN. COLOR	LOCATION	APPLI- CATION	No.	PART NAME	CONN. COLOR	LOCATION	APPLI- CATION
111	HL_DIODE	B			117	NP_BRAKE_SW_NO	B			122	GRAND_AS2			
	 82560-4230A					 82626-1630A					 82583-1640A			
113	DRL_DIODE_1	GR			118	STOP_LP_SW	B			130	WIPER&RETARDER_SW			
	 82560-4180A					 82626-1310A					 82560-2230A			
115	DRL_ECU(1)	B			119	NP_STOP_LP_SW	B			131	WASHER_PUMP_MOTOR	B		
	 82580-7380A					 82626-1630A					 82580-6820B			
116	DRL_ECU(2)	B			120	FLASHER_SHORT				132	WIPER_MOTOR			
	 82624-E0Y50					 82560-2540A					 82580-7270B			
121					121	GRAND_AS1				134	MIRROR_HEATER_SW	B		
						 82583-1670A					 82624-E0P70			
136					136					136	CIG_LIGHTER			
											 82580-4610A			

No.	PART NAME	CONN. COLOR	LOCATION	APPLI- CATION	No.	PART NAME	CONN. COLOR	LOCATION	APPLI- CATION	No.	PART NAME	CONN. COLOR	LOCATION	APPLI- CATION
138	USB_SOCKET	B			160	A/C_SWITCH				166	A/C_DIODE			
	 82824-E1710					 82824-E0E40					 82560-2030A			
142	AUDIO				161	BLOWER_MOTOR	B			167	RR_HEATER_RLY			
	 82824-E0V20					 82824-E0T40					 S8281-E0R30			
143	FR_SPEAKER_LH				162	BLOWER_SWITCH				168	RR_COOLER_RLY			
	 82824-E0N30					 82824-E0W90					 S8281-E0R30			
144	FR_SPEAKER_RH				163	BLOWER_REGISTER	B			180	ACCEL_SSR	B		
	 82824-E0N30					 82580-9270A					 82824-E1590			
150	IN/RH_SW	L			165	THERMISTOR				181	DPR_REFRESH_SW	B		
	 82560-2860A					 82560-2510A					 82824-E1B10			
151	IN/LH_SW													
	 82560-2840A													



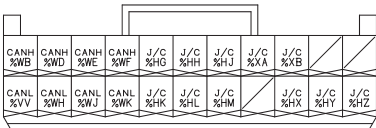
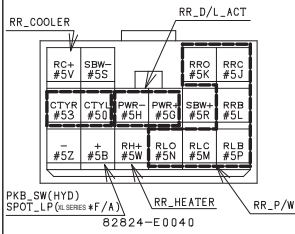
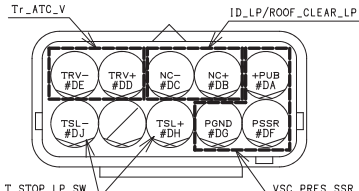
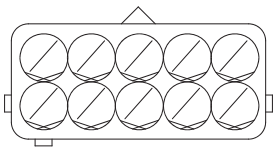
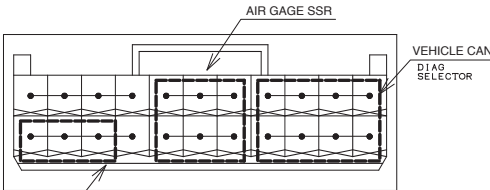

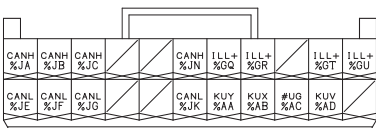
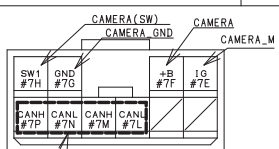



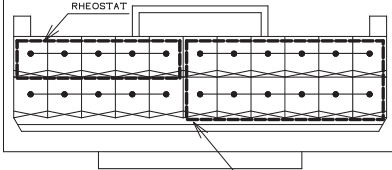


No.	PART NAME	CONN. COLOR	LOCATION	APPLI- CATION	No.	PART NAME	CONN. COLOR	LOCATION	APPLI- CATION	No.	PART NAME	CONN. COLOR	LOCATION	APPLI- CATION
182	VCS-ECU_31P				185	VCS-ECU_35P-A				210	ABS-ECU_E	B		
											 82580-9490A			
184	VCS-ECU_34P				186	VCS-ECU_35P-B				211	ABS-ECU_F	GR		
											 82580-9480A			
										212	ABS-ECU_G	GR		
											 82580-9510A			
										213	ABS-ECU_H			
											 S8281-E0E20			
										214	LANEOFF_WARNING_SW	B		
									 82824-E1690					

No.	PART NAME	CONN. COLOR	LOCATION	APPLI- CATION	No.	PART NAME	CONN. COLOR	LOCATION	APPLI- CATION	No.	PART NAME	CONN. COLOR	LOCATION	APPLI- CATION
215	STEERING_SENSOR	B			240	STP_ATM_DIODE	B		Except TRAILER	250	DLC3	B		
	 82824-E0U70	 82560-3800A	 S8281-E0L90											
217	VSC_OFF_SW	GR				 85902-1200A				251	DIAG	G		
	 82824-E1B30	 S8281-E0M90 CAP: 82585-1250A												
220	MONITOR_MODULE	GR			241	TM_MODE_SW								
	 82824-E0U80	 82560-2550A												
240	STP_ATM_DIODE_3P	B		TRAILER	242	ATM_BK_SW_DIODE	B			252	DIFF_LOCK_ON/OFF_SW	B		
	 82560-4230A  85902-1230A	 82560-3800A  85902-1200A	 82824-E0U00											
										253	DIFF_LOCK_CNG_SW	L		
											 82824-E0U70			

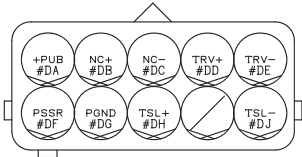




No.	PART NAME	CONN. COLOR	LOCATION	APPLI- CATION	No.	PART NAME	CONN. COLOR	LOCATION	APPLI- CATION	No.	PART NAME	CONN. COLOR	LOCATION	APPLI- CATION
254	DIFF_LOCK_ECU(26P)				261	SLIDE_COUPLER_SW	B			283	HEATER_RLY_SW			
														
	82624-E0S40					82624-E1150					99141-11005			
255	DIFF_LOCK_ECU(24P)				270	CAN_IF	B			284	HEATER_RLY_L			
														
	82624-E0S30					S8261-E0M50					99141-11005			
256	AIR_SUS_DUMP_SW				280	A/C_PRES_SSR	B			285	FAN_CLUTCH_S/V	B		
														
	82580-7210A					82624-E0X30					S8261-E0G00			
258	TELEMATICS_INFO				281	STA_CUT_DIODE	B			400				
														
	S8261-E0M40					82560-3800A								
					282	IDLE_SHUTDOWN_DIODE	B							
														
						82560-3800A								
														
						85902-1200A								







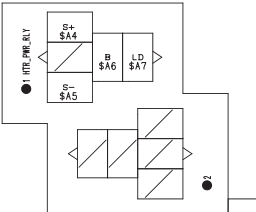




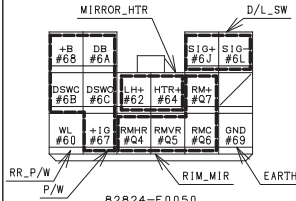




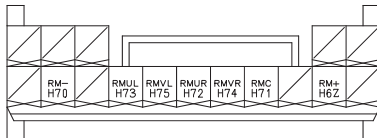




No.	PART NAME	CONN. COLOR	LOCATION	APPLI- CATION	No.	PART NAME	CONN. COLOR	LOCATION	APPLI- CATION	No.	PART NAME	CONN. COLOR	LOCATION	APPLI- CATION
410	TO_82152_LH2				419	TO_EARTH_2				501	CAN_J/C_1	L		
	 D/L_ACT 82580-6050A					 82580-7320A					 82824-E1330			
412	TO_82161				422	TO_82136_10P	B				 82824-E0040			
	 82824-E0B10					 *82824-E0B20_CAP COLOR(B)					 82824-E0Z40 COLOR(L)			
413	TO_82171										CAN_J/C_2			
	 82580-6050A													
414	TO_82171_10P				423	TO_82223			L SERIES	502	 82824-E1330			
	 82580-7340A					 82580-2540A								
417	TO_82236				424	ATM_SHORT			L SERIES		 82824-E0U80			
	 82560-2550A					DIAG_CUT_OFF	GR							
418	TO_EARTH_1				425						 82824-E0Z90 COLOR(B)			
	 82824-E0U40													
						 82824-E0U30								

BM2246A6CAN

No.	PART NAME		CONN. COLOR	LOCATION	APPLI- CATION
1	TO_82131		B		
	<div></div> <p>82824-E0B20</p>				
2	BRAKE_SW(NC)		B		
	<div></div> <p>82580-6820B</p>				
3	VSC_PRES_SSR		B		
	<div></div> <p>S8281-E0G80</p>				
4	T_STOP_LP_SW		B		
	<div></div> <p>S8281-E0E70</p>				
5	Tr_ATC_V		B		
	<div></div> <p>S8281-E0P00</p>				

No.	PART NAME		CONN. COLOR	LOCATION	APPLI- CATION	No.	PART NAME		CONN. COLOR	LOCATION	APPLI- CATION
	HTR_NAGATIVE		B				HTR_POSITIVE		B		
1						7					
	82580-7590A						82580-7590A				
2	HTR_SWITCH		B								
											
	GRAND										
											
3	TO_82131_253		L								
											
4	TO_82131_28		L								
											
5	HTR_RELAY										
											
6											
	*82660-E0060										

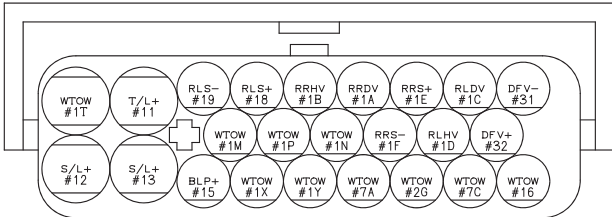
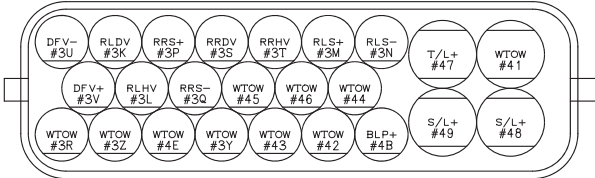


No.	PART NAME	CONN. COLOR	LOCATION	APPLI- CATION	No.	PART NAME	CONN. COLOR	LOCATION	APPLI- CATION
1	TO_82131_16P			W / POWER WINDOW	6	DOOR_LOCK_SW_(DR)	GR		
									
1	TO_82131_LH1			L / POWER WINDOW	7	R/C_MIRROR_LH	B		
									
2	TO_82131_6P				8	RIM_MIRROR_SW			
									
3	D-MASTER_SW				10	DOOR_LOCK_ACT_(DR)	GR		
									
4	P/W_MTR_(DR)	GR			5	HEAT&LIGHT_MIR_LH			
									

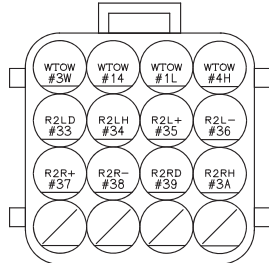
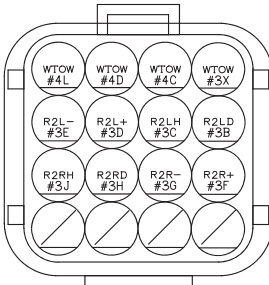
No.	PART NAME		CONN. COLOR	LOCATION	APPLI- CATION
1	TO_82161				
	<div><div><div><div>PWR+ #6P</div><div>RRB #6R</div></div><div><div></div><div>RRC #6S</div></div><div><div>PWR- #6Q</div><div>RRO #6T</div></div></div><div>82824-E0U10</div></div>				
2	RR / RH _ SW				
	<div><div><div><div>RRB H9A</div><div>RRO H9B</div><div>RRC H9C</div><div>RRCM H9D</div><div>RRCM H9E</div></div><div>82560-3250A</div></div></div>				
3	P / W _ MTR _ RR _ RH		GR		
	<div><div><div><div>PWM5 H5M</div><div>PWM6 H5N</div></div><div>82580-9420A</div></div></div>				
4	DOOR _ LOCK _ RR _ RH				
	<div><div><div><div>PWR+ H6S</div><div>PWR- H6T</div></div><div>82580-7660B</div></div></div>				
5	W / S _ DOOR _ DMY				
	<div><div><div><div>1 %WU</div></div><div>SPLCE-00001</div></div></div>				



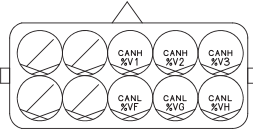


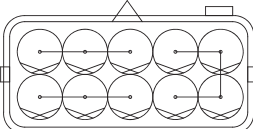










No.	PART NAME	CONN. COLOR	LOCATION	APPLI- CATION	No.	PART NAME	CONN. COLOR	LOCATION	APPLI- CATION	No.	PART NAME	CONN. COLOR	LOCATION	APPLI- CATION
1	TO_82131_16P				11	CTY_SW_RR_L				16	COOLER_MAGNET_VALVE	GR		
	<div><div><div><div>RRC #5J</div><div>RRO #5K</div><div></div><div>SBW- #5S</div><div>RC+ #5V</div></div><div><div>RRB #5L</div><div>SBW+ #5R</div><div>PWR+ #5G</div><div>PWR- #5H</div><div>CTYL #5Q</div><div>CTYR #53</div></div><div><div>RLB #5P</div><div>RLC #5M</div><div>RLO #5N</div><div>RH+ #5W</div><div>+ #5B</div><div>- #5Z</div></div></div></div> <div>82824-E0050</div>					<div><div>LH+W D0Z</div></div> <div>82824-E0U30</div>	<div><div><div>MVCN G8K</div><div>+24 G8J</div></div></div> <div>82580-6600B</div>							
2	CTY_SW_FR_R				12	RR_HEATER_UNIT	B				<div><div></div></div> <div>82580-6590B_CAP COLOR(GR)</div>			
	<div><div>RH + D0Z</div></div> <div>82824-E0U30</div>					<div><div><div>P1 G5Y</div><div>+ G4B</div><div>P2 G5Z</div><div></div></div></div> <div>82580-8340B</div>								
3	CTY_SW_FR_L				13	RR_HEATER_SW	GR			50	TO_82153_RH			
	<div><div>LH + D01</div></div> <div>82824-E0U30</div>					<div><div><div>AH1+ G54</div><div>AH- G53</div><div>AH+ G52</div><div></div></div></div> <div>82580-8380A</div>	<div><div><div>PWR- #6Q</div><div></div><div>PWR+ #6P</div></div><div><div>RRO #6T</div><div>RRC #6S</div><div>RRB #6R</div></div></div> <div>82580-6050A</div>							
4	SPOT_LAMP	B			14	RR_COOLER_UNIT	B			51	TO_82153_LH			
	<div><div><div></div><div>CC9</div><div>CC8</div></div></div> <div>82580-9420A</div>					<div><div><div>+ G4C</div><div>COOL G4E</div><div>S- G4U</div><div>M1 G1E</div><div>M2 G1D</div><div>GND G60</div></div></div> <div>82560-2920A</div>	<div><div><div>PWR- #6V</div><div></div><div>PWR+ #6U</div></div><div><div>RLO #6Y</div><div>RLC #6X</div><div>RLB #6W</div></div></div> <div>82580-6050A</div>							
5	PKB_SW	B			15	RR_BLOWER_SW								
	<div><div><div></div><div>N/C- E2M</div><div>N/C+ E2L</div></div></div> <div>82560-2940A</div>					<div><div><div>M1 G26</div><div>H1 G28</div><div>GND G06</div><div>LO G24</div></div></div> <div>82580-6920A</div>								
7	S/B_SW	B												
	<div><div><div>SBW- F02</div><div>SBW+ F01</div></div></div> <div>82580-6820B</div>													
10	CTY_SW_RR_R													
	<div><div>RH+W D01</div></div> <div>82824-E0U30</div>													

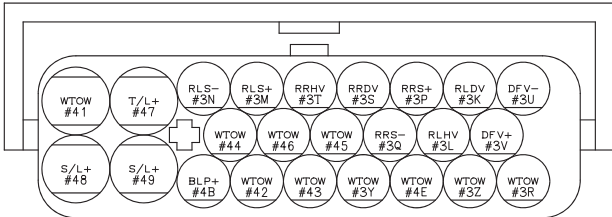
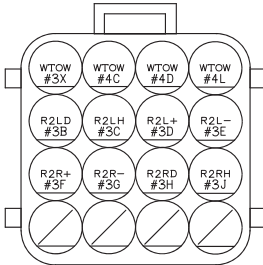

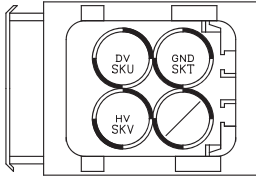

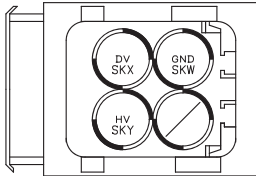
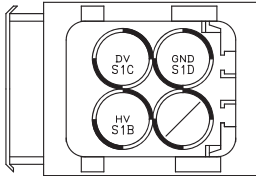

















No.	PART NAME		CONN. COLOR	LOCATION	APPLI- CATION
1	TO_82111_24P		B		
	<div></div> <p>82824-E0K00</p>				
2	TO_82177_24P		B		
	<div></div> <p>82560-1320A</p>				














No.	PART NAME		CONN. COLOR	LOCATION	APPLI- CATION
2	RR_COMB_LH_OUT		B		
	<div><div><div></div><div>RCB- ZWC</div></div><div><div></div><div>S/L+ ZVZ</div></div><div><div></div><div>T/L+ ZWB</div></div><div><div></div><div>BLP+ ZWA</div></div></div> <div>S8281-E0D70</div>				
3	RR_COMB_RH		B		
	<div><div><div></div><div>RCB- C1V</div></div><div><div></div><div>S/L+ C1X</div></div><div><div></div><div>T/L+ C1W</div></div><div><div></div><div>BLP+ C1Q</div></div></div> <div>S8281-E0D70</div>				

No.	PART NAME	CONN. COLOR	LOCATION	APPLI- CATION
1	TO_82111_16P	B		
	<div><p>S8281-E0Q90</p></div>			
2	TO_82177_16P	B		
	<div><p>S8281-E0Q80</p></div>			

No.	PART NAME	CONN. COLOR	LOCATION	APPLI- CATION	No.	PART NAME	CONN. COLOR	LOCATION	APPLI- CATION	No.	PART NAME	CONN. COLOR	LOCATION	APPLI- CATION	
1	TO_82131_6P				8	DOME_LAMP_RH				20	CAN_J/C	B			
															
2	TO_82131_10P				9	DOME_LAMP_LH									
															
3	ROOF_C/L_LH	B			12	CAMERA	B								
															
4	ID_LAMP_LH	B			13	DOME_LAMP_RR_CTR									
															
5	ID_LAMP_CTR	B			14	DOME_LAMP_RR_RH									
															
6	ID_LAMP_RH	B			15	DOME_LAMP_RR_LH									
															
7	ROOF_C/L_RH	B													
															

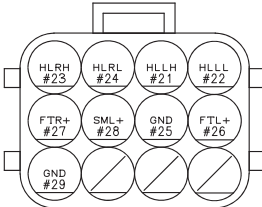








No.	PART NAME	CONN. COLOR	LOCATION	APPLI- CATION	No.	PART NAME	CONN. COLOR	LOCATION	APPLI- CATION	No.	PART NAME	CONN. COLOR	LOCATION	APPLI- CATION
1	TO_82164_24P	B			4	ABS_SENSOR_RR_LH_TCS	B		FULL AIR BRAKE L SERIES	8	BZR_OFF_SW	B		
	 82824-E0K00													
2	TO_82169_16P	B			4	ABS_SENSOR_RR_LH_TCS	B		FULL AIR BRAKE XL SERIES	9	SPG_BRK_SW	DG		
	 S8281-E0Q90													
3	ABS_SENSOR_RR_LH	B		HYDRAULIC BRAKE	5	ABS_SENSOR_RR_RH	B		FULL AIR BRAKE L SERIES	12	MODULATOR_R2_LH	B		
	 82560-4720A					 S8281-E0F50								
					5	ABS_SENSOR_RR_RH	B		HYDRAULIC BRAKE L SERIES  XL SERIES	13	MODULATOR_R2_RH	B		
						 82560-4720A		 S8281-E0F50						
										14	RR_AXLE_PACKAGE_RH	B		
											 S8281-E0F50			

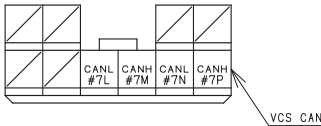

No.	PART NAME	CONN. COLOR	LOCATION	APPLI- CATION	No.	PART NAME	CONN. COLOR	LOCATION	APPLI- CATION	No.	PART NAME	CONN. COLOR	LOCATION	APPLI- CATION
15	RR_AXLE_PACKAGE_LH	B			19	A/S_DUMP_EXH_M/V	B			22	RR_COMB_LH_1N	GR		
	 S8281-E0F40	 S8281-E0G00	 S8281-E0D60											
16	RR_AXLE_PACKAGE_ATC	B			21	*S8281-E0G10_CAP				23	L/PRES_SW_3	B		
	 82824-E1640	 *S8281-E0G10_CAP	 82580-6820B											
						BACK_BUZZER	B				 82560-1670A_CAP			
	 S8286-E0010	 82580-7140B	 82560-7130B_CAP											
18	A/S_DUMP_ACT_M/V	B				 S8281-E0G00				24	RR_COMB_LH_1	B		
	 *S8281-E0G10_CAP	 82828-1100A												
										25	RR_COMB_LH_2	B		
						 82828-1100A								
										26	RR_COMB_RH	B		
						 82828-1100A								


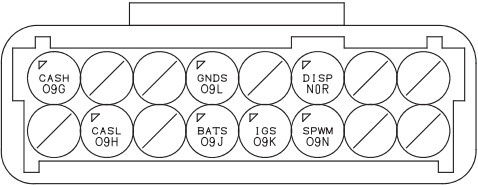
No.	PART NAME	CONN. COLOR	LOCATION	APPLI- CATION	No.	PART NAME	CONN. COLOR	LOCATION	APPLI- CATION	No.	PART NAME	CONN. COLOR	LOCATION	APPLI- CATION
27	L I C E N S E _ L A M P	B			32	R / D _ M / V	B			41	A B S _ S E N S O R _ R 2 _ R H	B		
	 82560-1670A					 S8281-E0000					 HEAVY DUTY 82560-4720A			
	 82580-6820B_CAP				35	M _ D I F F _ L O C K _ R 2 _ S W	GR			45	S L I D E / C _ M / V	B		
	 S8281-E0N90					 S8281-E0000								
30	M _ D I F F _ L O C K _ R 1 _ S W	GR				 S8281-E0N90				50	 *S8281-E0L20_CAP COLOR(GR)			
	 *S8281-E0L20_CAP COLOR(GR)					 HEAVY DUTY 82560-4720A					 SPLCE-W0001			
31	M N / D _ M / V	B				 S8281-E0000								
	 *S8281-E0G10_CAP													

No.				APPLI- CATION
	PART NAME	CONN. COLOR	LOCATION	
1	INTAKE_HTR			
	<div><div><div><div>6</div><div></div></div><div># B12V A6G</div></div><div>*7003-2070-02</div></div>			
2	INTAKE_HTR_RLY			
	<div><div><div><div>8</div><div></div></div><div># F A4W</div></div><div>*7003-1171-02</div></div>			



No.	PART NAME	CONN. COLOR	LOCATION	APPLI - CATION	No.	PART NAME	CONN. COLOR	LOCATION	APPLI - CATION
1	TO_82111	B			5	HEADLAMP_RH	B		
	 S8281-E0R10	 82580-2160A							
2	LED_HEADLAMP_LH	B			6	SIDE_TURN_LAMP_LH	GR		
	 82580-8490B	 82580-6770B							
3	LED_HEADLAMP_RH	B			7	SIDE_TURN_LAMP_RH	GR		
	 82580-8490B	 82580-6770B							
4	HEADLAMP_LH	B			8	F /TURN&MARKER_LP_LH	B		
	 82580-2160A	 82560-1730A							
					9	F /TUNRN&MARKER_RH	B		
						 82560-1730A			

No.	PART NAME	CONN. COLOR	LOCATION	APPLI- CATION
1	CMS_SHORT			
	 82580-7210A			
2	FLASHER_SHORT			
	 82560-2550A			



No.				APPLI- CATION
	PART NAME	CONN. COLOR	LOCATION	
1	TO_82131			
	<div><p>82824-E0T90</p></div>			
2	SELECTOR	GR		
	<div><p>82828-1600A</p></div>			

No.				APPLI- CATION
	PART NAME	CONN. COLOR	LOCATION	
2	BATTERY			L SERIES
	<div><div>10</div><div># -(1) A49</div></div> <div>82675-E0450</div>			XL SERIES 59L(15.6GAL)
2	BATTERY			XL SERIES 28L(7.4GAL)
	<div><div>10</div><div># -(1) A49</div></div> <div>*82583-1780A</div>			
3	STARTER 1			L SERIES
	<div><div>10</div><div># E A3Z</div></div> <div>82675-E0450</div>			
3	STARTER 1			XL SERIES 28L(7.4GAL)
	<div><div>12</div><div># E A3Z</div></div> <div>*7003-1212-02</div>			
3	STARTER 1			XL SERIES 59L(15.6GAL)
	<div><div>12</div><div># E A3Z</div></div> <div>*82675-E0600_</div>			

No.				APPLI- CATION	No.				APPLI- CATION
	PART NAME	CONN. COLOR	LOCATION			PART NAME	CONN. COLOR	LOCATION	
1	STARTER_GND			L SERIES 12V- 130A / 135A	2	ALT-			12V- 130A / 135A
	<div><div><div>10</div><div>#E A3Z</div></div><div></div><div>*7003-2072-02</div></div>					<div><div><div>6</div><div>#E A41</div></div><div></div><div>*82675-36040</div></div>			
1	STARTER_GND			L SERIES 12V- 200A / 160A					
	<div><div><div>10</div><div>#E A3Z</div></div><div></div><div>*7003-2091-02</div></div>								
1	STARTER_GND			XL SERIES 12V- 130A / 135A					
	<div><div><div>12</div><div>#E A3Z</div></div><div></div><div>*7003-1182-02</div></div>								
1	STARTER_GND			XL SERIES 12V- 180A / 200A					
	<div><div><div>12</div><div>#E A3Z</div></div><div></div><div>*7003-1192-02</div></div>								
2	ALT-			12V- 160A / 180A / 200A					
	<div><div><div>6</div><div>#E A41</div></div><div></div><div>*7003-1965-02</div></div>								

No.				APPLI- CATION
	PART NAME	CONN. COLOR	LOCATION	
1	STA_HOUSING			
	<div><div><div>12</div><div>#H #0W</div></div><div></div><div>*7003-1212-02</div></div>			
2	STA_GND_TERMINAL			
	<div><div><div>12</div><div>#G #0V</div></div><div></div><div>*7003-1212-02</div></div>			

No.				APPLI- CATION
	PART NAME	CONN. COLOR	LOCATION	
1	CAB_GRAND(G3)			
	<div><div><div>8</div><div># g1 Z01</div></div><div>SR142-00920</div></div>			
2	CHASS_GRAND(G3)			FULL AIR BRAKE
	<div><div><div>10</div><div># g1 Z48</div></div><div>*82675-E0520</div></div>			
2	CHASS_GRAND(G3)			HYDRAULIC BRAKE
	<div><div><div>10</div><div># g1 Z48</div></div><div>SR142-01120</div></div>			

No.				APPLI- CATION
	PART NAME	CONN. COLOR	LOCATION	
1	AIR_DRIER	B		
	<div><p>82560-4660A</p></div>			
2	TO_82111	B		
	<div><p>82580-7170B</p></div>			



No.			APPLI- CATION
	PART NAME	CONN. COLOR	
1	FUEL_SENDER_RH	DG	
	<div><div>SSD</div><div><div><div></div></div><div><div>FSDE E22</div></div><div><div>FSD+ E21</div></div></div></div> <div>82560-4350A</div>		
2	FUEL_SENDER_WTOW2	DG	
	<div><div>SSD</div><div><div><div>1 &amp;F A</div></div><div><div>2 &amp;F B</div></div><div><div></div></div></div></div> <div>82824-E1080</div>		

No.				APPL I - CATION
	PART NAME	CONN. COLOR	LOCATION	
1	STARTER_B			12V- 130A / 135A
	<div><div><div>12</div><div># B A3X</div></div><div></div><div>*7003-2131-02</div></div>			
1	STARTER_B			12V- 160A / 200A / 180A
	<div><div><div>12</div><div># B A3X</div></div><div></div><div>*82675-E0560</div></div>			
2	ALT+			12V-135A
	<div><div><div>8</div><div># B A40</div></div><div></div><div>*82675-E0110</div></div>			
2	ALT+			12V- 160A / 200A / 180A
	<div><div><div>8</div><div># B A40</div></div><div></div><div>*82583-1960A</div></div>			
2	ALT+			12V-130A
	<div><div><div>8</div><div># B A40</div></div><div></div><div>*7003-1171-02</div></div>			

No.				APPLI- CATION
	PART NAME	CONN. COLOR	LOCATION	
1	INTAKE_HTR_BATTERY			
	<div><div><div>8</div><div></div></div><div>#LD +F2</div><div>*7003-1171-02</div></div>			
2	INTAKE_HTR_RLY			
	<div><div><div>8</div><div></div></div><div>#S A4V</div><div>*7003-1171-02</div></div>			

No.			APPLI- CATION
	PART NAME	CONN. COLOR	LOCATION
1	BATTERY2_(+)		
	<div><div><div>10</div><div># +(2) A4A</div></div><div></div><div>99142-14100</div></div>		
2	JUMP_STUD_POS		
	<div><div><div>10</div><div># +S J A44</div></div><div></div><div>99142-14100</div></div>		
3	DISCONNECT_SW(+)		
	<div><div><div>10</div><div># BT+ ACL</div></div><div></div><div>99142-14100</div></div>		
4	DISCONNECT_SW(-)		
	<div><div><div>10</div><div># BT- ACM</div></div><div></div><div>99142-14100</div></div>		
5	TO_82111	B	
	<div><div><div><div>SW #AZ</div></div><div></div><div>82824-E0Y80</div></div></div>		

## 6. METRIC/U.S. CUSTOMARY UNIT EQUIVALENTS

Multiply:	by:	to get:	Multiply:	by:	to get:
<b>LINEAR</b>					
inches	x 25.4	= millimeters (mm)		x 0.03937	= inches
inches	x 2.54	= centimeters (cm)		x 0.3937	= inches
feet	x 0.3048	= meters (m)		x 3.281	= feet
<b>AREA</b>					
inches <sup>2</sup>	x 645.16	= millimeters <sup>2</sup> (mm <sup>2</sup> )		x 0.00155	= inches <sup>2</sup>
inches <sup>2</sup>	x 6.452	= centimeters <sup>2</sup> (cm <sup>2</sup> )		x 0.155	= inches <sup>2</sup>
feet <sup>2</sup>	x 0.0929	= meters (m <sup>2</sup> )		x 10.764	= feet <sup>2</sup>
<b>VOLUME</b>					
inches <sup>3</sup>	x 16387.0	= millimeters <sup>3</sup> (mm <sup>3</sup> )		x 0.000061	= inches <sup>3</sup>
inches <sup>3</sup>	x 16.387	= centimeters <sup>3</sup> (cm <sup>3</sup> )		x 0.06102	= inches <sup>3</sup>
inches <sup>3</sup>	x 0.01639	= liters (l)		x 61.024	= inches <sup>3</sup>
quarts	x 0.94635	= liters (l)		x 1.0567	= quarts
gallons	x 3.7854	= liters (l)		x 0.2642	= gallons
feet <sup>3</sup>	x 28.317	= liters (l)		x 0.03531	= feet <sup>3</sup>
feet <sup>3</sup>	x 0.02832	= meters <sup>3</sup> (m <sup>3</sup> )		x 35.315	= feet <sup>3</sup>
fluid oz	x 29.57	= milliliters (ml)		x 0.03381	= fluid oz
<b>MASS</b>					
ounces (av)	x 28.35	= grams (g)		x 0.03527	= ounces (av)
pounds (av)	x 0.4536	= kilograms (kg)		x 2.2046	= pounds (av)
tons (2000 lb)	x 907.18	= kilograms (kg)		x 0.001102	= tons (2000 lb)
tons (2000 lb)	x 0.90718	= tonne (t)		x 1.1023	= tons (2000 lb)
<b>FUEL ECONOMY</b>					
miles/gal	x 0.42514	= kilometers/liter (km/l)		x 2.3522	= miles/gal
gal/mile	x 2.3522	= liters/kilometer (l/km)		x 0.42514	= gal/mile
gal/mile	x 235.22	= liters/100 kilometers (l/100 km)		x 0.004251	= gal/mile
<b>POWER</b>					
horsepower	x 0.746	= kilowatts (kw)		x 1.34	= horsepower
ft-lbf/min	x 0.0226	= watts (W)		x 44.25	= ft-lbf/min
<b>TORQUE</b>					
pound-inches	x 0.11298	= newton-meters (N·m)		x 8.851	= pound-inches
pound-feet	x 1.3558	= newton-meters (N·m)		x 0.7376	= pound-feet
<b>VELOCITY</b>					
miles/hour	x 1.6093	= kilometers/hour (km/h)		x 0.6214	= miles/hour
kilometers/hr	x 0.27778	= meters/sec (m/s)		x 3.600	= kilometers/hr
miles/hour	x 0.4470	= meters/sec (m/s)		x 2.237	= miles/hour
<b>COMMON METRIC PREFIXES</b>					
	mega (M)	= 1,000,000		centi (c)	= 0.01
	kilo (k)	= 1,000		milli (m)	= 0.001
	hecto (h)	= 100		micro (μ)	= 0.000001